



FALLTECH[®]

Fall Protection. Precision Engineered.

ABOUT FALLTECH®

Established in 1991, FallTech® began manufacturing only essential personal fall arrest components for select channel partners. During the next decade while demand grew and regulations were added, FallTech® increasingly expanded into many additional fall arrest solutions. Throughout this time, controlling and maintaining our in-house design, testing, manufacturing and sourcing processes became the foundational structure we continue to uphold today from our operations in Compton CA.

Fall Protection safety is more than a job for us – it's our purpose and our enterprise. Our ISO 17025 accredited test lab ensures FallTech® products meet or exceed ANSI Standards and OSHA Regulations and always deliver uncompromised performance and resolute quality for our users even in their most demanding conditions.

28 years on from the basic provision of body belts and lanyards, the standards have changed and some regulations shifted but our commitment to your safety has not hesitated.



CONTENTS

Anchorage Steel, concrete, I-Beams, roofing, multi-use and specialty application anchorage solutions.	5 - 15
Body Wear Full Body Harnesses, Body Belts, Seats and accessories.	17 - 58
Connectors Energy Absorbing, Positioning and Restraint Lanyards, Vertical Lifelines and Fall Arresters, and Carabiners.	61 - 80
Devices Self-retracting Lifelines and Rescue and Descent Devices.	83 - 96
Confined Space Portable Davit Systems, Fixed Bases, Tripod Systems and Retrieval Devices.	99 - 105
Horizontal Systems Temporary synthetic rope and steel cable systems, stanchions and guardrail.	107 - 113
Dropped Tool Prevention Tool Tethers and Tool Attachments.	115 - 117
User Kits Prepacked kits for specific trades	119 - 122

ANCHORAGES

Selecting an appropriate anchorage connector for your fall arrest system is a critical element in protecting yourself and others from the flood of fall hazards that proliferate work sites everywhere. FallTech® anchorage connectors are designed to meet a wide variety of requirements for general and specific user applications. Solutions for temporary and permanent installation to steel structures, I-beams, concrete, roofing and specialty constructs not only provide worker confidence and reliability, they deliver that critical connection point for your fall arrest system.

Steel Anchorages // Bolt-on, Weld-on and Sling




I-Beam // Fixed, Trailing and Overhead



Concrete // Single-use and Reusable



Roofing // Temporary and Reusable

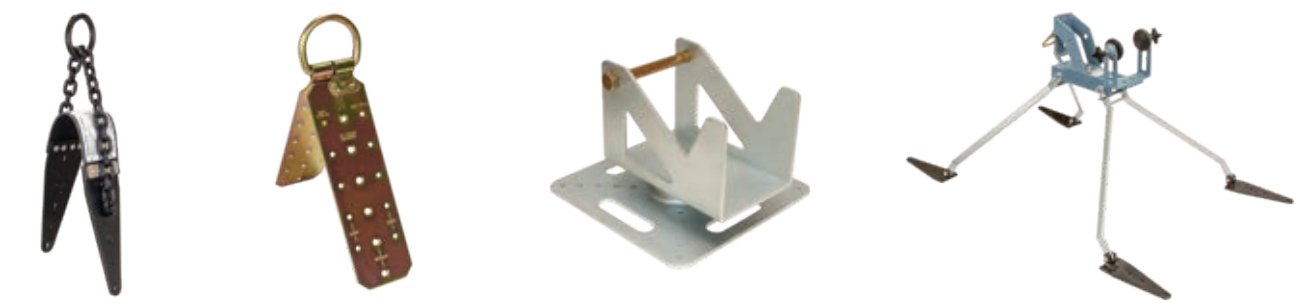

Multi-Purpose and Specialty



SOLUTIONS FOR THE MOST CHALLENGING JOBS

7393S | Rotating Bolt-on D-Ring

Permanent



Bolt-on D-ring rotates 360° and pivots 180°, features 10,000 lbs static strength and includes Grade 8 bolt and nut for permanent installation.

7393W | Rotating Weld-On D-Ring

Permanent



Weld-on D-ring rotates 360° and pivots 180°, features 10,000 lbs static strength and includes bolt and weld-on puck for permanent installation.

7393 | Rotating Bolt-On D-Ring

Temp/Perm



Bolt-on D-ring rotates 360° and pivots 180°, features 10,000 lbs static strength and requires user-supplied bolt or puck for temporary or permanent installation.

7393P | Weld-on Puck with Bolt

Permanent



Weld-on Puck for use with 7393 Rotating D-ring allows user to easily move single D-ring to multiple welded puck locations.

7435 | Bolt-on D-ring

Permanent



Bolt-on D-ring features large 2 1/4" x 3 1/4" internal dimension and integral threaded stud and Grade 8 nut for permanent installation to 7/8" max steel substrate thickness.

7435H | Bolt-On D-ring

Permanent



Bolt-on D-ring features large 2" x 3 1/4" internal dimension and 5/8" hole for user-supplied bolt and nut for permanent installation.

7414 | Bolt-on D-ring Plate

Permanent



Bolt-on D-ring features 2" x 4 1/2" plated alloy steel anchoring plate and D-ring with 1/2" bolt holes requiring user-supplied fasteners for permanent installation.

7414SS | Bolt-on D-ring Plate

Permanent



Bolt-on D-ring features 2" x 4 1/2" stainless steel anchoring plate and plated steel D-ring with 1/2" bolt holes requiring user-supplied fasteners for permanent installation.

7414P | Weld/Bolt-on D-ring Plate


Permanent



Weld and Bolt-on D-ring features 2" x 4 1/2" unplated steel anchoring plate and plated steel D-ring with 1/2" bolt holes; unplated anchoring plate is ideal for permanent weld-on installation.

7402 | Wire Form Hand-operated

Temporary

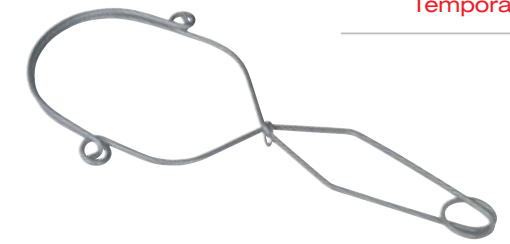

Hand-operated anchor with simple squeeze-open attachment features 1/4" diameter stainless steel for temporary use on round overhead steel structures.

Item#	Size	Length
7402	2" to 3" max diameter	13"
7403	2" to 4" max diameter	15"
7407	2" to 5" max diameter	16"

7408 | Toggle-through Eyebolt

Temporary



Toggle-through moveable eyebolt anchor installs to 1/4" max steel substrate thickness and fits hole sizes from 13/16" min to 1 1/4" max for temporary and reusable installation in steel structures.

7428 | Pass-through Cable Choker

Temporary



6' pass-through choker anchor features 1/4" galvanized steel cable available uncoated and with vinyl coating. Large and medium size O-rings allow simple pass-through choke-on installation leaving smaller O-ring as connection point for lanyard or SRL in temporary installation.

Item #	Length	Materials
7427	4'	1/4" Vinyl Coated Galvanized Cable
7428	6'	
742808	8'	3" and 2 1/4" Alloy Steel D-rings
7437	4'	1/4" Galvanized Cable
7438	6'	
743808	8'	3" and 2 1/4" Alloy Steel D-rings

Additional lengths available

84202DC | Carabiner Cable Sling

Temporary



6' carabiner sling anchor features 1/4" galvanized steel cable available uncoated and with vinyl coating. Captivated carabiner secures sling around structure leaving one D-ring for connecting lanyard or SRL in temporary installation.

Item#	Length	Materials
84202D3	3'	1/4" Galvanized Cable
84202D4	4'	
84202D	6'	2 1/4" Alloy Steel D-rings
84202DC3	3'	1/4" Vinyl Coated Galvanized Cable
84202DC4	4'	
84202DC	6'	2 1/4" Alloy Steel D-rings

Additional lengths available

I-BEAM ANCHORAGES

Built for overhead I-beam anchorage, the FallTech® Beam Trolley is constructed with aluminum alloy and stainless steel components making it both lightweight and durable and, it boasts a wider range of fit versus comparable solutions. Easy to adjust and requiring no tools for installation, the trolley provides improved productivity and user efficiency. The beam trolley will effortlessly travel with the user and is ideally suited for use with SRLs in general industry applications.

7712 Beam Trolley Anchor



Meets ANSI Z359.18-2017

FEATURES



360° rotating forged aluminum D-ring.



Stainless steel wheel guards and wheel bearings.



High temperature resistance Nylacast wheels.



Secondary locking detent pin.

7538 Trailing Beam Clamp

Temporary



Trailing beam anchor features dual-clamp adjustment with aluminum crossbar and jaws, swiveling D-ring and bronze slider pads. Fits 3" to 14½" wide beam flanges up to 1¾" thick for temporary and mobile use on horizontal I-beams.

7530 Trailing Beam Clamp

Temporary



Trailing beam anchor features dual-clamp adjustment with aluminum crossbar and steel jaws with nylon slider pads and concealed adjustment latches. Plated steel D-ring remains centered on crossbar and fits 3" to 14" wide beam flanges up to 1¼" thick for temporary and mobile use on horizontal I-beams.

7531 Trailing Beam Clamp

Temporary



Trailing beam anchor features single-clamp adjustment with aluminum crossbar and steel jaws with nylon slider pads and concealed adjustment latch. Plated steel D-ring slides with adjustment and fits 3" to 14½" wide beam flanges up to 1¼" thick for temporary and mobile use on horizontal I-beams.

7535 Vertical Beam Clamp

Permanent



Vertical beam anchor features single-jaw adjustment with aluminum crossbar and jaws. Threaded crossbar and knurled rings provide fine adjustment for fitting 3¾" to 12¾" wide beam flanges up to 2¼" thick for permanent installation on vertical and horizontal I-beams.

7536: Vertical Beam Clamp fits 7¾" to 24½" wide flanges

7533 Trailing Beam Clamp

Temporary



Recessed under-jaw ball bearings

Trailing beam anchor features dual-clamp adjustment with aluminum crossbar and jaws. Uniquely includes recessed under-jaw ball bearings for improved mobility and threaded crossbar with knurled rings for fine adjustment. Fits 3" to 12¾" wide beam flanges up to 1¾" thick for temporary mobile use on horizontal I-beams.

7534: Trailing Beam Clamp fits 3" to 18¼" wide flanges.

7712 Beam Trolley


Temp/Perm



Beam trolley anchor features single-trolley adjustment with aluminum crossbar and wheel plates. Includes aluminum swiveling D-ring and high density Nylacast wheels and fits 4" to 18" wide beam flanges up to 1¾" thick for permanent or temporary use on overhead horizontal I-beams.

7711 Heavy Duty Beam Trolley

Temp/Perm

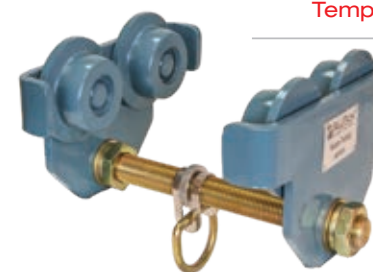

Beam trolley anchor features single-trolley adjustment with threaded steel crossbar and adjustment rings plus steel wheels and wheel plates. Fits 3" to 18" wide beam flanges up to 2¼" thick for permanent or temporary use on overhead horizontal I-beams.



7440S | Swivel-eye Expansion Wedge


Temporary



Swivel-eye expansion wedge anchor features 5,000 lbs. static strength, requires 3½" min hole depth and allows ¾" max hole diameter for temporary use in cured concrete.

7440 | Swaged-eye Expansion Wedge

Temporary

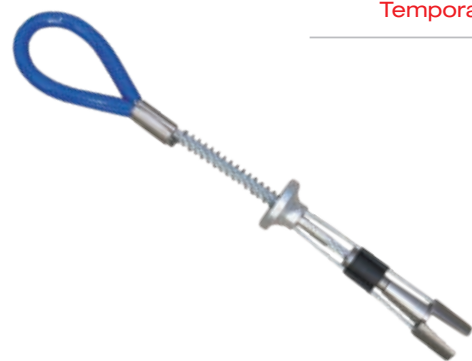

Swaged-eye expansion wedge anchor features 5,000 lbs. static strength, requires 3½" min hole depth and allows ¾" max hole diameter for temporary use in cured concrete.

7441 | Swaged Thimble Expansion Wedge

Temporary



Swaged thimble expansion wedge anchor features 10,000 lbs. static strength, requires 4½" min hole depth and allows 1" max hole diameter for temporary use in cured concrete.

7442 | Swaged-eye Toggle-through

Temporary



Swaged-eye toggle-through anchor features 5,000 lbs static strength, requires 6" min hollow core with 1¾" min web thickness and allows ¾" max hole diameter for temporary use in precast hollow-core concrete.

7448L | Pour-in-place Embed with Loop

Temporary



48" pour-in-place embed with connection loop and jacketed web, for loop-over or choke-on installation to embedded rebar during concrete pour. Remove and dispose after temporary use in cured concrete.

7472L: 6' Embed Anchor.

7448 | Pour-in-place Embed with D-ring

Temporary



48" pour-in-place embed anchor with connection D-ring and jacketed web, for loop-over or choke-on installation to embedded rebar during concrete pour. Remove and dispose after temporary use in cured concrete.

Additional lengths available up to 12'

Item#	Length
7425	2'
7436	3'
7472	6'

7451A | Rotating D-ring with Concrete Screw

Temporary



Rotating D-ring anchor with concrete screw features plated stainless steel anchoring plate with alloy steel connecting D-ring. Precision-cut bushing provides 360° D-ring rotation for temporary or permanent installation in cured concrete.

7451AC | Rotating D-ring

Temporary



Rotating D-ring anchor for temporary or permanent use in concrete or steel requires user-supplied fasteners. Features plated stainless steel anchoring plate with alloy connecting steel D-ring and precision-cut bushing provides 360° D-ring rotation.

7451A1 | Thread-cutting Concrete Screw

Concrete



¾" x 5½" thread-cutting concrete screw for concrete installation with Rotating D-ring Anchor available in single and multi-pack quantities.

7451A1: 1 Pack.
7451A5: 5 Pack.
7451A10: 10 Pack.

7451C | Rotating D-ring with Expansion Bolt

Temporary



Rotating D-ring anchor with torque-indicating expansion bolt features plated stainless steel anchoring plate with alloy steel connecting D-ring. Precision-cut bushing provides 360° D-ring rotation for temporary or permanent installation in cured concrete.

7451C1 | Torque-indicating Expansion Bolt

Concrete



0.7" x 4¾" torque-indicating expansion bolt for concrete installation with Rotating D-ring Anchor available in single and multi-pack quantities.

7451C1: 1 Pack.
7451C5: 5 Pack.
7451C10: 10 Pack.



7444 | Single-use

Temporary



Single-use roof anchor features 6" x 1½" bend-in-place nailing plates with ¾" connecting eye for temporary use on wood structures. Includes 16D nails for roof ridge installation.

7410 | Hinged Reusable

Temporary



Reusable roof anchor features hinged design, 10" x 3" anchoring plates and 2½" connecting D-ring for temporary reusable installation on wood structures. Includes 16D nails for roof ridge or field installation.

7410M | Hinged Reusable

Temporary



Reusable anchor features hinged design, 10" x 3" anchoring plates and 2½" connecting D-ring for temporary reusable installation on metal deck. Includes 1/4" self-tapping sheet metal screws.

7493A | Chain O-Ring

Temporary



Reusable chain anchor features 9" x 3" anchoring plates and 5/16" Grade 80 chain with connecting O-ring for temporary reusable installation on wood roof structures. Includes 16D nails for roof ridge or field installation and, 2½" lag screws for use with HLLs.

7493B1 | D-ring Plate

Temporary



Reusable D-ring plate anchor features 9" x 3" anchoring plate and 2½" connecting D-ring for temporary reusable installation on wood roof structures. Includes 3" Grade 5 lag screws for roof ridge or field installation.

7432 | Dual Truss

Temporary



Dual Truss anchor is ideally suited for use with HLLs anchored along roof ridge. Features dual-installation methods including over-sheathing screw-down and interior under-truss for temporary and reusable applications on wood roof structures. Includes 1½" lag screws for over-sheathing install plus 4" and 6" U-bolts for interior under-truss fastening.



7431 | Roof Ridge Twin-D

Permanent



Twin-D under ridge cap anchor features 12" stainless steel nailing plate with 2½" connecting D-rings. Includes 16D stainless steel nails for permanent roof ridge installation on wood roof structures.

7434 | Under-tile Single-D

Permanent



Single-D under-tile anchor features 17" stainless steel nailing plate with 2" connecting D-ring. Includes 16D stainless steel nails for permanent roof ridge or field installation on wood roof structures.

7434S: 8" Length.

7429SSK | Permanent Truss Anchor Set

Permanent



Truss anchor set features 10¾" stainless steel post with 11/16" connecting eye. Includes weather resistant cap and flange plus 4D stainless steel nails for permanent roof truss installation on wood roof structures.

7429SS: Anchor only.

7395D | Rotating SRL Anchor


Temporary



Rotating SRL anchor is ideal for temporary and reusable applications on flat and low-slope wood and metal roof structures and on steel decking. Features standard 5" wide cradle for Contractor SRLs and includes 2½" lag and sheet metal screws for wood roof and steel deck installation.

7395A | Adjustable Rotating SRL Anchor

Temporary

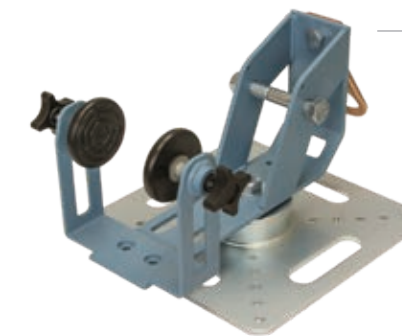

Rotating SRL anchor features adjustable cradle for DuraTech® and most SRL brands up to 60'. Includes 2½" lag and sheet metal screws for wood and metal roof structures and steel deck installation. For temporary and reusable applications on flat and low-slope wood and steel roofing and decking.

7395C | Elevated Rotating SRL Anchor

Temporary



Pitched roof rotating SRL anchor features adjustable cradle for DuraTech® and most SRL brands up to 60'. Includes 16D nails and 2½" lag screws for temporary and reusable over-ridge installation on pitched wood roof trusses with sheathing.

7395E: With 5" wide Contractor SRL Cradle.

7465A | Window and Door Jamb



Specialty anchor is ideally suited for temporary use during construction in existing openings where doors or windows have not been installed. Built with light weight extruded aluminum featuring telescoping adjustable width for 21" to 51" openings and non-penetrating non-marring installation.

7495K | Rail Anchor Set




Rail anchor is designed for temporary and reusable installation onto existing train rail. Fits rail sizes from 112 lbs. to 141 lbs. (approx. 2 5/8" to 3") and includes 8248 Ironman® 12' Free Fall lanyard for foot-level tie-off while providing trailing mobility for the user.

7495A: Anchor only.



7460A | Parapet Anchor

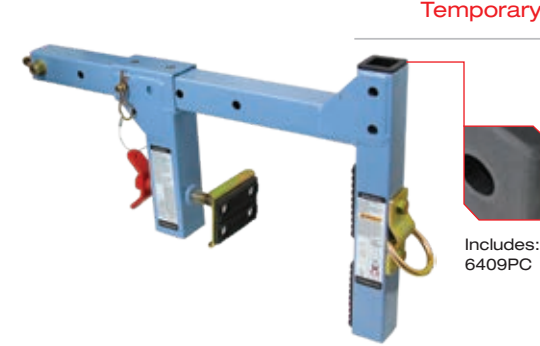

Parapet anchor features width adjustment range from 1/2" to 15" for parapets with 9" minimum height and includes protective rubber pads to reduce damage to parapet surface. Temporary and reusable non-penetrating installation. Includes 6409PC adapter sleeve for guardrail post.

74942 | Overhead Drop-through



2' Overhead Drop-through anchor features 1/4" vinyl coated galvanized steel cable with 1" swiveling connection eye and 6" x 6" steel plate that suspends cable through 1" min to 3" max hole diameter. For temporary and reusable installation through overhead holes in steel and concrete.

74946: 6' Drop-through anchor.
749485: 8 1/2' Drop-through anchor.

7336 | Pass-through Web Choker



3' pass-through web choker anchor with 1 3/4" load-bearing web and 3" wide wear pad for temporary reusable applications on properly rated structures. Large and medium size D-rings allow simple pass-through choke-on installation leaving smaller D-ring as connection point for lanyards or SRLs.

Additional lengths available up to 40'

Item #	Length
7324	2'
7348	4'
7372	6'
737208	8'
737210	10'
7373	12'

7236 | Cinch-loop Web Choker



3' cinch-loop web choker anchor features 1 3/4" heavy weight polyester web with connection D-ring for temporary reusable installation on properly rated structures. Familiar cinch-loop design provides easy choke-on attachment.

Item #	Length
7218	18'
7224	2'
722448	4'
7272	6'

7214 | Scaffold Choker



17" cinch-loop scaffold choker anchor features 1" polyester web with connection D-ring for temporary reusable choke-on installation to properly rated structures. Manageable length is ideal for short-reach applications common with scaffolds and towers.

7245 | WeldTech Cinch-loop Choker



3' WeldTech cinch-loop choker anchor features 1 3/4" Kevlar® web for resistance to spatter and slag burns commonly found in welding applications. Cinch-loop design provides temporary and reusable choke-on installation on properly rated structures.

7244: 6' length.

72493FT | Arc Flash Cinch-loop Choker



3' Arc Flash cinch-loop choker anchor features 1 3/4" Kevlar® web and overmold insulated D-ring for advanced Arc Flash hazard protection. Cinch-loop design provides temporary and reusable choke-on installation on properly rated structures.

72494FT: 4' length.
72496FT: 6' length.

BODY WEAR

When it comes to your fall protection equipment, there's nothing more personal, essential or important than your full body harness. While FallTech harnesses are built to meet or exceed ANSI standards and OSHA regulations, we've also designed comfort, support and accessibility into our body wear with continued freedom of movement, sustained safety and productivity for workers at height.

ADVANCED COMFORTECH® GEL



Exclusive Comfort-GEL endoskeleton, dorsal SRL attachment sleeve and aluminum camlock torso adjusters.

Forged aluminum D-rings, Visi-lock Quick Connect buckles and cool-vent lumbar zone

FLOWTECH® LTE



Proprietary FlowScape venting channels, dorsal SRL attachment sleeve and aluminum camlock torso adjusters.

Forged aluminum D-rings, moisture wicking mesh lining and twist-indicating 2-sided webbing.

JOURNEYMAN FLEX ALUMINUM



Unique ergonomic reinforced waist support and positioning pad, dorsal SRL attachment sleeve and aluminum camlock torso adjusters.

Forged aluminum D-rings, contoured hip-to-seat leg pads and Visi-lock Quick Connect buckles.

JOURNEYMAN FLEX STEEL



Preferred padding enhanced throughout shoulders and waist, dorsal SRL attachment sleeve and contoured hip-to-seat leg pads.

Traditional low-profile spring-tension torso adjusters, forged alloy steel D-rings and Visi-lock Quick Connect buckles.

TRADESMAN PLUS



Exclusive dorsal SRL attachment sleeve, tri-layer padded air-mesh shoulder yoke and Visi-lock Quick Connect chest buckles.

Traditional low-profile spring-tension torso adjusters, reinforced waist support and positioning pad and paired lanyard parking keepers.

TRADESMAN



Established features include forged alloy steel D-rings, friction roller torso adjusters, independent 10" shoulder pads and 9 adjustment position belt on Construction models.

CONTRACTOR PLUS



Exclusive dorsal SRL attachment sleeve, breathable padded air-mesh shoulder yoke and stabilized waist support positioning pad.

Mating Buckle chest closures, low-profile spring-tension torso adjusters and paired lanyard parking keepers.

CONTRACTOR



Established features include Mating Buckle torso adjusters, stamped steel D-rings, independent 7" shoulder pads and 9 adjustment position belt on Construction models.

AS DIVERSE AS
THE PEOPLE
WHO WEAR THEM

ADVANCED COMFORTECH® GEL

Proven end-user acceptance for unsurpassed comfort has made ComforTech® full body harnesses the preferred choice of body wear solutions they are today. A decade of growth later, the evolution of comfort continues with exclusive premium features and enhanced comfort provided with Advanced ComforTech® GEL.



FEATURES



1 Proprietary gel endoskeleton.



2 Exclusive aluminum camlock adjusters.



3 Dorsal SRL attachment sleeve.



4 Tool Tether connection rings.



5 Forged aluminum D-rings.



6 Integral Suspension Trauma Relief System (select models).

7081BR Construction Belted

ADVANCED COMFORTECH® GEL // BODY WEAR

7080B Standard Non-Belted

Single D-Ring

Sizes S to 3X



7080BFD Climbing Non-Belted

Two D-Rings

Sizes S to XL



7080B3D Standard Non-Belted

Three D-Rings

Sizes S to 2X



7080BR Standard Non-Belted

Single D-Ring

Sizes S to XL



Includes Suspension Trauma Relief System

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7080B	S, M, L, XL, 2X, 3X	Standard Non-Belted	Dorsal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest
7080BR	S, M, L, XL	Standard Non-Belted	Dorsal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest
7080B3D	S, M, L, XL, 2X	Standard Non-Belted	Dorsal, Hip	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7080BFD	S, M, L, XL	Climbing Non-Belted	Dorsal, Sternal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Climbing

7082B | Standard Non-Belted



Single D-ring
Sizes S to 3X

7082B3D | Standard Non-Belted



Three D-rings
Sizes S to XL

7082BFD | Climbing Non-Belted



Two D-rings
Sizes S to XL

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7082B	S, M, L XL, 2X, 3X	Standard Non-Belted	Dorsal	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest
7082B3D	S, M, L, XL	Standard Non-Belted	Dorsal, Hip	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7082BFD	S, M, L, XL	Climbing Non-Belted	Dorsal, Sternal	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Climbing

7081B | Construction Belted



Three D-rings
Sizes XS to 3X

7081BR | Construction Belted



Three D-rings
Includes Suspension Trauma Relief System
Sizes S to XL

7081BFD | Construction Climbing



Four D-rings
Sizes S to XL

7083B | Construction Belted



Three D-rings
Sizes S to 3X

7083BFD | Construction Climbing



Four D-rings
Sizes S to XL

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7081B	XS, S, M, L, XL, 2X, 3X	Construction Belted	Dorsal, Hip	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7081BR	S, M, L, XL	Construction Belted	Dorsal, Hip	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7081BFD	S, M, L, XL	Construction Climbing	Dorsal, Hip, Sternal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning, Climbing
7083B	S, M, L, XL, 2X, 3X	Construction Belted	Dorsal, Hip	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7083BFD	S, M, L, XL	Construction Climbing	Dorsal, Hip, Sternal	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning, Climbing

FLOWTECH® LTE

Lightweight breathability is the result of user demand embodied in FlowTech® LTE full body harnesses. Redesigned proprietary FlowScape® pad technology provides unrivaled performance in transferring body heat away from the user through advanced evaporative breathability. Coupled with aluminum hardware components throughout each harness, these are the essentials comprising the foundation of FlowTech® LTE.




FEATURES



Dorsal SRL attachment sleeve.



Proprietary Flowscape® air channel padding.



Exclusive aluminum camlock adjusters.



Tool Tether connection rings.



Triple-lock Quick Connect leg buckles (select models).

7089BQ Construction Belted

7086B | Standard Non-Belted

Single D-ring

Sizes S to XL



7086BFD | Climbing Non-Belted

Two D-rings

Sizes S to XL



7086BR | Standard Non-Belted

Single D-ring

Sizes S to XL



Includes Suspension Trauma Relief System

7093B | Standard Non-Belted

Three D-rings

Sizes S to 3X



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7086B	S, M, L, XL	Standard Non-Belted	Dorsal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest
7086BFD	S, M, L, XL	Climbing Non-Belted	Dorsal, Sternal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Climbing
7086BR	S, M, L, XL	Standard Non-Belted	Dorsal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest
7093B	S, M, L, XL, 2X, 3X	Standard Non-Belted	Dorsal, Hip	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning

7087B | Standard Non-Belted



Single D-ring
Sizes S to 3X

7087BFD | Climbing Non-Belted



Two D-rings
Sizes S to 2X

7087BQ | Standard Non-Belted



Single D-ring
Sizes S to XL



Includes triple-lock quick connect leg buckles

7092B | Standard Non-Belted



Three D-rings
Sizes S to XL

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7087B	S, M, L, XL, 2X, 3X	Standard Non-Belted	Dorsal	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest
7087BFD	S, M, L, XL, 2X	Climbing Non-Belted	Dorsal, Sternal	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Climbing
7087BQ	S, M, L, XL	Standard Non-Belted	Dorsal	Locking Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest
7092B	S, M, L, XL	Standard Non-Belted	Dorsal, Hip	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning

7088B | Construction Belted



Three D-rings
Sizes S to 3X

7088BFD | Construction Climbing



Four D-rings
Sizes S to XL

7088BR | Construction Belted



Three D-rings
Sizes S to XL



Includes Suspension Trauma Relief System

7099B | Construction Belted



Single D-ring
Sizes S to 2X

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7088B	S, M, L, XL, 2X, 3X	Construction Belted	Dorsal, Hip	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7088BFD	S, M, L, XL	Construction Climbing	Dorsal, Hip, Sternal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning, Climbing
7088BR	S, M, L, XL	Construction Belted	Dorsal, Hip	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7099B	S, M, L, XL, 2X	Construction Belted	Dorsal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest

7089B | Construction Belted

Three D-rings

Sizes S to 3X

**7089BFD** | Construction Climbing

Four D-rings

Sizes S to XL

**7089BQ** | Construction Belted

Three D-rings

Sizes S to XL



Includes triple-lock quick connect leg buckles

8099B | Construction Belted

Single D-ring

Sizes S to XL



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7089B	S, M, L, XL, 2X, 3X	Construction Belted	Dorsal, Hip	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7089BFD	S, M, L, XL	Construction Climbing	Dorsal, Hip, Sternal	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning, Climbing
7089BQ	S, M, L, XL	Construction Belted	Dorsal, Hip	Locking Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
8099B	S, M, L, XL	Construction Belted	Dorsal	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest



JOURNEYMAN FLEX ALUMINUM

Journeyman FLEX harnesses continue the enduring tradition as a workhorse solution in Fall Protection body wear. Now advanced and elevated with premium features, comfort and durability, Journeyman FLEX harnesses deliver unmatched reliability and value for every job and application end-users demand.



FEATURES



1 Dorsal SRL attachment sleeve.



2 Exclusive aluminum camlock adjusters.



3 Visi-lock Quick Connect leg and chest buckles.



4 Forged aluminum D-rings.



5 Reinforced ergonomic waist support pad.



6 Contoured hip-to-seat leg pads.

7035B Construction Belted Harness

7021B Standard Non-Belted

Single D-ring

Sizes UniFit to 2X



7021BFD Climbing Non-Belted

Two D-rings

Sizes S to 2X



7023B Standard Non-Belted

Three D-rings

Sizes UniFit to XL



7027B Retrieval Non-Belted

Three D-rings

Sizes UniFit to XL



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7021B	UniFit, XL, 2X	Standard Non-Belted	Dorsal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest
7021BFD	S, M, L, XL, 2X	Climbing Non-Belted	Dorsal, Sternal	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Climbing
7023B	UniFit, XL	Standard Non-Belted	Dorsal, Hip	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7027B	UniFit, XL	Retrieval Non-Belted	Dorsal, Shoulder	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Retrieval

UniFit (Small, Medium, Large)

7021BQC | Standard Non-Belted



Single D-ring

Sizes UniFit to 2X

7023BQC | Standard Non-Belted



Three D-rings

Sizes UniFit to XL

7029B | Crossover Climbing



Four D-rings

Sizes UniFit to XL

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7021BQC	UniFit, XL, 2X	Standard Non-Belted	Dorsal	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest
7023BQC	UniFit, XL	Standard Non-Belted	Dorsal, Hip	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7029B	UniFit, XL	Crossover Climbing	Dorsal, Hip, Sternal	Tongue Buckle	Mating Buckle	Aluminum Camlock	Fall Arrest, Work Positioning, Climbing

UniFit (Small, Medium, Large)

7035B | Construction Belted



Three D-rings

Sizes S to 3X

7035BQC | Construction Belted



Three D-rings

Sizes S to XL

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7035B	S, M, L, XL, 2X, 3X	Construction Belted	Dorsal, Hip	Tongue Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning
7035BQC	S, M, L, XL	Construction Belted	Dorsal, Hip	Quick Connect Buckle	Quick Connect Buckle	Aluminum Camlock	Fall Arrest, Work Positioning



7021 | Standard Non-Belted

Single D-ring
Sizes XS to 4X



7021FD | Climbing Non-Belted

Two D-rings
Sizes S to 3X



7021QC | Standard Non-Belted

Single D-ring
Sizes UniFit to 3X



7023 | Standard Non-Belted

Three D-rings
Sizes UniFit to 3X



7023QC | Standard Non-Belted

Three D-rings
Size UniFit



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7021	XS, UniFit, XL, 2X, 3X, 4X	Standard Non-Belted	Dorsal	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest
7021FD	S, M, L, XL, 2X, 3X	Climbing Non-Belted	Dorsal, Sternal	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Climbing
7021QC	UniFit, XL, Dual 2X/3X	Standard Non-Belted	Dorsal	Quick Connect Buckle	Quick Connect Buckle	Steel Spring Tension Roller	Fall Arrest
7023	UniFit, XL, 2X, 3X, 4X	Standard Non-Belted	Dorsal, Hip	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning
7023QC	UniFit	Standard Non-Belted	Dorsal, Hip	Quick Connect Buckle	Quick Connect Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning

UniFit (Small, Medium, Large) 2X/3X : Dual Size

7035 | Construction Belted

Three D-rings
Sizes XS to 4X



7035FD | Construction Climbing

Four D-rings
Sizes S to XL



7035QC | Construction Belted

Three D-rings
Sizes S to 4X



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7035	XS, S, M, L, XL, 2X, 3X, 4X	Construction Belted	Dorsal, Hip	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning
7035FD	S, M, L, XL	Construction Climbing	Dorsal, Hip, Sternal	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning, Climbing
7035QC	S, M, L, XL, 2X, 3X/4X	Construction Belted	Dorsal, Hip	Quick Connect Buckle	Quick Connect Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning

3X/4X : Dual Size

7027 | Retrieval Non-Belted

Three D-rings

Sizes UniFit to 3X

7028 | Crossover Climbing

Two D-rings

Sizes UniFit to 2X

7029 | Crossover Climbing

Four D-rings

Sizes XS to 3X

7034 | Construction Retrieval

Five D-rings

Sizes S to 3X

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7027	UniFit, XL, 2X, 3X	Retrieval Non-Belted	Dorsal, Shoulder	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Retrieval
7028	UniFit, X/2X	Crossover Climbing	Dorsal, Sternal	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Climbing
7029	XS, UniFit, XL, 2X, 3X	Crossover Climbing	Dorsal, Hip, Sternal	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning, Climbing
7034	S, M, L, XL, 2X, 3X	Construction Retrieval	Dorsal, Hip, Shoulder	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning, Climbing

UniFit (Small, Medium, Large) X/2X: Dual Size



TRADESMAN PLUS


Tradesman Plus harness enhancements incorporate nearly 20 years of end-user acceptance, productivity and manufacturing proficiency as the standard of day-in day-out performance and reliability. Serviceable functionality and trusted quality are built upon with added user benefits to last all day and every day without imposing a premium expense.



FEATURES



1 Dorsal SRL attachment sleeve.




2 Visi-lock Quick-Connect chest buckles.



3 Tri-layer padded shoulder yoke.



4 Reinforced comfort waist support pad.



5 Low-profile spring-tension adjusters.

7078B Construction Belted

7006B Standard Non-Belted

Single D-ring
Sizes UniFit to 2X



7008B Standard Non-Belted

Single D-ring
Sizes UniFit to 3X



7009B Standard Non-Belted

Three D-rings
Sizes UniFit to 2X



7010B Standard Non-Belted

Three D-rings
Sizes UniFit to 2X



7078B Construction Belted

Three D-rings
Sizes S to 2X



7079B Construction Belted

Single D-ring
Sizes S to 2X



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7006B	UniFit, X/2X	Standard Non-Belted	Dorsal	Mating Buckle	Quick Connect Buckle	Steel Spring Tension Roller	Fall Arrest
7008B	XS, UniFit, X/2X, 3X	Standard Non-Belted	Dorsal	Tongue Buckle	Quick Connect Buckle	Steel Spring Tension Roller	Fall Arrest
7009B	UniFit, X/2X	Standard Non-Belted	Dorsal, Hip	Mating Buckle	Quick Connect Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning
7010B	UniFit, X/2X	Standard Non-Belted	Dorsal, Hip	Tongue Buckle	Quick Connect Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning
7078B	S/M, L/X, 2X	Construction Belted	Dorsal, Hip	Tongue Buckle	Quick Connect Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning
7079B	S/M, L/X, 2X	Construction Belted	Dorsal	Tongue Buckle	Quick Connect Buckle	Steel Spring Tension Roller	Fall Arrest

UniFit (Small, Medium, Large) S/M, L/X and X/2X: Dual Sizes

7006 | Standard Non-Belted

Single D-ring

Sizes UniFit to 2X



7008 | Standard Non-Belted

Single D-ring

Sizes UniFit to 3X



7009 | Standard Non-Belted

Three D-rings

Sizes UniFit to 2X



7010 | Standard Non-Belted

Three D-rings


Sizes UniFit to 2X



7078 | Construction Belted

Three D-rings

Sizes S to 2X

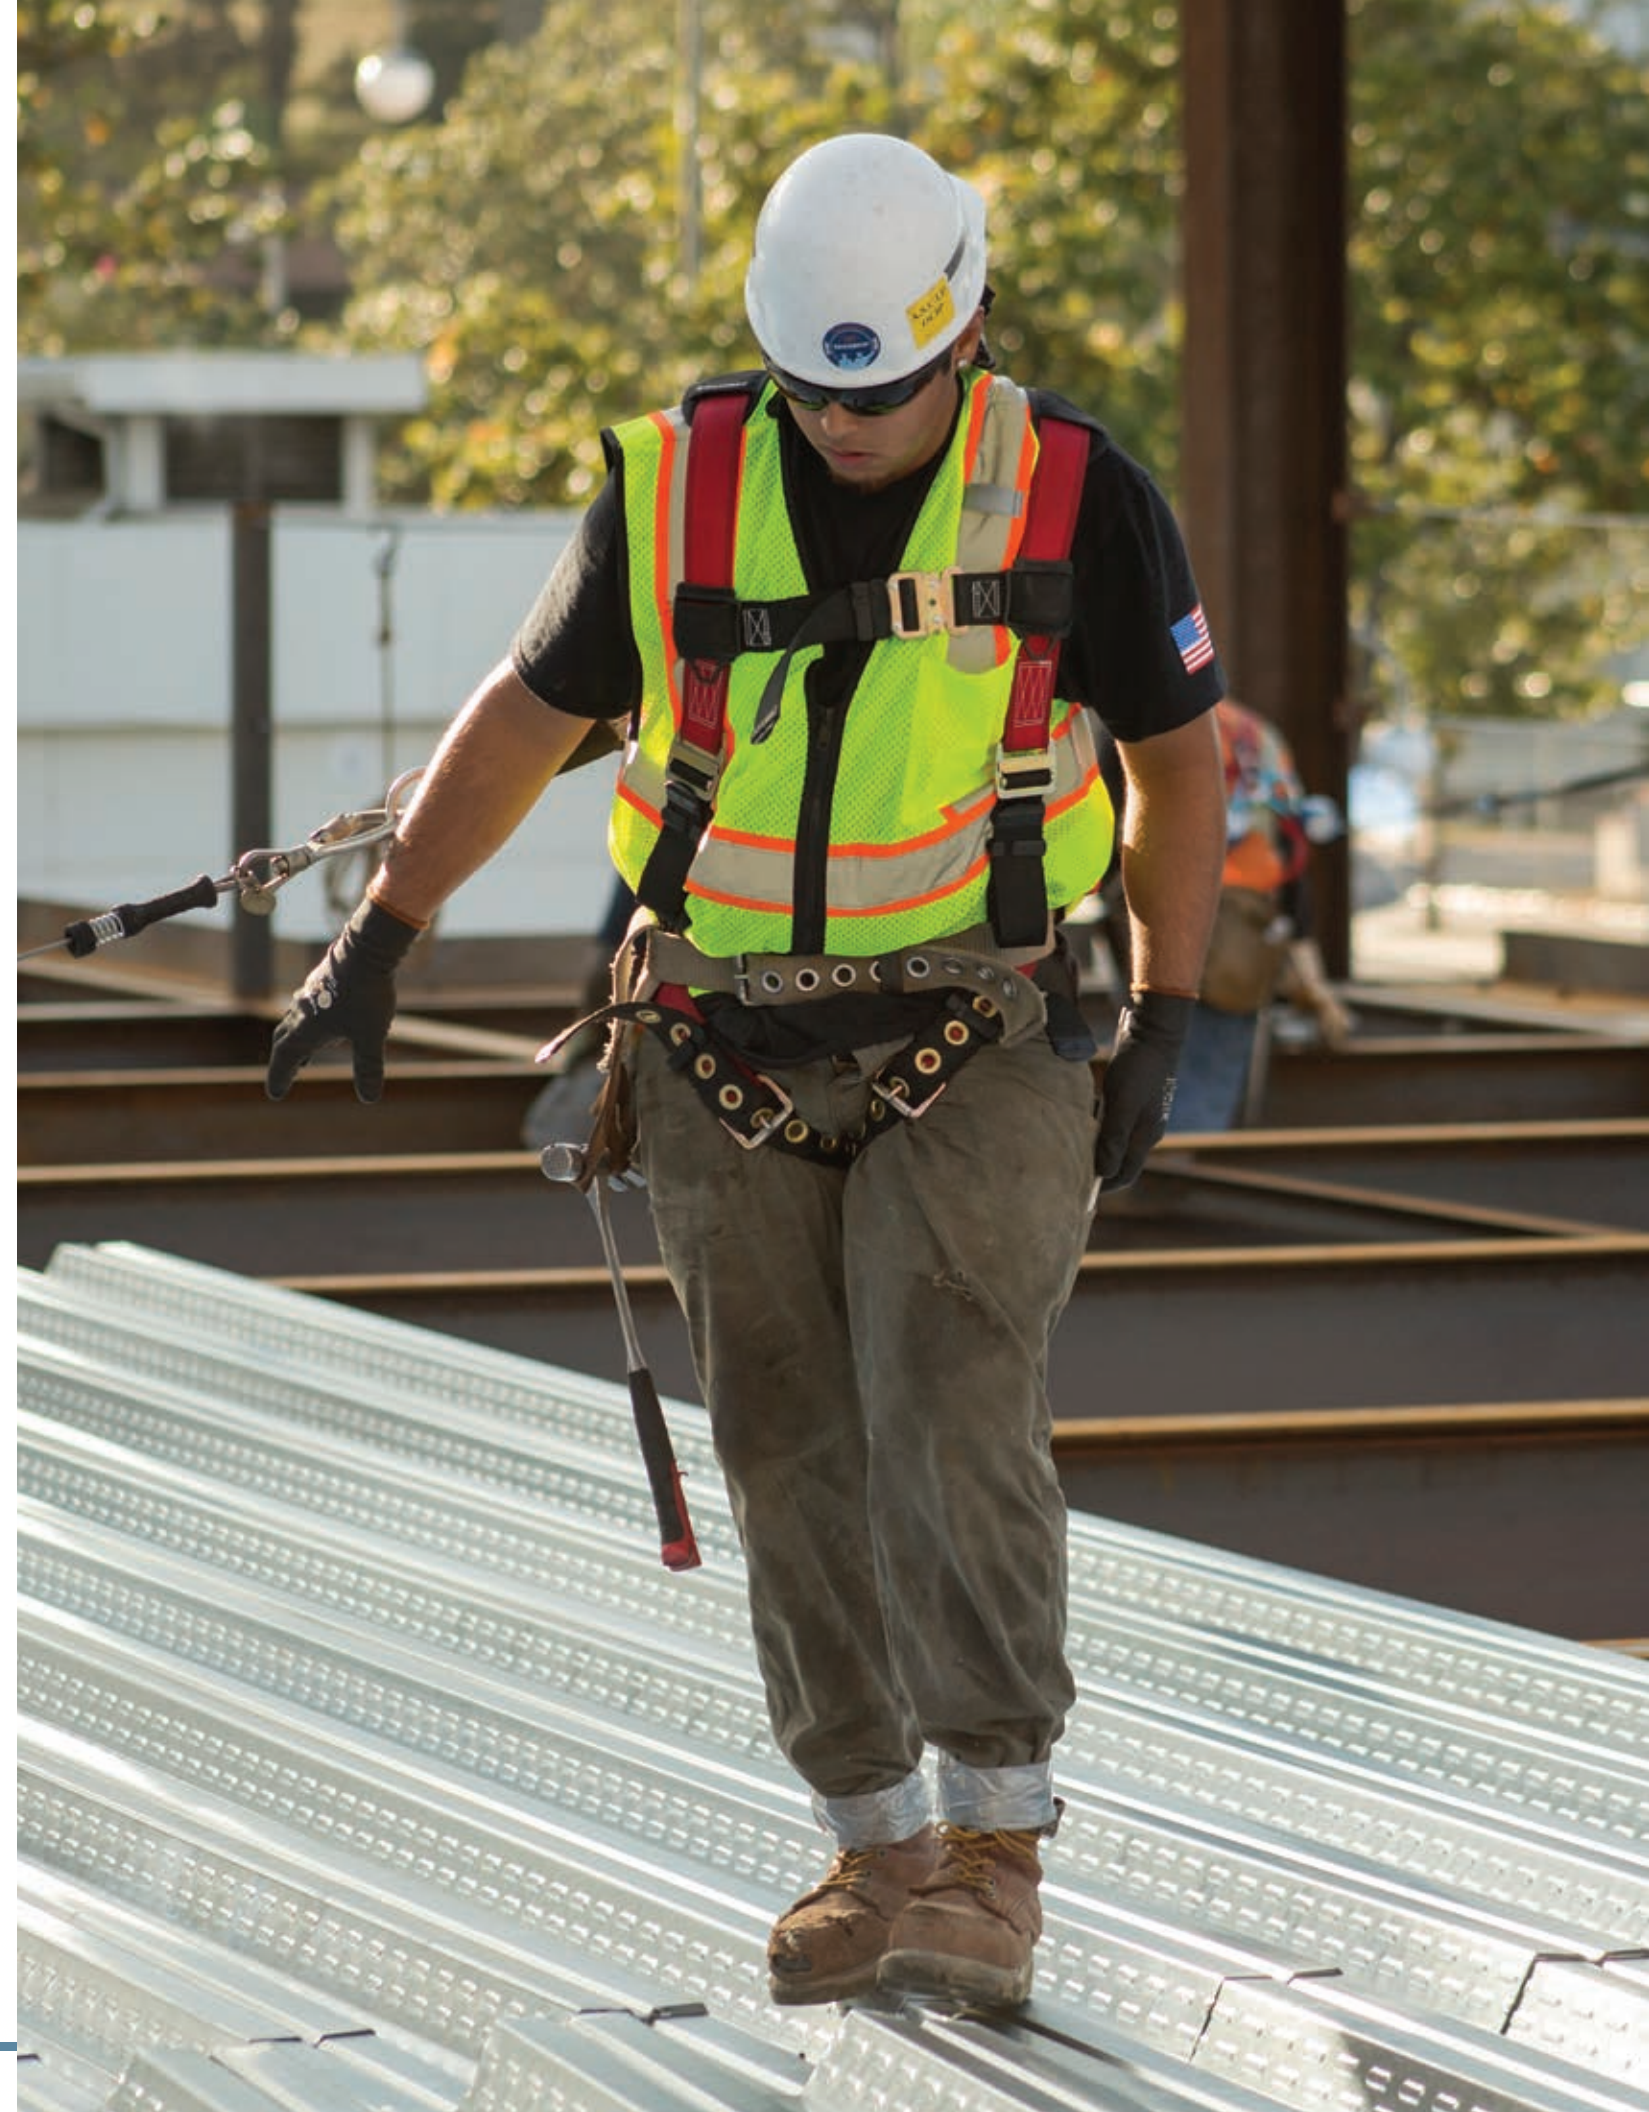

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7006	UniFit, XL, 2X	Standard Non-Belted	Dorsal	Mating Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest
7008	XS, UniFit, XL, 2X, 3X	Standard Non-Belted	Dorsal	Tongue Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest
7009	UniFit, XL, 2X	Standard Non-Belted	Dorsal, Hip	Mating Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest, Work Positioning
7010	UniFit, XL, 2X	Standard Non-Belted	Dorsal, Hip	Tongue Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest, Work Positioning
7078	S/M, L/X, 2X	Construction Belted	Dorsal, Hip	Tongue Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest, Work Positioning


UniFit (Small, Medium, Large) S/M and L/X: Dual Sizes

CONTRACTOR PLUS

Providing reliable performance and safety with economical function has been the mainstay of Contractor series harnesses since 2005. Our upgraded Contractor Plus harnesses also deliver this same compliance-grade foundation with practical and effective advances for improved user productivity in most all common worksite applications.



FEATURES



1 Dorsal SRL attachment sleeve.



2 Breathable comfort shoulder yoke.



3 Reinforced comfort waist support pad.



4 Low-profile spring-tension adjusters.

7073B Construction Belted

7015B Standard Non-Belted



7016B Standard Non-Belted



7017B Standard Non-Belted



7018B Standard Non-Belted



7073B Construction Belted



7074B Construction Belted



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7015B	UniFit, X/2X	Standard Non-Belted	Dorsal	Mating Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest
7016B	UniFit, X/2X	Standard Non-Belted	Dorsal	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest
7017B	UniFit, X/2X	Standard Non-Belted	Dorsal, Hip	Mating Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning
7018B	UniFit, X/2X	Standard Non-Belted	Dorsal, Hip	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning
7073B	S/M, L/X, 2X	Construction Belted	Dorsal, Hip	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest, Work Positioning
7074B	S/M, L/X, 2X	Construction Belted	Dorsal	Tongue Buckle	Mating Buckle	Steel Spring Tension Roller	Fall Arrest

UniFit (Small, Medium, Large) S/M, L/X and X/2X: Dual Size

7015 | Standard Non-Belted

Single D-ring
Sizes XS to 3X



7016 | Standard Non-Belted

Single D-ring
Sizes XS to 3X



7017 | Standard Non-Belted

Three D-rings
Sizes UniFit to 3X



7018 | Standard Non-Belted

Three D-rings
Sizes XS to 3X



7073 | Construction Belted

Three D-rings
Sizes S to 3X



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7015	XS, UniFit, X/2X, 3X	Standard Non-Belted	Dorsal	Mating Buckle	Mating Buckle	Mating Buckle	Fall Arrest
7016	XS, UniFit, X/2X, 3X	Standard Non-Belted	Dorsal	Tongue Buckle	Mating Buckle	Mating Buckle	Fall Arrest
7017	UniFit, XL, 2X, 3X	Standard Non-Belted	Dorsal, Hip	Mating Buckle	Mating Buckle	Mating Buckle	Fall Arrest Work Positioning
7018	XS, UniFit, X/2X, 3X	Standard Non-Belted	Dorsal, Hip	Tongue Buckle	Mating Buckle	Mating Buckle	Fall Arrest Work Positioning
7073	S/M, L/X, 2X, 3X	Construction Belted	Dorsal, Hip	Tongue Buckle	Mating Buckle	Mating Buckle	Fall Arrest Work Positioning

UniFit (Small, Medium, Large) S/M, L/X and X/2X: Dual Sizes

7007 | Standard Non-Belted

Single D-ring
Sizes UniFit to 3X



7019A | Crossover Climbing

Two D-rings
Sizes UniFit to 2X



7019B | Crossover Climbing

Four D-rings
Sizes UniFit to 2X



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7007	UniFit, XL, 2X, 3X	Standard Non-Belted	Dorsal	Mating Buckle	Mating Buckle	N/A	Fall Arrest
7019A	UniFit, X/2X	Crossover Climbing	Dorsal, Sternal	Mating Buckle	Mating Buckle	Mating Buckle	Fall Arrest
7019B	UniFit, X/2X	Crossover Climbing	Dorsal, Hip, Sternal	Mating Buckle	Mating Buckle	Mating Buckle	Fall Arrest, Work Positioning, Climbing

UniFit (Small, Medium, Large) X/2X: Dual Size



SPECIALTY BODY WEAR

In addition to our full compliment of multi-function harnesses structured to meet traditional fall arrest, work positioning and climbing applications, our expanded range of specialty harnesses address task and environment specific applications for welding, tower climbing, utilities, oil and gas and traffic.

ARC FLASH



Overmold insulated D-rings, Mating and Quick Connect buckles and traditional leather insulators.

Solutions provided with Nomex or Nylon webbing, with and without flame resistant shoulder, waist and leg pads and dorsal D-ring or loop options.

WELDTECH



Standard Non-belted and Crossover Climbing models available with Nomex webbing and one to four alloy steel D-rings.

Offered with Visi-lock Quick Connect or Mating Buckle chest and leg closures and grommeted Kevlar legs with Tongue Buckles.

HIGH-VIZ VEST



Class 2 and Construction Grade safety vest options feature vest-cut design for improved access to user's pants pockets and are both available in high-vis Lime and Orange breathable mesh fabric.

Class 2 vests are paired with 3-D harnesses with Tongue Buckle legs and feature zippered side vents for access to Hip D-rings and include zippered front and rear pockets.

Construction Grade vests are paired with 1-D harnesses with Mating Buckle legs and include four front pockets.

ROUGHNECK®



Harness configurations provide solutions for Fall Arrest, Work Positioning, Climbing, Restraint, Riding/Lifting and Suspension applications common in derrick work.

Available in Bosun Belted, Crossover Climbing, Derrick Construction and Derrick Non-belted models.

Recognized features include integral Seat Board or Sling Seat for suspension, Dorsal D-ring extensions, Hip-lifting D-rings, Restraint D-rings and attachment buckles for Belly Belts.

TOWER CLIMBER®



User-preferred configurations with six D-rings for Fall Arrest, Work Positioning, Climbing and Suspension applications common in most all tower climbing work.

ComforTech® and FlowTech® climbers feature padded, adjustable and detachable suspension seats reinforced with internal aluminum support bars and Visi-lock Quick Connect chest buckles

ComforTech® climbers include steel D-rings and Tongue Buckle legs while FlowTech® climbers feature aluminum D-rings and Quick Connect legs.

POSITIONING AND WORK BELTS




Designed for Work Positioning and Fall Restraint applications and, for providing added lumbar support as a separate component of a Personal Fall Arrest or Work Positioning System. Available for integration with most full body harnesses.

Work Belts are ideally suited for replacement on Construction Belted harnesses, adding functionality to non-belted harnesses and for stand-alone use to support heavy tool bags.

ARC FLASH

FallTech Arc Flash harness protect workers in a fall event following electric arc flash and arc blast exposure when working at heights or in confined spaces near electrically charged sources. Available in user-preferred flame-resistant Nomex webbing, with and without comfort pads, and options featuring premium overmold hardware and traditional leather insulation. ASTM F887-13 and ANSI Z359.11-2014 compliant.

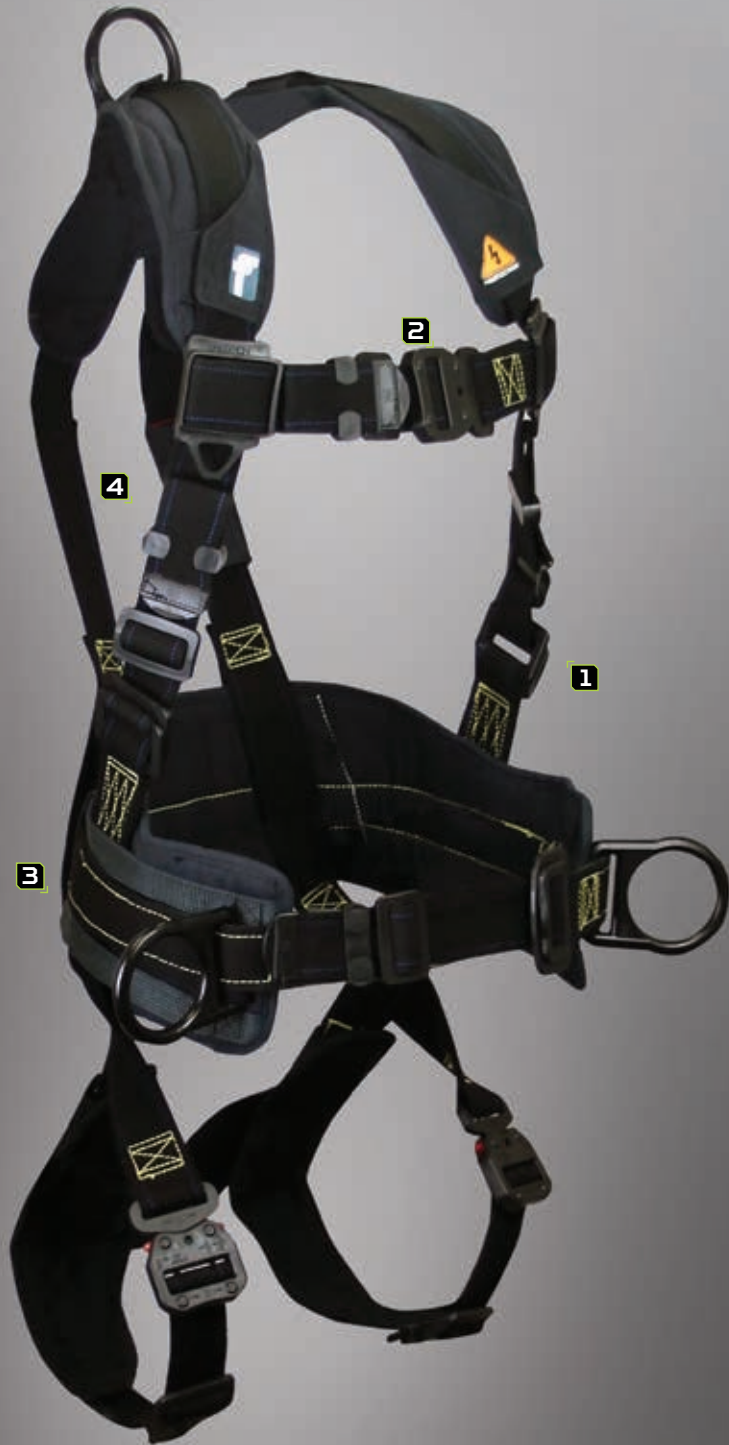

FEATURES



1 Premium overmold insulation on steel hardware.



2 Overmold Visi-lock Quick Connect buckles (select models).



3 Nomex® and Kevlar® flame resistant comfort pads.



4 Nomex®/Kevlar® blended webbing throughout torso, legs and belt.

8073QC Construction Belted


7047 Standard Non-Belted



7047QC Standard Non-Belted



8060B Crossover Climbing

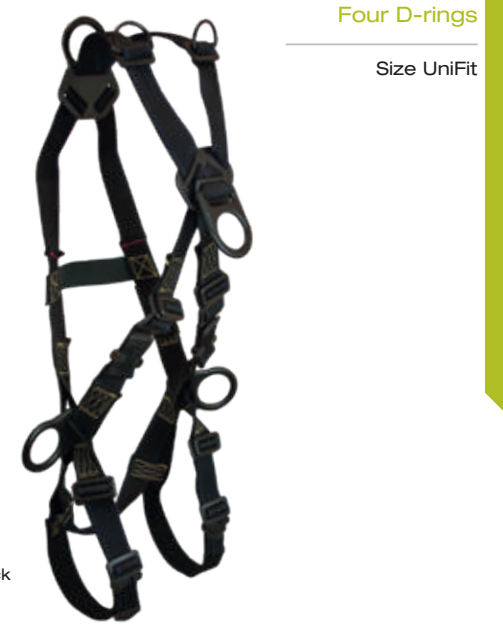

8076 Standard Non-Belted



8076B Standard Non-Belted



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7047	UniFit, XL, 2X	Standard Non-Belted	Dorsal	Overmold Quick Connect Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest
7047QC	S, M, L, XL	Standard Non-Belted	Dorsal	Overmold Quick Connect Buckle	Overmold Quick Connect Buckle	Overmold Mating Buckle	Fall Arrest
8060B	UniFit	Crossover Climbing	Dorsal, Hip, Sternal	Overmold Mating Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning, Climbing
8076	UniFit, XL	Standard Non-Belted	Dorsal	Leather Insulated Quick Connect Buckle	Leather Insulated Quick Connect Buckle	Overmold Mating Buckle	Fall Arrest
8076B	UniFit, XL, 2X	Standard Non-Belted	Dorsal, Hip	Leather Insulated Quick Connect Buckle	Leather Insulated Quick Connect Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning

UniFit (Small, Medium, Large)

7047R | Standard Non-Belted with Rescue

Single D-ring

Sizes S to 3X



7047FD | Climbing Non-Belted

Two D-rings

Sizes S to XL



7047BFD | Climbing Non-Belted

Four D-rings

Sizes S to XL



8076R | Standard Non-Belted with Rescue

Single D-ring

Sizes S to 3X



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7047R*	S, M, L, XL, 2X, 3X	Standard Non-Belted	Dorsal	Overmold Mating Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest, Rescue
7047RL*	S, M, L, XL, 2X, 3X	Standard Non-Belted	Dorsal Loop	Overmold Mating Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest, Rescue
7047FD	S, M, L, XL	Climbing Non-Belted	Dorsal, Sternal	Overmold Mating Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest, Climbing
7047BFD	S, M, L, XL	Climbing Non-Belted	Dorsal, Hip, Sternal	Overmold Mating Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning, Climbing
8076R*	S, M, L, XL, 2X, 3X	Standard Non-Belted	Dorsal	Leather Insulated Quick Connect Buckle	Leather Insulated Quick Connect Buckle	Overmold Mating Buckle	Fall Arrest, Rescue

*7047R, 7047RL, and 8076R include Rescue Loops

8073 | Construction Belted

Three D-rings

Sizes S to XL



8073QC | Construction Belted

Three D-rings

Sizes S to XL



Overmold Visi-lock Quick Connect Buckle

8073FD | Construction Climbing

Four D-rings

Sizes S to XL



8070R | Construction Belted with Rescue

Three D-rings

Sizes S to XL



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
8073	S, M, L, XL	Construction Belted	Dorsal, Hip	Overmold Mating Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning
8073QC	S, M, L, XL	Construction Belted	Dorsal, Hip	Overmold Quick Connect Buckle	Overmold Quick Connect Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning
8073FD	S, M, L, XL	Construction Climbing	Dorsal, Hip, Sternal	Overmold Mating Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning, Climbing
8070R*	S, M, L, XL	Construction Belted	Dorsal, Hip	Leather Insulated Quick Connect Buckle	Leather Insulated Quick Connect Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning, Rescue
8070	S, M, L, XL	Construction Belted	Dorsal, Hip	Leather Insulated Quick Connect Buckle	Leather Insulated Quick Connect Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning, Rescue
8073R*	S, M, L, XL, 2X	Construction Belted	Dorsal, Hip	Overmold Mating Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning, Rescue
8073RFD*	S, M, L, XL	Construction Climbing	Dorsal, Hip, Sternal	Overmold Mating Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning, Climbing

(Not Pictured: 8070, 8073R, 8073RFD) *8073R, *8070R and *8073RFD include Rescue Loops.

7051 | Standard Non-Belted

Single D-loop

Sizes XS to 2X



8063B | Crossover Climbing

Four D-rings

Size UniFit



8087 | Standard Non-Belted

Single D-loop

Size UniFit



Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7051	XS, UniFit, XL, 2X	Standard Non-Belted	Dorsal Loop	Leather Insulated Mating Buckle	Leather Insulated Mating Buckle	Leather Insulated Mating Buckle	Fall Arrest
8063B	UniFit	Crossover Climbing	Dorsal, Hip, Sternal	Overmold Mating Buckle	Overmold Mating Buckle	Overmold Mating Buckle	Fall Arrest, Work Positioning Climbing
8087	UniFit	Standard Non-Belted	Dorsal Loop	Leather Insulated Quick Connect Buckle	Leather Insulated Quick Connect Buckle	Leather Insulated Mating Buckle	Fall Arrest

UniFit (Small, Medium, Large)



7036A | Standard Non-Belted

Single D-ring

Size UniFit



7037 | Standard Non-Belted

Single D-ring

Sizes UniFit to 3X



7039 | Standard Non-Belted

Three D-rings

Sizes UniFit to 2X



7052B | Crossover Climbing

Four D-rings

Size UniFit



5075A | Slag Shield Cover

Harness

Sizes S to XL



5075C | Slag Shield Cover

Lanyards



Slag Shields cover harness and lanyard webbing to protect against welding slag and spatter. 5075A fits small and medium harnesses, 5075B fits large and XL harnesses

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7036A	UniFit	Standard Non-Belted	Dorsal	Tongue Buckle	Quick Connect Buckle	Steel Friction Roller	Fall Arrest
7037	UniFit, XL, 2X, 3X	Standard Non-Belted	Dorsal	Mating Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest
7039	UniFit, XL, 2X	Standard Non-Belted	Dorsal, Hip	Quick Connect Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest, Work Positioning
7052B	UniFit	Crossover Climbing	Dorsal, Hip, Sternal	Mating Buckle	Mating Buckle	Mating Buckle	Fall Arrest, Climbing, Rescue
5075A	Small/Med	Harness Cover	-	-	-	-	Harnesses
5075B	Large/XL	Harness Cover	-	-	-	-	Harnesses
5075C	Fits 6' Lanyards	Lanyard Cover	-	-	-	-	Lanyards

UniFit (Small, Medium, Large)

7015L | Construction Grade




Single D-ring
Sizes S to 3X

7018L | Class 2 Non-Belted



Three D-rings
Sizes S to 3X

5050 | Premium Class 2

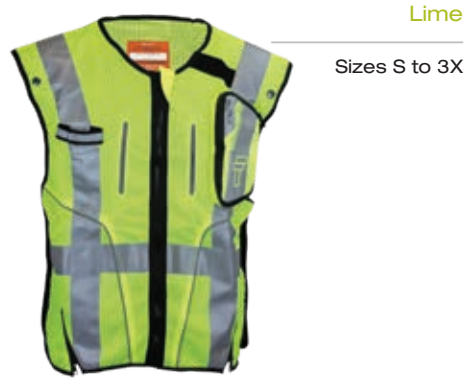

Lime
Sizes S to 3X

5051: Construction Grade Lime also available.

7015O | Construction Grade



Single D-ring
Sizes S to 3X

7018O | Class 2 Non-Belted



Three D-rings
Sizes S to 3X

5055 | Premium Class 2



Orange
Sizes S to 3X

5056: Construction Grade Orange also available.

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7015L	S/M, L/X 2X/3X	Construction Grade Non-Belted	Dorsal	Mating Buckle	Mating Buckle	Mating Buckle	Fall Arrest
7018L	S/M, L/X 2X/3X	Class 2 Non-Belted	Dorsal, Hip	Tongue Buckle	Mating Buckle	Mating Buckle	Fall Arrest, Work Positioning
7015O	S/M, L/X 2X/3X	Construction Grade Non-Belted	Dorsal	Mating Buckle	Mating Buckle	Mating Buckle	Fall Arrest
7018O	S/M, L/X 2X/3X	Class 2 Non-Belted	Dorsal, Hip	Tongue Buckle	Mating Buckle	Mating Buckle	Fall Arrest, Work Positioning
5050	S/M, L/X 2X/3X	Premium Class 2 Vest	-	-	-	-	-
5055	S/M, L/X 2X/3X	Premium Class 2 Vest	-	-	-	-	-

S/M, L/X and 2X/3X: Dual Size

8001B | Derrick Bosun Belted



Seven D-rings
Sizes S to XL

8006 | Derrick Non-Belted



Three D-rings
Sizes S to XL

- Uses 8035 Belly Belt (sold separately)


8007 | Derrick Non-Belted



Four D-rings
Sizes S to XL

- Uses 8035 Belly Belt (sold separately)

8026 | Derrick Crossover Belted

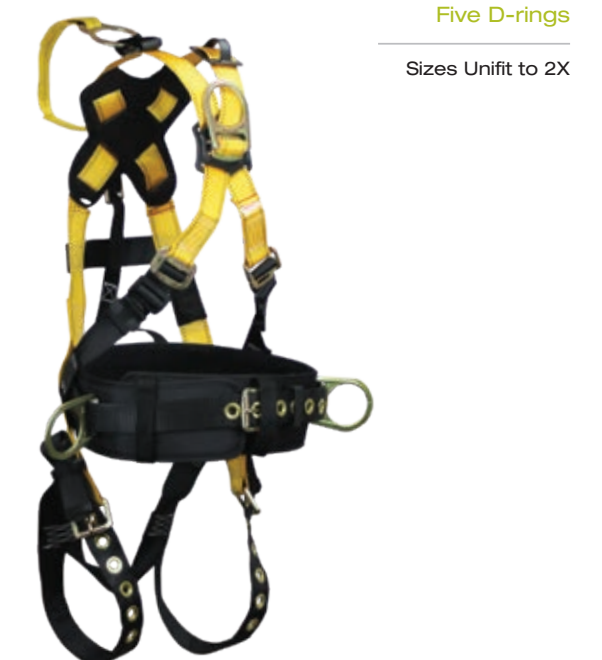

Five D-rings
Sizes Unifit to 2X

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
8001B	S, M, L, XL	Derrick Bosun Belted	Dorsal, Dorsal Extension, Hip, Sternal, Saddle Seat	Tongue Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest, Work Positioning, Climbing, Suspension
8006	S, M, L, XL	Derrick Non-Belted	Dorsal, Hip Lifting	Tongue Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest, Riding and Lifting
8007	S, M, L, XL	Derrick Non-Belted	Dorsal, Dorsal Extension, Hip Lifting	Tongue Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest, Riding and Lifting
8026	UniFit, X/2X	Derrick Crossover Belted	Dorsal, Dorsal Extension, Hip, Sternal, Waist/Rear	Tongue Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest, Work Positioning, Climbing, Restraint

UniFit (Small, Medium, Large) X/2X: Dual Size

8021 | Derrick Bosun Belted



Four D-rings
 Sizes S to XL

- Uses 8031 Belly Belt (sold separately)

8021FN | Derrick Belted



Four D-rings
 Sizes S to 3X

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
8021	S, M, L, XL	Derrick Bosun Belted	Dorsal Extension, Saddle Seat, Waist/Rear	Tongue Buckle	Mating Buckle	Steel Friction Roller	Fall Arrest, Suspension, Restraint
8021FN	S, M, L, XL, 2X, 3X	Derrick Belted	Dorsal, Dorsal Extension, Sternal, Waist/Rear Extension	Tongue Buckle	Quick Connect Buckle	Steel Spring Tension Roller	Fall Arrest, Climbing, Restraint



8031 | Belly Belt



Sizes S to XL

Includes D-rings for pipe positioning (not rated) and paired straps with mating buckles for attachment to 8021 Derrick harness.

8039 | Premium Bosun Seat



Suspension
 Sizes S to XL

Bosun Seat features molded EVA seat pad, Birch plywood seat board, paired suspension D-rings, heavy-duty belt with back pad and 2 steel clips for tool bags. Seat board measures 23" x 11" x 7/8".

8035 | Belly Belt



Sizes S to XL

Includes D-rings for pipe positioning (not rated) and paired mating buckles for attachment to 8006 and 8007 Derrick harnesses.

8042 | Standard Bosun Seat



Suspension

Bosun Seat features Birch plywood seat board and paired suspension D-rings. Seat board measures 23" x 11" x 7/8".

Item #	Sizes	D-rings	Attachment	Harness	Belt
8031	S, M, L, XL	Plated Alloy Steel	Upper Torso Mating Buckle	8021	Tongue Buckle
8035	S, M, L, XL	Plated Alloy Steel	Lower Torso Mating Buckle	8006, 8007	Tongue Buckle

Item #	Seat Board	D-rings	Belt Size	Cushion	Tool clips
8039	Birch Plywood	Plated Alloy Steel	S, M, L, XL	3/8" Thick	Plated Steel
8042	Birch Plywood	Plated Alloy Steel	-	-	-

7042 | Journeyman Tower



Six D-rings

Sizes S to XL

7084 | ComforTech® Tower



Six D-rings

Sizes S to XL

8092A | FlowTech® Tower



Six D-rings

Sizes S to XL

Item #	Sizes	Type	D-rings	Legs	Chest	Torso	Applications
7042	S, M, L, XL	Journeyman	Dorsal, Hip, Sternal, Saddle Seat	Tongue Buckle	Quick Connect Buckle	Steel Friction Roller	Fall Arrest, Work Positioning, Climbing, Suspension
7084*	S, M, L, XL	ComforTech®	Dorsal, Hip, Sternal, Saddle Seat	Tongue Buckle	Quick Connect Buckle	Steel Friction Roller	Fall Arrest, Work Positioning, Climbing, Suspension
8092A*	S, M, L, XL	FlowTech®	Dorsal, Hip, Sternal, Saddle Seat	Quick Connect Buckle	Quick Connect Buckle	Aluminum Spring Tension Roller	Fall Arrest, Work Positioning, Climbing, Suspension

*7084 and 8092A feature removable seats

FallTech® Body Belts are designed for use in Work Positioning and Restraint applications and for integration with most full body harnesses. Available in two styles with Hip D-rings for positioning and with a single Waist D-ring for restraint. A variety of waist support pads and removable or fixed belt options are available for frequent and occasional use.

7055 | Standard Positioning



Two D-rings

Sizes S to 2X

Features 4" bonded waist support pad with heavy duty removable work belt.

7055B | Premium Positioning



Two D-rings

Sizes S to 2X

Features 6" molded waist support pad with heavy duty removable work belt.

7056 | Premium Positioning



Two D-rings

Sizes S to XL

Features 4" bonded waist pad with 3" web support band and heavy duty removable work belt.

7060 | Web Positioning



Two D-rings

Sizes S to XL

Features 3" waist support web with heavy duty fixed work belt.

7090 | Restraint Belt



Single D-ring

Sizes S to 3X

Features 4" bonded waist support pad with heavy duty fixed work belt.

7094 | Work Belt



Aluminum

Sizes XS to 4X

Features aluminum buckle with 7 adjustment positions.

7095 | Work Belt



Steel

Sizes XS to 4X

Features plated steel buckle with 7 adjustment positions.

7004Y | Shoulder Yoke



UniFit size fits most harnesses
7004YAF: Shoulder Yoke for Arc Flash
5001: Memory-foam Shoulder Yoke.

5003 | Leg Pads



Memory-foam fits most harnesses
5003AF: Arc Flash Sub-pelvic Leg Pads.

5040 | Suspension Trauma Relief



Adjustable length step-in loop assembly will accommodate both user's feet to relieve pressure. UniFit design fits most harnesses with choke-on/snap fastener installation. Features integral thumb loops for quick deployment after a fall event.

7004L | Shoulder Pads



Independent pads fit most harnesses
7004: 7½" Shoulder Pads.

5066 | Lanyard Keepers




2/pk UniFit size fit most harnesses.



QUICK REFERENCE GUIDE

Please refer to this chart to get a general idea of your FallTech harness size.

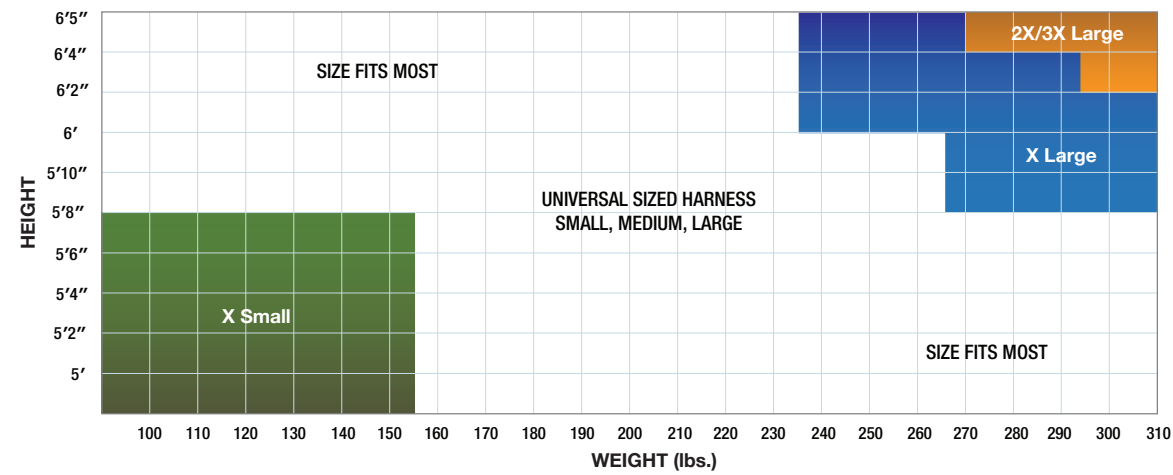

DETAILED REFERENCE GUIDE

Because your harness is the most important element of any personal fall arrest system, it must fit properly to deliver the highest level of safety. After you select your FallTech harness, follow these three simple steps to find your exact size.

1. TORSO STRAP

Single-size Harness

XS	32" - 49"	TB	16" - 28"
		MB/QC	14" - 30"
S	38" - 51"	TB	18" - 30"
		MB/QC	16" - 32"
M	40" - 53"	TB	20" - 32"
		MB/QC	18" - 34"
L	42" - 55"	TB	22" - 34"
		MB/QC	20" - 36"
XL	46" - 57"	TB	24" - 36"
		MB/QC	22" - 38"
2X	48" - 60"	TB	26" - 38"
		MB/QC	24" - 40"
3X	51" - 62"	TB	28" - 40"
		MB/QC	26" - 42"
4X	50" - 64"	TB	30" - 42"
		MB/QC	28" - 44"

UniFit Harness

UNI	47" - 60"	TB	19" - 31"
		MB/QC	17" - 33"

Dual-size Harness

S/M	43" - 53"	TB	18" - 30"
		MB/QC	16" - 32"
L/XL	45" - 58"	TB	22" - 34"
		MB/QC	20" - 36"
XL/2X	49" - 68"	TB	24" - 36"
		MB/QC	22" - 38"
2X/3X	51" - 63"	TB	26" - 38"
		MB/QC	24" - 40"
3X/4X	52" - 64"	TB	28" - 40"
		MB/QC	26" - 42"

TB= Tongue Buckle MB= Mating Buckle QC= Quick Connect Buckle

2. LEG STRAP

7 Grommet Single-size

XS	30" - 39"
S	34" - 43"
M	38" - 47"
L	42" - 51"
XL	46" - 55"
2X	50" - 59"
3X	54" - 63"
4X	58" - 67"


9 Grommet Dual-size

S/M	34" - 47"
L/XL	42" - 55"
XL/2X	46" - 59"
2X/3X	50" - 66"
3X/4X	54" - 70"

ALL MEASUREMENTS ARE TO BE TAKEN OVER CLOTHING

1. TORSO STRAP

Measure from 3 inches left of navel. Upward over left shoulder towards lower right side of back.

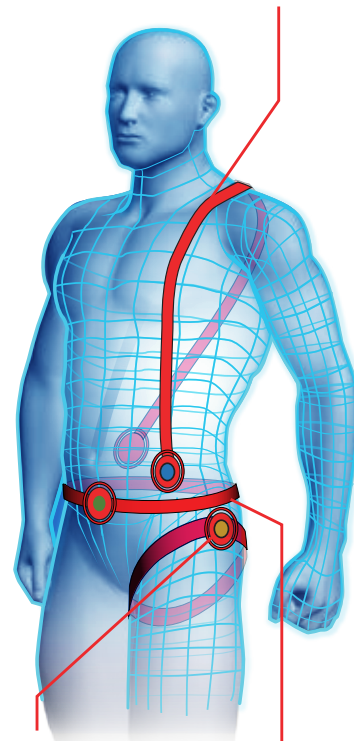

2. LEG STRAP

Measure the circumference around the thigh from the crotch to underneath the hip bone.

3. WAIST BELTS

Measure the circumference around the waist just under the navel.



CONNECTORS

FallTech's wide range of connectors for fall arrest, work positioning and restraint applications is built on years of dependable construction, performance and quality through rigorous testing and by directly addressing the needs of the end-user. From ElasTech® to Ironman® for rebar and rope positioning plus lifelines, extenders and carabiners, when you need to be connected, you have the right equipment for the job.

Energy Absorbing Lanyards



ViewPack®



ElasTech®



Ironman®



Internal

Specialty Energy Absorbing Lanyards



Arc Flash



WeldTech



Heavyweight®



WrapTech®

Positioning and Restraint Lanyards



Rebar Positioning



Rope Positioning



Fall Restraint



Assemblies

Vertical Sub-Systems



Vertical Lifelines



Adjusters and Arresters



Extenders and Carabiners



Dorsal D-ring Extenders



Carabiners




CREATING A
SAFER WORK
ENVIRONMENT

ENERGY ABSORBING LANYARDS

When available anchorages are not always ideally located overhead, Ironman® Dual-class Energy Absorbing Lanyards deliver problem solving solutions for both overhead/6' and foot level/12' Free Fall anchorage conditions. Available in single and double-leg configurations, Ironman® lanyards are also suitable for heavier users between 310 and 425 lbs for OSHA 6' Free Fall conditions when connected to overhead anchorages. All Ironman® lanyards meet ANSI Z359.12-2013.

FEATURES




Dual-class 6' and 12' Free Fall rated.



Patented ViewPack® energy absorber cover.



Integral SRL D-ring connection point (on select models).



Internal high-modulus elastic legs.



Steel and aluminum anchorage-end connectors.

8247ELY3D | Ironman® Elastic 12' Free Fall Lanyard

Transverse Load rated rebar hooks

US Patent #9,498,659

Ironman® Ironman® Dual-class Energy Absorbing Lanyards are the essential user solution to address changing worksite anchorage conditions by providing the deceleration to effectively arrest average fall forces experienced in both overhead/6' and foot level/12' Free Fall conditions for users weighing up to 310 lbs. Max. Supported in two user-preferred platforms with either elasticated or fixed-length legs including snap and rebar hooks in steel and aluminum plus, integrated SRL and Rescue D-rings available on select models. Additionally, heavier users weighing between 310 and 425 lbs. may also utilize Ironman® lanyards in overhead/6' Free Fall conditions.

8247ELY3D | Ironman® Lanyard

4½' to 6' Double-Leg

Transverse Load rated rebar hooks



100% tie-off Ironman® lanyard with elastic legs, steel snap hook for harness attachment and steel rebar hooks for anchorage connections plus, an integral D-ring for SRL connection.

8247EY3 | Ironman® Lanyard

4½' to 6' Double-Leg

Transverse Load rated rebar hooks



100% tie-off Ironman® lanyard with elastic legs, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8247EY: Lanyard with steel snap hooks for harness and anchorage connection.

8247EY3A | Ironman® Lanyard

4½' to 6' Double-Leg

Transverse Load rated rebar hooks



100% tie-off Ironman® lanyard with elastic legs, aluminum snap hook for harness attachment and aluminum rebar hooks for anchorage connections.

8247EA: Single-leg lanyard with aluminum snap hooks for harness and anchorage connection.

8247EY3R | Ironman® Lanyard

4½' to 6' Double-Leg

Transverse Load rated rebar hooks



100% tie-off Ironman® lanyard with elastic legs, steel snap hook for harness attachment and steel rebar hooks for anchorage connections plus, two integral D-rings for rescue applications.

8247EY3AR: Lanyard with aluminum snap and rebar hooks for harness and anchorage connection and two integral rescue D-rings.

8247BY3A | Ironman® Lanyard

6' Double-Leg

Transverse Load rated
rebar hooks

100% tie-off Ironman® lanyard with jacketed dual-layer polyester fixed-length web legs, aluminum snap hook for harness attachment and aluminum rebar hooks for anchorage connections.

8247BA: Single-leg lanyard with aluminum snap hooks for harness and anchorage connection.

8247B3 | Ironman® Lanyard

6' Single-Leg

Transverse Load rated
rebar hook

Ironman® lanyard with jacketed dual-layer polyester fixed-length web leg, steel snap hook for harness attachment and steel rebar hook for anchorage connection.

8247B: Lanyard with steel snap hooks for harness and anchorage connection.

8247BY3 | Ironman® Lanyard

6' Double-Leg

Transverse Load rated
rebar hooks

100% tie-off Ironman® lanyard with jacketed dual-layer polyester fixed-length web legs, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8247BY: 100% tie-off Lanyard with steel snap hooks for harness and anchorage connections.

8247Y3 | Ironman® Internal Lanyard

6' Double-Leg

Transverse Load rated
rebar hooks

100% tie-off Ironman® Internal lanyard with full-length internal energy absorber, steel swivel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8247Y: 100% tie-off Ironman® Internal lanyard with steel snap hooks for anchorage connections.

ViewPack® Traditional pack-style energy absorbing lanyards with extraordinary features including our patented ViewPack® cover with inspection window and WrapPack design to fully protect the enclosed product and inspection labels. All are built with abrasion and UV resistant polyester webbing, 1/4" vinyl coated galvanized cable or 5/8" 3-strand polyester rope and feature forged alloy steel or aluminum alloy harness and anchorage connectors.

82608 | ViewPack® Lanyard

6' Double-Leg



100% tie-off lanyard with polyester web and steel snap hooks for harness and anchorage connections.

826082D: 100% tie-off Tie-back lanyard with jacketed dual-layer polyester web, steel snap hook for harness attachment and steel snap hooks with sliding D-rings for tie-back anchorage connections.

826073A | ViewPack® Lanyard

6' Double-Leg

Transverse Load rated
rebar hooks

100% tie-off lanyard with polyester web, aluminum snap hook for harness attachment and aluminum rebar hooks for anchorage connections.

8260734A: 4' 100% tie-off lanyard with aluminum connectors.

826073 | ViewPack® Lanyard

6' Double-Leg

Transverse Load rated
rebar hooks

100% tie-off lanyard with polyester web, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8260733FT: 3' 100% tie-off lanyard.

8260734: 4' 100% tie-off lanyard.

8260732D | ViewPack® Lanyard

6' Double-Leg

Transverse Load rated
rebar hooks

100% tie-off Tie-back lanyard with jacketed dual-layer polyester web, steel snap hook for harness attachment and steel rebar hooks with sliding D-rings for tie-back anchorage connections.

826073ADJ: Adjustable 4½' to 6' 100% tie-off lanyard with jacketed dual-layer polyester web, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8257 | ViewPack® Lanyard

Adjustable Single-Leg



Adjustable 4½' to 6' lanyard with jacketed dual-layer polyester web and steel snap hooks for harness and anchorage connection.

8256 | ViewPack® Lanyard

6' Single-Leg



ViewPack® lanyard with polyester web and steel snap hooks for harness and anchorage connection.

8253: 3' polyester web lanyard.
8254: 4' polyester web lanyard.

82562 | ViewPack® Lanyard

6' Single-Leg



Tie-back lanyard with jacketed dual-layer polyester web, steel snap hook for harness attachment and steel snap hook with sliding D-ring for tie-back anchorage connection.

825623A: Tie-back lanyard with aluminum snap hook for harness attachment and aluminum rebar hook with sliding D-ring for anchorage connection.

82563 | ViewPack® Lanyard

6' Single-Leg

Transverse Load rated rebar hook



ViewPack® lanyard with polyester web, steel snap hook for harness attachment and steel rebar hook for anchorage connection.

82543: 4' polyester web lanyard.

8357 | ViewPack® Lanyard

6' Single-leg



ViewPack® lanyard with ¼" vinyl coated galvanized steel cable and steel snap hooks for harness and anchorage connection.

83573: Steel cable lanyard with steel snap hook for harness attachment and steel rebar hook for anchorage connection.

8106 | ViewPack® Lanyard

6' Single-Leg



ViewPack® lanyard with ¾" 3-strand polyester rope, steel thimbles and steel snap hooks for harness and anchorage connection.

8103: 3' rope lanyard.
8104: 4' rope lanyard.

8357Y3 | ViewPack® Lanyard

6' Double-Leg

Transverse Load rated rebar hooks



100% tie-off lanyard with ¼" vinyl coated galvanized steel cable, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8357Y: 100% tie-off lanyard with steel snap hooks for harness and anchorage connections.

8256ELY3 | ViewPack® Lanyard

4½' to 6' Double-Leg

Transverse Load rated rebar hooks



100% tie-off lanyard with abrasion resistant tubular polyester web and internal elastic, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8256EL: Elastic single-leg lanyard with steel snap hooks for harness and anchorage connection.
8256EL3: Elastic single-leg lanyard with steel snap hook for harness attachment and steel rebar hook for anchorage connection.

ElasTech®

All ElasTech® lanyards feature abrasion and UV resistant tubular polyester webbing and a full-length internal energy absorber allowing it to maintain its low-profile and flexible design. Coupled with a high-modulus internal elastic, each leg will expand and contract from 4½' to 6' with the user's movement and help to reduce snagging and tripping hazards. All lanyards include forged alloy steel or aluminum alloy harness and anchorage connectors (except where noted for choke-loop harness attachments).

8240Y3A | ElasTech® Lanyard

4½' to 6' Double-Leg

Transverse Load rated
rebar hooks

100% tie-off lanyard with tubular polyester web and internal elastic, aluminum snap hook for harness attachment and aluminum rebar hooks for anchorage connections.

8240Y3 | ElasTech® Lanyard

4½' to 6' Double-Leg

Transverse Load rated
rebar hooks

100% tie-off lanyard with tubular polyester web and internal elastic, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8240Y3L: 100% tie-off lanyard with choke-loop for harness attachment.

8240Y32D2R | ElasTech® Lanyard

4½' to 6' Double-Leg

Transverse Load rated
rebar hooks

100% tie-off lanyard with 3 integral D-rings for rescue and SRL connection, tubular polyester web with internal elastic, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8240Y32D | ElasTech® Lanyard

4½' to 6' Double-Leg

Transverse Load rated
rebar hooks

100% tie-off lanyard with integral D-ring for SRL connection, tubular polyester web with internal elastic, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8240Y2D: 100% tie-off lanyard with steel snap hooks for harness and anchorage connections and integral D-ring for SRL connection.

82403 | ElasTech® Lanyard

4½' to 6' Single-leg

Transverse Load rated
rebar hook

Lanyard with tubular polyester web and internal elastic, steel snap hook for harness attachment and steel rebar hook for anchorage connection.

82403L: Lanyard with choke-loop for harness attachment.

824032D | ElasTech® Lanyard

4½' to 6' Single-Leg

Transverse Load rated
rebar hook

Lanyard with integral D-ring for SRL connection, tubular polyester web and internal elastic, steel snap hook for harness attachment and steel rebar hook for anchorage connection.

8240 | ViewPack® Lanyard

4½' to 6' Single-Leg



Lanyard with tubular polyester web and internal elastic, steel snap hooks for harness and anchorage connection.

8240L: Lanyard with choke-loop for harness attachment.

8240Y: Double-leg lanyard with steel snap hooks for harness and anchorage connections.

8240A | ElasTech® Lanyard

4½' to 6' Single-Leg



Lanyard with tubular polyester web and internal elastic, aluminum snap hooks for harness and anchorage connection.

82403A: Lanyard with aluminum rebar hook for anchorage connection.

Internal

The FallTech® Internal series is the end-user's preference for familiar fall arrest applications and our most economical energy absorbing lanyard. Featuring abrasion and UV resistant tubular polyester webbing and full-length internal energy absorbers, our Internal lanyards maintain the lowest profile and lightest weight available and all feature forged alloy steel harness and anchorage connectors (except where noted for choke-loop harness attachments).

8259Y3 | Internal Lanyard

6' Double-Leg



Transverse Load rated rebar hooks

100% tie-off lanyard with tubular polyester web, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8259Y3L: Lanyard with choke-loop for harness attachment.

8259Y: Lanyard with steel snap hooks for harness and anchorage connections.

8259 | Internal Lanyard

6' Single-Leg



Internal lanyard with tubular polyester web and steel snap hooks for harness and anchorage connection.

8259L: Lanyard with choke-loop for harness attachment.

82593: Lanyard with steel rebar hook for anchorage connection.

Soft Pack

Soft Pack energy absorbing lanyards provide a low cost option for those preferring a pack-style lanyard. All Soft Pack series lanyards are constructed with 100% polyester webbing throughout including UV and abrasion resistant leg web, tear-away energy absorber and Soft Pack cover. Additionally, all lanyards feature forged alloy steel snap and rebar hooks for harness and anchorage connections (except where noted).

8256LTY | Soft Pack Lanyard

6' Double-Leg



100% tie-off lanyard with 1" polyester web and steel snap hooks for harness and anchorage connections.

#8256LTY3: Lanyard with steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8256LT | Soft Pack Lanyard

6' Single-Leg



Soft Pack lanyard with 1" polyester web and steel snap hooks for harness and anchorage connection.

8256LT3FT: 3' lanyard with steel snap hooks.

8256LTL: Lanyard with choke-loop for harness attachment.

8256LT3: Lanyard with steel rebar hook for anchorage connection.

Leading Edge

FallTech® Leading Edge cable lanyards boast the combined protection of featuring 1/4" coated galvanized steel cable legs and our ViewPack® Dual-class 12' Free Fall energy absorber. The cable legs provide cut and abrasion resistance in work conditions with sharp and leading edges, and the 12' Free Fall energy absorber is ideally suited for foot-level tie-off. Not only built for users weighing up to 310 lbs. in both overhead and foot-level conditions, heavier users weighing up to 425 lbs. may also utilize our Cable LE lanyards in overhead/6' Free Fall conditions. Available with forged alloy steel and aluminum alloy snap and rebar hook options.

8354LEYSS3D | Leading Edge Lanyard

6' Double-Leg



Transverse Load rated rebar hooks

100% tie-off lanyard with coated cable legs, steel swivel snap hook for harness attachment and steel swivel rebar hooks for anchorage connections plus integral D-ring for SRL connection.

8354LEY3D: Lanyard with standard non-swivel snap and rebar hooks with D-ring for SRL connection.

8354LEY3A | Leading Edge Lanyard

6' Double-Leg



Transverse Load rated rebar hooks

100% tie-off lanyard with coated cable legs, aluminum snap hook for harness attachment and aluminum rebar hooks for anchorage connections.

8354LEYA: Lanyard with aluminum snap hooks for harness and anchorage connections.

8354LE3 | Leading Edge Lanyard

6' Single-Leg



Transverse Load rated rebar hook

Lanyard with coated cable leg, steel snap hook for harness attachment and steel rebar hook for anchorage connection.

8354LE: Lanyard with steel snap hooks for harness and anchorage connection.

8354LEY3 | Leading Edge Lanyard

6' Double-Leg



Transverse Load rated rebar hooks

100% tie-off lanyard with coated cable legs, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8354LEY: Lanyard with steel snap hooks for harness and anchorage connections.

Specialty

For specialty conditions and applications, FallTech® provides a range of solutions to meet those needs. WrapTech® lanyards eliminate the need for a separate anchor tie-off point by featuring a 5,000 lb. gated carabiner and double-layer jacketed web. Our Heavyweight® Internal series lanyards provide ample fall force protection well under the OSHA limit for overhead anchorage by users weighing between 310 lbs. up to 425 lbs. and our coated-series lanyards feature a flexible urethane coating to deliver protection to the polyester leg webbing within and provide easy clean-up, water resistance and long-life in the harshest environments.

8246 | Heavyweight® Lanyard

6' Single-Leg



Heavyweight® lanyard with full-length internal energy absorber and steel snap hooks for harness and anchorage connection.

82463: Lanyard with steel rebar hook for anchorage connection.

8246Y3 | Heavyweight® Lanyard

6' Double-Leg



100% tie-off Heavyweight® lanyard with full-length internal energy absorbers, steel swivel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8246Y: Lanyard with steel snap hooks for anchorage connections.

8256PC | Urethane Coated Lanyard

6' Single-Leg



Urethane Coated lanyard with ViewPack® external energy absorber and steel snap hooks for harness attachment and anchorage connection.

82563PC: Coated lanyard with steel rebar hook for anchorage connection.

826073PC: Double-leg lanyard with steel rebar hooks for anchorage connections.

8241Y | WrapTech® Lanyard

6' Double-Leg



100% tie-off WrapTech® Tie-back lanyard with ViewPack® external energy absorber, jacketed dual-layer polyester web legs, 5,000 lb. gated carabiners for tie-back anchorage and steel snap hook for harness attachment.

8241: Single-leg WrapTech® Tie-back lanyard with snap hook and 5,000 lb. gated carabiner.

Arc Flash

Built to withstand at-height arc flash events and provide superior protection from current flow in electrically charged work environments, all FallTech Arc Flash lanyards are 3rd-party tested to meet ASTM F887 standards. Constructed with Kevlar® and Nomex® webbing, Soft Pack external energy absorbers with options featuring choke-loops or alloy steel snap hooks for dorsal D-ring attachment and alloy steel snap or rebar hooks for anchorage connections.

8242L | Arc Flash Looped Lanyard

6' Single-Leg



Arc Flash lanyard with Kevlar® leg webbing and Nomex® absorber cover, choke-loop for harness attachment and steel snap hook for anchorage connection.

82424L: 4' Lanyard with choke-loop.

82423L: Lanyard with steel rebar hook for anchorage connection.

8242AF | Arc Flash Lanyard

6' Single-Leg



Arc Flash lanyard with Kevlar® leg webbing and Nomex® absorber cover and steel snap hooks for harness and anchorage connection.

#82423AF: Lanyard with steel rebar hook for anchorage connection.

8242Y3L | Arc Flash Looped Lanyard

6' Double-Leg



100% tie-off Arc Flash lanyard with Kevlar® leg webbing and Nomex® absorber cover, choke-loop for harness attachment and steel rebar hooks for anchorage connections.

#8242YL: Lanyard with steel snap hooks for anchorage connections.

8242Y3AF | Arc Flash Lanyard

6' Double-Leg



100% tie-off Arc Flash lanyard with Kevlar® leg webbing and Nomex® absorber cover, steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8242YAF: Lanyard with steel snap hooks for anchorage connections.

WeldTech™

Available with Soft Pack or full-length Internal energy absorbers, WeldTech™ lanyards provide excellent spatter and burn resistance commonly found in hot work welding applications and all feature alloy steel snap and rebar hooks for harness and anchorage connections. Soft Pack styles are constructed with Kevlar® leg webbing and Nomex® absorber covers while Internal lanyards feature a tubular Nomex® jacket to fully protect the polyester materials within.

8242 | WeldTech™ Soft Pack Lanyard

6' Single-Leg



WeldTech™ Soft Pack lanyard with steel snap hooks for harness and anchorage connection.

82423: Lanyard with steel rebar hook for anchorage connections.

8242Y3 | WeldTech™ Soft Pack Lanyard

6' Double-Leg

Transverse Load rated rebar hooks



100% tie-off WeldTech™ Soft Pack lanyard with steel snap hook for harness attachment and steel rebar hooks for anchorage connections.

8242Y: Lanyard with steel snap hooks for anchorage connections.

82433 | WeldTech™ Internal Lanyard

6' Single-Leg

Transverse Load rated rebar hook



WeldTech™ Internal lanyard with steel snap hook for harness attachment and steel rebar hook for anchorage connection.

8243: Lanyard with steel snap hooks for harness and anchorage connection.

8243Y | WeldTech™ Internal Lanyard

6' Double-Leg



100% tie-off WeldTech™ Internal lanyard with steel snap hooks for harness and anchorage connections.

8243Y3: Lanyard with steel rebar hooks for anchorage connections.

Restraint

All FallTech® restraint lanyards provide a simple and effective fall prevention function; to keep users from reaching fall hazards. Available in a wide range of preferred fixed lengths and materials including abrasion resistant polyester web, coated and uncoated galvanized steel cable and 3-strand polyester rope. Our adjustable restraint lanyards are built with double-layer polyester web for general purpose use and Kevlar web options for Arc Flash and hot work welding applications.

8206 | Restraint Lanyard

Fixed-Length Web



6' web restraint lanyard with steel snap hooks.

8203: 3' web restraint lanyard.
8204: 4' web restraint lanyard.
82068: 8' web restraint lanyard.
8206Y: 6' double-leg web restraint lanyard.

82063 | Restraint Lanyard

Fixed-Length Web

Transverse Load rated rebar hook



6' restraint lanyard with steel snap and rebar hook.

82033: 3' web restraint lanyard.
82043: 4' web restraint lanyard.
8206Y3: 6' double-leg web restraint lanyard.

8306 | Restraint Lanyard

Fixed-Length Cable



6' cable restraint lanyard with steel snap hooks.

830636: 3' cable restraint lanyard.
83064: 4' cable restraint lanyard.
8307: 6' coated cable restraint lanyard.
830708: 8' coated cable restraint lanyard.

8156 | Restraint Lanyard

Fixed-Length Rope



6' restraint lanyard with 5/8" 3-strand polyester rope and steel snap hooks.

8153: 3' rope restraint lanyard.
8154: 4' rope restraint lanyard.
81563: 6' rope restraint lanyard with rebar hook.

8209 | Restraint Lanyard

Adjustable Web



4' to 6' adjustable length jacketed dual-layer web restraint lanyard with steel snap hooks.

82098: 5' to 8' web restraint lanyard.
820910: 6' to 10' web restraint lanyard.
820912: 7' to 12' web restraint lanyard.
82093: 4' to 6' web restraint lanyard with rebar hook
 Additional adjustable lengths available.

8209AF | Restraint Lanyard

Adjustable Arc Flash



4' to 6' adjustable Arc Flash restraint lanyard with Kevlar® web, insulated steel adjuster buckle, steel snap hook and Nomex® jacketed choke-loop.

8209WT: 4' to 6' adjustable WeldTech restraint lanyard with Kevlar® web and steel snap hooks.

Rebar Positioning

FallTech® rebar positioning lanyard assemblies are built to meet the daily challenges faced in elevated concrete form work and rebar wall construction and provide the user with the support needed to confidently work with both hands free. A wide range of configurations are available with Grade 80 welded-link chain or double-layer web constituents, alloy steel and aluminum alloy hip D-ring connectors with swiveling and standard rebar hooks for vertical rebar connection.

8250W | Rebar Positioning Lanyard

Dual-Layer Web

Transverse Load rated rebar hook



23" lanyard with jacketed dual-layer polyester web, steel snap hooks for hip D-ring attachment and swiveling rebar hook for vertical rebar connection.

825012W: 19" web lanyard with steel snap hooks and swiveling rebar hook.

8250 | Rebar Positioning Lanyard

Welded-Link Chain

Transverse Load rated rebar hook



23" lanyard with 9/32" Grade 80 chain, steel snap hooks for hip D-ring attachment and swiveling rebar hook for vertical rebar connection.

82506L: 17" chain lanyard with steel snap hooks and swiveling rebar hook.

825010LK: 19" chain lanyard with steel snap hooks and swiveling rebar hook.

8250A: 24" chain lanyard with steel swivel shackle and aluminum rebar hook.

8250LTW | Rebar Positioning Lanyard

Dual-Layer Web

Transverse Load rated rebar hook



24" lanyard with jacketed dual-layer polyester web, steel snap hooks for hip D-ring attachment and standard non-swivel rebar hook for vertical rebar connection.

8250LTWA: 24" web lanyard with aluminum snap hooks and aluminum standard non-swivel rebar hook.

8250LTWTA: 24" Kevlar® web lanyard with aluminum snap and rebar hooks.

8250LT | Rebar Positioning Lanyard

Welded-Link Chain

Transverse Load rated rebar hook



21" lanyard with 9/32" Grade 80 chain, steel snap hooks for hip D-ring attachment and standard non-swivel rebar hook for vertical rebar connection.

8250LT10LK: 17" chain lanyard with steel snap hooks and standard non-swivel rebar hook.

Rope Positioning

Tower Climber® rope positioning lanyards provide light weight and adjustable length in hands-free work applications. All lanyards include an auto-locking one-hand operation aluminum rope adjuster and two integral connectors for balanced weight distribution on the hip D-rings. Available in 6½' and 10' lengths, all lanyards feature 7/16" nylon kernmantle rope with sewn terminations on both ends and a 23" tubular sheath for abrasion resistance. Connector options include alloy steel and aluminum alloy snap hooks and carabiners plus, a no-connector option for those who prefer to integrate their own.

8165B | Rope Positioning

Steel



6½' lanyard with steel snap hook and carabiner.

8165C | Rope Positioning

Steel



6½' lanyard with two steel carabiners.

8165D | Rope Positioning

Aluminum



6½' lanyard with aluminum snap hook and carabiner.

8165E | Rope Positioning

Aluminum



6½' lanyard with two aluminum carabiners.

6½'	10'	Material	Connectors
8165B65	8165B10	Steel	Snap Hook and carabiner
8165C65	8165C10	Steel	Two carabiners
8165D65	8165D10	Aluminum	Snap Hook and carabiner
8165E65	8165E10	Aluminum	Two carabiners
8165A65	8165A10	User-supplied connectors required	

User-preferred and configured spreader assemblies are designed to fit the most common close-work positioning applications. Each assembly includes an 8½" alloy steel double-hook spreader with center captive-eye. Options are available with swiveling rebar hooks and integral alloy steel carabiners or web extender.

8458 | 16" Positioning Assembly

Steel

Transverse Load rated rebar hook



Swivel rebar hook, carabiner and spreader hook.

8459 | 18" Positioning Assembly

Steel

Transverse Load rated rebar hook



Swivel rebar hook, web leg and spreader hook.

8457 | 5" Positioning Assembly

Steel



Carabiner and spreader hook.

8456: 8½" double-hook spreader; no carabiner.

Arresters and Adjusters

FallTech® provides a wide range of Rope Adjusters and Fall Arresters for user ascent and descent mobility while maintaining continuous vertical anchorage on 5/8" rope lifelines. Offered separately and with pre-attached 3' energy absorbing lanyards, our range of options includes manually operated and trailing devices with user-preferred functions including hinged and anti-inversion models and, to meet ANSI Z359.15 Standards, the anti-panic function provides the safest user solution available.

8353LT | Rope Adjuster

Manual



Manually operated rope adjuster with 3' Soft Pack energy absorbing lanyard.

8353: Manual rope adjuster with 3' ViewPack® energy absorbing lanyard.

8358 | Rope Adjuster

Hinged Trailing



Hinged trailing rope adjuster with 3' ViewPack® energy absorbing lanyard.

8359: Stainless steel hinged trailing rope adjuster with 3' ViewPack energy absorbing lanyard.

8358LT: Hinged trailing rope adjuster with Soft Pack energy absorbing lanyard.

8368 | Rope Adjuster

Trailing



Trailing rope adjuster with 3' ViewPack® energy absorbing lanyard.

8355: Trailing/Parking hinged rope adjuster with 3' ViewPack® energy absorbing lanyard.

8388 | Fall Arrester

Anti-panic



Hinged trailing fall arrester with Anti-panic and 3' ViewPack® energy absorbing lanyard.

7609 | Cable Sleeve

Hinged Trailing



Alloy steel cable sleeve with hinged trailing mobility for 3/8" steel cable. Includes carabiner for sternal D-ring attachment.

7491 | Rope Adjuster

Hinged Trailing



Stainless steel rope adjuster with hinged trailing mobility and anti-inversion function.

7479 | Rope Adjuster

Hinged Trailing



Alloy steel rope adjuster with hinged trailing mobility and anti-inversion function.

7489 | Fall Arrester

Anti-panic



Alloy steel fall arrester with anti-panic and anti-inversion functions and hinged trailing mobility.

Vertical Lifelines

Paired with our rope adjusters and fall arresters, FallTech® Vertical Lifelines deliver continuous fall protection anchorage for the ascending and descending mobile user. Various standard lengths are available with snap hook anchoring ends and multiple trailing end configurations including back-splice, tape-end and double snap hook. All FallTech lifelines feature 5/8" diameter rope with splice protecting heat-shrink sleeves to resist abrasion and our proprietary steel thimbles for added durability.

8150T | Premium Vertical Lifeline

Tape-end



50' vertical lifeline features low-stretch premium 5/8" 3-strand twisted polyester rope with integral steel thimble and snap hook on the anchoring end plus a taped trailing end for simple user replacement with manual adjusters.

8125T: 25' lifeline with taped trailing end.

8130T: 30' lifeline with taped trailing end.

8200T: 100' lifeline with taped trailing end.

7120: 5 lb. Lifeline Counterweight also available.

8150 | Premium Vertical Lifeline

Back-Splice



50' vertical lifeline features low-stretch premium 5/8" 3-strand twisted polyester rope with integral steel thimble and snap hook on the anchoring end and the back-spliced trailing end is ideally suited for replacement with hinged adjusters.

8125: 25' lifeline with back-spliced trailing end.

8175: 75' lifeline with back-spliced trailing end.

8200: 100' lifeline with back-spliced trailing end.

81505: 150' lifeline with back-spliced trailing end.

8150DH | Premium Vertical Lifeline

Double-Snap Hook



50' vertical lifeline features low-stretch premium 5/8" 3-strand twisted polyester rope with integral steel thimbles and snap hooks on each end. The second snap hook is ideal for attaching a counterweight.

8125DH: 25' lifeline with two snap hooks.

81200DH: 100' lifeline with two snap hooks.

8149 | Standard Vertical Lifeline

Back-Splice



50' vertical lifeline features construction-grade 5/8" 3-strand twisted copolymer rope with integral steel thimble and snap hook on the anchoring end and a back-spliced trailing end.

8149T: 50' lifeline with taped trailing end.

Extenders and Carabiners

FallTech® D-ring extenders provide extra length to the Dorsal D-ring making it easier for users to connect SRLs and energy absorbing lanyards and, are available for a wider range of applications with configurations and lengths to accommodate user's specific needs and reach. Our offering of carabiners deliver high strength reliability for multi-use multi-purpose connecting of fall arrest components and are available in both forged alloy steel and aluminum alloy in varied sizes. All FallTech carabiners feature self-closing self-locking gates with 3,600 lbs. face and side load strength.

8366 | D-ring Extender

Snap Hook



18" extender features 1" polyester web with steel snap hook and connecting ring.

8202: 14" extender.
836616: 16" extender.
836624: 24" extender.

8366L | D-ring Extender

Choke-Loop



18" extender with 1" polyester web, dorsal choke-loop and steel connecting ring.

83662D: 18" extender with two D-rings for user transition between deceleration devices.

8366C | D-ring Extender

Cable



18" extender features ¼" galvanized steel cable, steel snap hook and connecting ring.

8366LAF | D-ring Extender

Arc Flash



18" extender features Nomex® web, overmold insulated connecting D-ring and choke-loop for protection from Arc Flash hazards and current flow in electrically charged work environments.

8447 | Carabiner


Steel



8" x 4¼" inside dimensions with 2¼" gate opening.

8450 | Carabiner

Steel



4" x 2" inside dimensions with 1" gate opening.

8445 | Carabiner

Steel



3¼" x 1¾" inside dimensions with 7⁄8" gate opening.

5071 | SRL Carabiner

Triple-Lock Steel



3¾" x 1½" inside dimensions with ½" triple-lock gate opening. Includes insert clip for dorsal web and SRL alignment.

5073H | SRL Connector

Steel



2" x ¾" inside dimensions with 2" gate opening for simplified dorsal SRL attachment.

8466A | Carabiner

Aluminum



3¾" x 2" inside dimensions with 7⁄8" gate opening.


8447A | Carabiner

Aluminum



8" x 3¾" inside dimensions with 2" gate opening.

5072 alignment clip only.

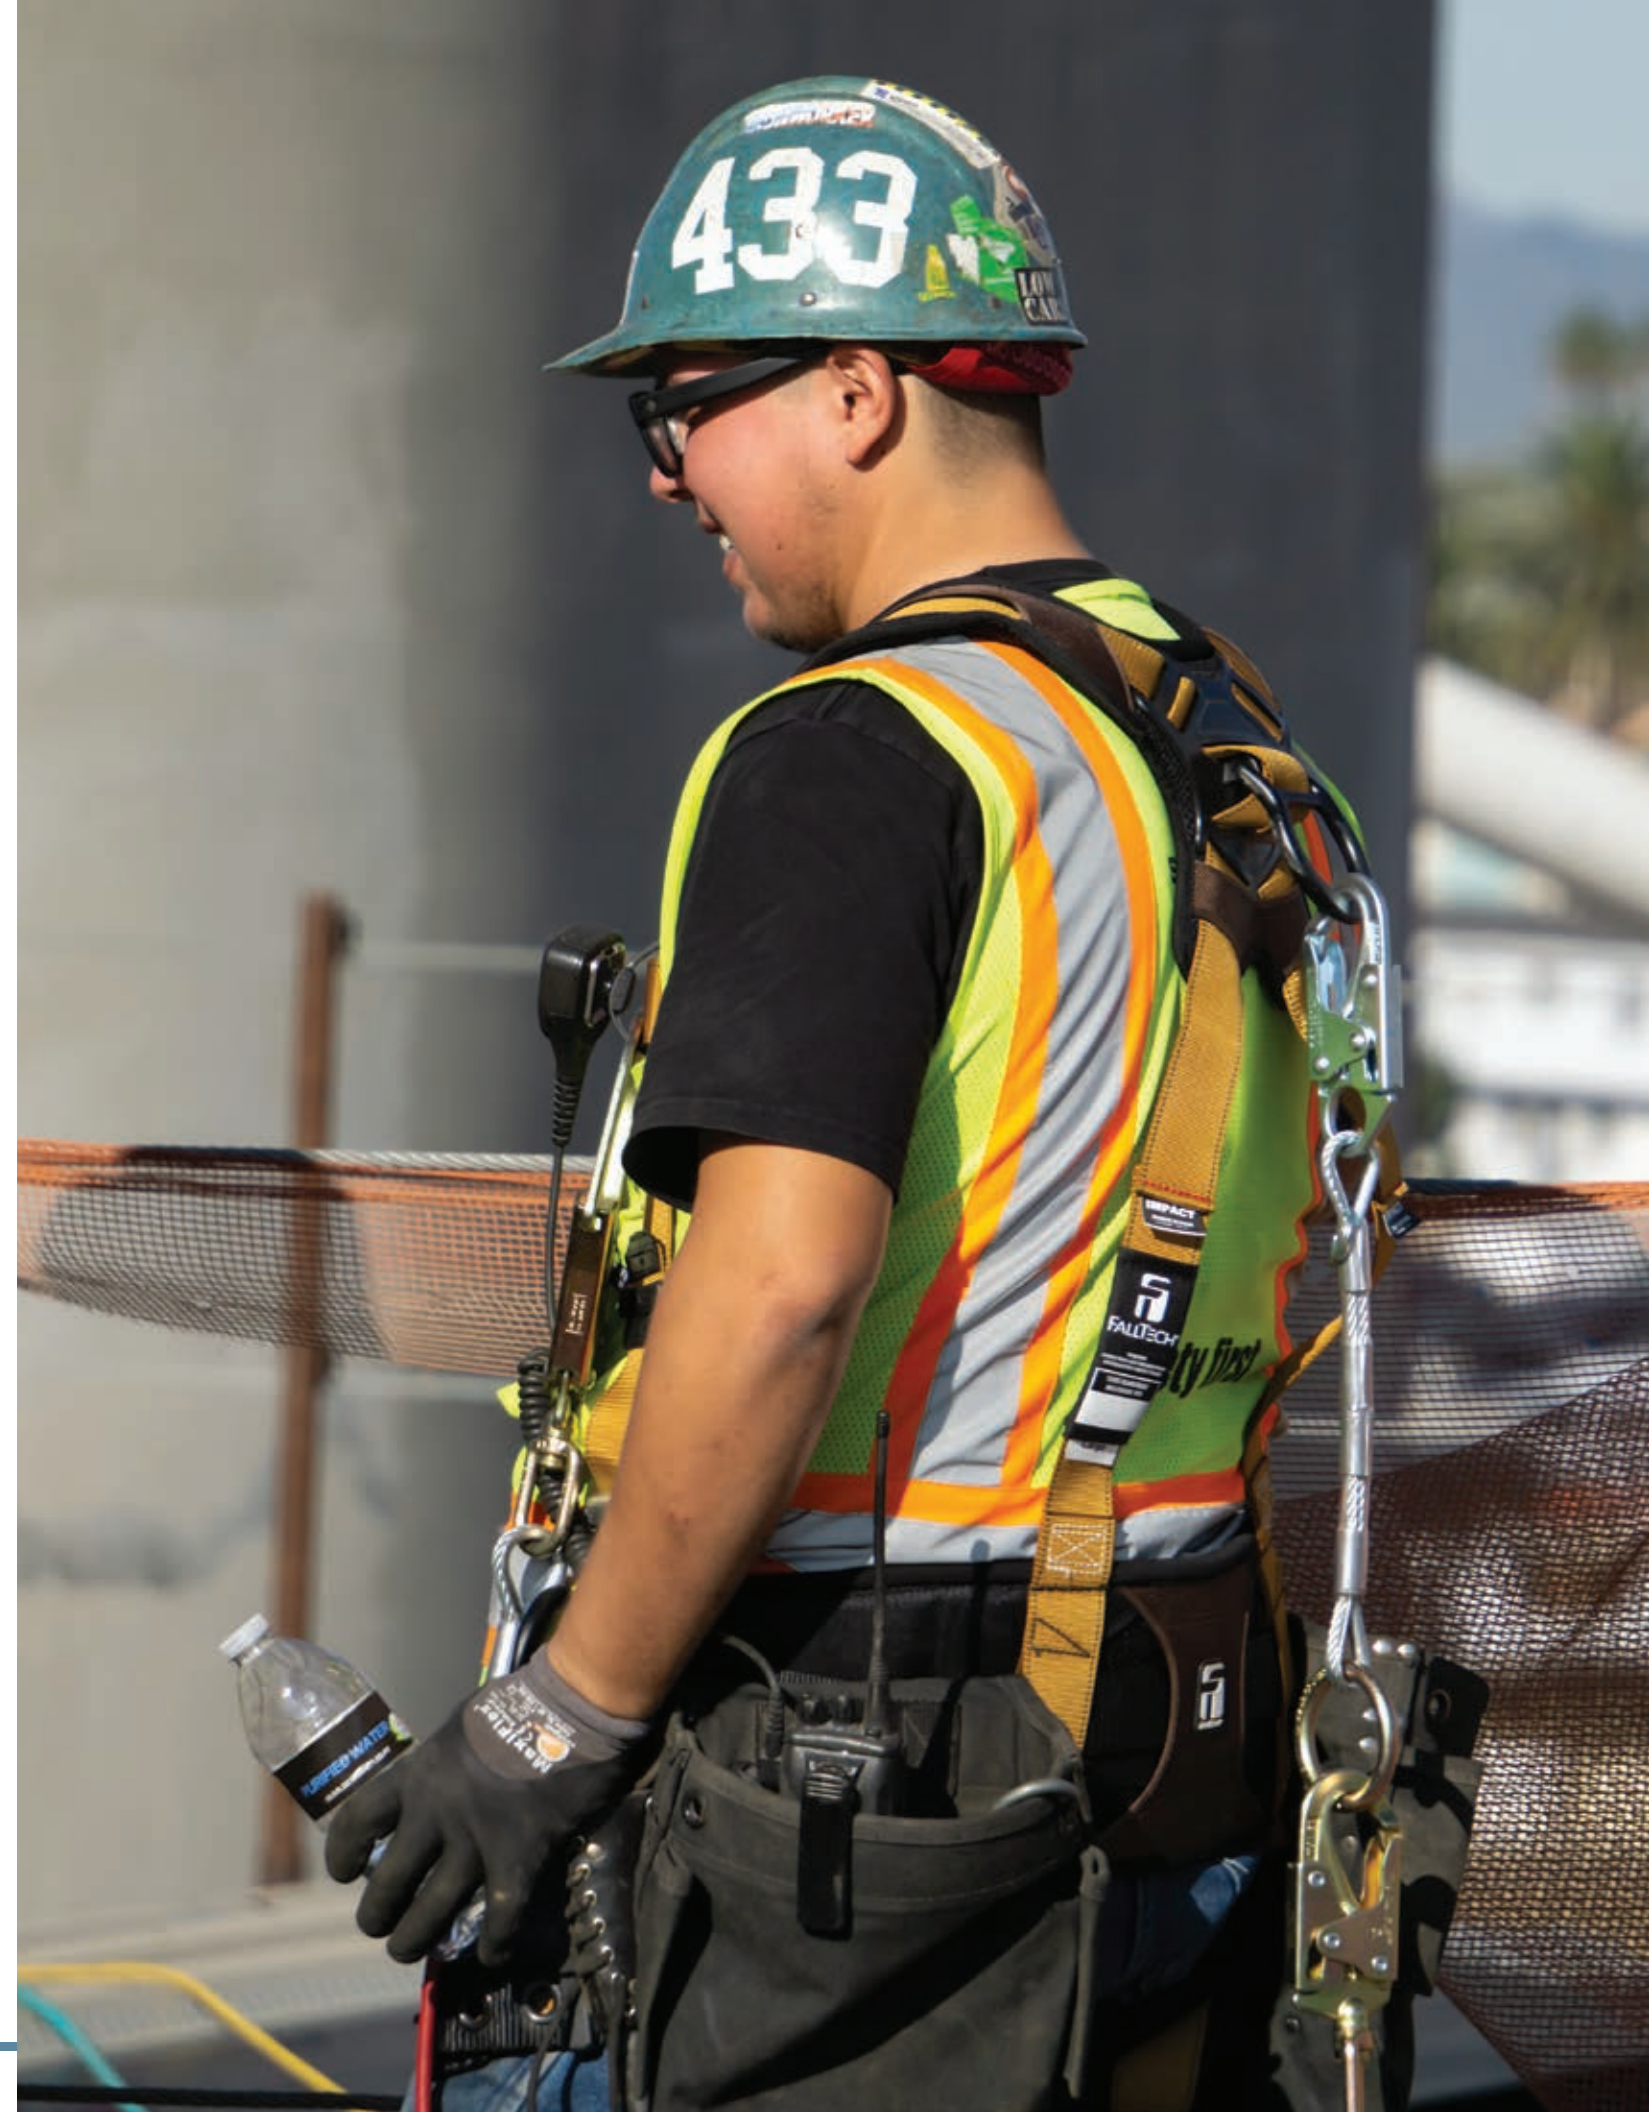

DEVICES

FallTech® offers a full range of self-retracting lifeline solutions to meet nearly every user requirement and, for a wide range of applications. Whether the user is in construction, utilities maintenance or general industry or, the installation is overhead, at foot-level or personally attached to the harness, DuraTech® and Contractor SRLs provide durable performance and reliability that's supported with documentation to meet all industry standards.

DuraTech® SRLs

When there's no margin for error on your job, DuraTech® SRLs deliver quick stopping power with minimal force on the body and anchorage.

Meeting the industry's highest standards, DuraTech® SRLs bring consistent performance to the most challenging work environments.



7232C

7232CLE

DuraTech overhead and leading edge SRLs feature side-payout aluminum housings, load-indicating swivel snap hooks and recoil spring hand-grip lifelines combined with internal inertial brakes.

Additionally, Leading Edge SRLs include an integral external ViewPack® energy absorber and 7/32" cable to reduce the risk of lifeline failure when contacting a sharp leading edge and may also be used in overhead applications.

Contractor SRLs

Contractor SRLs provide economical fall arrest solutions without compromising on safety or performance.

Fully featured and built to last, Contractor SRLs deliver the value and functionality users expect and demand from FallTech.



727630

727630LE

Contractor and Contractor Leading Edge SRLs include internal inertial brake, glass-filled nylon housings, load-indicating swivel snap hooks and recoil spring lifeline assemblies.

Leading Edge SRLs include an integral external ViewPack® energy absorber and 7/32" cable to reduce the risk of lifeline failure when contacting a sharp leading edge and may also be used in overhead applications.

Compact Overhead SRLs

DuraTech® compact web and cable SRLs bring the same dependable overhead performance as larger units and, provide excellent user mobility.

Internal inertial brakes and locking pawls support smooth deceleration and positive stopping action.



82710SC1

83709SB7

DuraTech® 10' Web SRLs include Dyneema® web lifelines to resist abrasion and glass reinforced polycarbonate housings with TPR overmold to provide unmatched impact resistance.

DuraTech® 9' SRLs feature a side-outlet design to reduce wear on the cable and orifice and include 3/16" galvanized and stainless steel cable options with compatible alloy steel and stainless steel load-indicating swivel snap hooks.

Personal Mini SRLs

FallTech Mini SRLs deliver Fall Arrest performance beyond the capabilities of traditional energy absorbing lanyards.

WrapTech® Tie-back SRLs provide wrap-around anchorage connection eliminating the need for a separate anchorage connector.



72706TB3

74709TB8

FallTech® Mini SRLs are available in single and twin-leg options with multiple steel and aluminum anchorage and harness-end connector options and may be anchored up to 5' below the dorsal D-ring for user's weighing up to 310 lbs. max.

WrapTech® SRLs feature tie-back abrasion resistant jacketed Dyneema® web lifelines and may be anchored from 2' to 5' below the dorsal D-ring depending on the anchorage diameter for user's weighing up to 310 lbs max.

DuraTech® SRLs

DuraTech® Personal SRLs deliver uncommon durability with uncompromised performance. DuraTech® 6' SRL boast shorter arrest distances for a wider range of work locations and, DuraTech® 9' Max SRLs allow increased user weight capacity plus, a greater anchorage distance below the user's dorsal D-ring.



82706TB5

82709TB3

Both DuraTech® SRLs feature internal inertial brakes and locking pawls to produce smooth deceleration and positive stopping action and nylon overmold housings that provide unmatched impact resistance.

6' DuraTech® SRL's may be anchored up to 2' below the dorsal D-ring for user's weighing up to 310 lbs. max. 9' Max SRL's may be anchored up to 5' below the dorsal D-ring for users weighing up to 310 lbs. max while complying with ANSI and, up to 425 lbs. max user weight under OSHA regulations.

PURPOSE-BUILT
TO EXACTING
REQUIREMENTS

DURATECH® LEADING EDGE

FallTech's DuraTech® Leading Edge SRLs deliver the highest level of fall safety when facing common construction site unprotected sides and edges specifically, sharp leading edges. All DuraTech® Leading Edge SRLs have been thoroughly tested to the demanding ANSI Z359.14-2014 LE Standards developed specifically for leading edge performance. All Leading Edge SRLs may be utilized for traditional overhead anchorages and for below D-ring applications common when facing leading edge hazards.



FEATURES




1 Side-payout cable orifice.



2 Stackable aluminum housing design.




3 Patented ViewPack® energy absorber cover.



4 Recoil Spring hand-grip assembly.



5 Load-indicating swivel snap hook.



6 7/32" galvanized steel cable.

7232CLE | DuraTech® 30' LE SRL

US Patent #9,498,659

DuraTech®

DuraTech® SRLs deliver proven performance for reliability that mobile users depend on every day and the reduced activation and arresting distances deliver lower minimum required fall clearances. Built with precision machined aluminum alloy drums and housings, dual internal inertial brake discs, brass pawls, lightweight manganese ratchet centers and aluminum main shafts, DuraTech SRLs are available with galvanized and stainless steel lifeline options in a variety of lengths to fit most all overhead and leading edge fall arrest applications.

7265CLE | DuraTech® 60' LE Cable SRL

Galvanized



DuraTech® Leading Edge SRLs are designed for both overhead and below D-ring anchorage applications featuring an integrated external energy absorber to enhance the internal braking system and preserve lifeline integrity and, a rugged 7/32" galvanized steel cable to resist cuts over sharp and abrasive leading edges. Equipped with a Recoil Spring hand-grip assembly to help prevent lifeline lock-up and provide simple dorsal connection plus, a load-indicating swivel snap hook to provide visual fall event indication and help prevent lifeline twisting. The side-payout housing design produces smooth operation and reduces nuisance lock-up and comes outfitted with an extra large steel anchorage carabiner.

Part#	Length
7226CLE	15'
7227CLE	20'
7232CLE	30'
7265CLE	60'

7268C | DuraTech® 50' Cable SRL

Galvanized



Our improved DuraTech® C-series SRLs also feature the new side-payout housing for uniform operation and reduced wear on the orifice and provides a stackable design for easy storage. Furnished with an internal braking system that delivers positive deceleration, durable 3/16" galvanized steel cable lifeline with load-indicating swivel snap and our Recoil Spring hand-grip assembly helps prevent accidental user lock-up.

Part#	Length
7226C	15'
7227C	20'
7229C	25'
7232C	30'
7268C	50'
7265C	60'

7268CS | DuraTech® 50' Cable SRL



Stainless Steel

DuraTech® CS-series SRLs include all the same features and improvements created in the C-series however these SRLs feature 3/16" stainless steel cable lifelines. Additionally, we also offer CSS-series SRLs with additional stainless steel components including the load-indicating swivel snap hook and the internal pressure plate. All CS and CSS-series SRLs deliver the added corrosion resistance users require in harsh environments.

Part#	Length
7227CS	20'
7232CS	30'
7268CS	50'
7265CS	60'

Part#	Length
7227CSS	20'
7232CSS	30'
7268CSS	50'
7265CSS	60'

7268 | DuraTech® 50' Cable SRL



Galvanized

Our original DuraTech® SRLs still feature all the proven field performance and durability we've provided for more than 15 years including the rugged aluminum housings with integrated carry handles and the internal braking system. All feature 3/16" galvanized steel cable lifelines, load-indicating swivel snap hooks and Recoil Spring hand-grips.

Part#	Length
7226	15'
7227	20'
7229	25'
7232	30'
7268	50'
7265	60'

7268HW | Heavyweight® 50' Cable SRL



Galvanized

Boasting increased user weight capacity, original DuraTech® Heavyweight® SRLs are engineered specifically for users weighing up to 425 lbs. and continue to deliver the same durable performance and reliability as our standard SRLs. Like our standard SRLs, the Heavyweight® series also include 3/16" cable, load-indicating swivel snap hook and Recoil Spring hand-grip.

Part#	Length
7226HW	15'
7227HW	20'
7232HW	30'
7268HW	50'
7265HW	60'

Contractor

Dependable functionality without compromise for safety, Contractor series SRLs afford the user with reliable and cost-effective solutions for fall arrest applications. Field-use verified and thoroughly lab tested, Contractor SRLs exceed all industry performance standards including ANSI Z359.14. All Contractor SRLs feature rugged glass-filled nylon housings, internal inertial brake systems, load-indicating swivel snap hooks and anchorage carabiners.

727650LE | Contractor 50' LE Cable SRL



Galvanized

Contractor Leading Edge SRLs are designed for both below D-ring and overhead applications featuring an integrated external energy absorber to enhance the internal braking system and preserve lifeline integrity and a rugged 7/32" galvanized steel cable to resist cuts over sharp and abrasive leading edges. Outfitted with a Recoil Spring hand-grip assembly to help prevent lifeline lock-up and provide simple dorsal D-ring connection plus a load-indicating swivel snap hook that provides visual fall event indication and helps prevent lifeline twisting. Contractor Leading Edge SRLs are equipped with a glass-filled nylon housing and anchorage carabiner.

Part#	Length
727620LE	20'
727630LE	30'
727650LE	50'

7276WR | Contractor 20' Web SRL



Dyneema®

Our Contractor Web SRL also features a glass-filled nylon housing, load-indicating swivel snap hook and an anchorage carabiner comparable to the cable series SRLs. This device includes a Dyneema® web lifeline for abrasion resistance and an internal over-molded alloy steel frame for unsurpassed durability.

727650 | Contractor 50' Cable SRL



Galvanized

FallTech® Contractor SRLs support economical solutions for everyday overhead fall arrest applications in construction, maintenance, petro-chem and general industry. All Contractor series SRLs feature 3/16" galvanized steel cable with load-indicating swivel snap hook, Recoil Spring hand-grip, glass-filled nylon housing and anchorage carabiner.

Part#	Length
727620	20'
727630	30'
727650	50'
7276100	100'

8262 | 8' Overhead Retractor



Polyester

The FallTech® Overhead Retractor highlights an internal steel frame with PVC cover, integral steel swivel and anchorage carabiner, and a polyester web lifeline with alloy steel snap hook.

82624: 8' retractor with 8447 large carabiner.

DURATECH® MINI

DuraTech® Mini SRLs are a recognized replacement for traditional energy absorbing lanyards and provide added user benefits that lanyards cannot deliver. The most important of these benefits is the user's reduced minimum fall clearance which in turn supports the use in more applications. Available in single and twin leg configurations for overhead and dorsal D-ring attachment, DuraTech® Mini personal SRLs are versatile, lightweight and sensibly affordable solutions for most all personal fall arrest systems.

FEATURES



1 Dorsal-connect carabiner with alignment clip.



2 Integral housing swivel-eyes.



3 Impact resistant nylon housing.



4 Patented ViewPack® energy absorber cover.



5 Abrasion resistant Dyneema® web lifeline.



6 Steel and aluminum lifeline-end connectors.

72706TB3 | DuraTech® Mini 6' Web SRL

US Patent #9,498,659

DuraTech® Mini

DuraTech® Mini 6' Web SRLs deliver fall arrest performance beyond the capabilities of traditional energy absorbing lanyards. Featuring impact resistant nylon housings, long-wearing Dyneema® web and housing swivel-eyes to reduce lifeline twisting.

All DuraTech® Mini SRLs include internal locking pawls and external energy absorbers for deceleration in the event of a fall. Available in single and twin-leg configurations for 100% tie-off with multiple alloy steel and forged aluminum alloy anchorage and harness-end connector options. DuraTech® Mini's may be anchored up to 5' below the dorsal D-ring for user's weighing up to 310 lbs. max.

72706TB3 | DuraTech® Mini 6' SRL

Twin-leg, Steel

Tie-off up to 5' below D-ring
Transverse Load rated rebar hooks



72706TH5 | DuraTech® Mini 6' SRL

Twin-leg, Aluminum

Tie-off up to 5' below D-ring
Transverse Load rated rebar hooks



Lifeline Connectors

Housing Connectors	1 - Steel Snap Hook	2 - Steel Swivel Snap Hook	3 - Steel Rebar Hook	4 - Aluminum Snap Hook	5 - Aluminum Rebar Hook	6 - Aluminum Carabiner
B - Steel Carabiner/Clip	72706TB1	72706TB2	72706TB3	72706TB4	72706TB5	72706TB6
H - Dorsal SRL Connector	-	-	72706TH3	-	72706TH5	-

Housing and Lifeline Connectors



72706SB1 | DuraTech® Mini 6' SRL

Single-leg, Steel

Tie-off up to 5' below D-ring



72706SG5 | DuraTech® Mini 6' SRL

Single-leg, Aluminum

Tie-off up to 5' below D-ring
Transverse Load rated rebar hook



Housing Connectors	Lifeline Connectors					
	1 - Steel Snap Hook	2 - Steel Swivel Snap Hook	3 - Steel Rebar Hook	4 - Aluminum Snap Hook	5 - Aluminum Rebar Hook	6 - Aluminum Carabiner
A - Swivel-eye only	72706SA1	-	72706SA3	72706SA4	72706SA5	72706SA6
B - Steel Carabiner	72706SB1	72706SB2	72706SB3	72706SB4	72706SB5	-
G - Aluminum Carabiner	-	-	-	-	72706SG5	72706SG6

Housing and Lifeline Connectors



WrapTech®

WrapTech® 9' Tie-back SRLs provide wrap-around anchorage connection and accordingly, eliminate the need for a separate anchorage connector. Featuring impact resistant nylon housings, housing swivel-eyes to reduce lifeline twisting and tie-back abrasion resistant jacketed Dyneema® web.

All WrapTech® SRLs include 5,000 lb. Tie-back lifeline connectors, internal locking pawls and external energy absorbers for deceleration in the event of a fall. Available in single and twin-leg configurations with selections of alloy steel and forged aluminum alloy harness-end connectors. WrapTech® Tie-back SRLs may be anchored from 2' to 5' below the dorsal D-ring depending on the anchorage diameter for user's weighing up to 310 lbs. max.

74709SB8 | WrapTech® 9' Tie-back SRL

Single-leg, Steel

Tie-off between 2' and 5' below D-ring



74709TB8 | WrapTech® 9' Tie-back SRL

Twin-leg, Steel

Tie-off between 2' and 5' below D-ring



SRL Type	Lifeline Connectors	
	Housing Connectors	B - Tie-back Carabiner
Single-leg	A - Swivel-eye only	74709SA8
Single-leg	B - Steel Carabiner	74709SB8
Single-leg	G - Aluminum Carabiner	74709SG8
Twin-leg	B - Steel Carabiner/Clip	74709TB8

Housing and Lifeline Connectors



DuraTech®

DuraTech® 6' SRLs provide enduring performance with uncompromised durability. Internal inertial brakes and locking pawls produce smooth deceleration and stopping action in a fall event. The absence of external energy absorbers on DuraTech 6' SRLs means reduced minimum required fall clearances for the user and therefore a wider range of work locations may apply. Glass-reinforced housings with TPR overmold provide unmatched impact resistance and aluminum housing swivel-eyes help prevent lifeline twisting. The Dyneema® web lifeline resists abrasion and includes a visual fall event indicator. DuraTech® 6' SRLs are available in single and twin-leg configurations with multiple alloy steel and forged aluminum alloy connectors, and may be anchored up to 2' below the dorsal D-ring for user's weighing up to 310 lbs. max.

82706SB1 | DuraTech® 6' Web SRL



82706TB3 | DuraTech® 6' Web SRL



Lifeline Connectors

Housing Connectors	1 - Steel Snap Hook	2 - Steel Swivel Snap Hook	3 - Steel Rebar Hook	4 - Aluminum Snap Hook	5 - Aluminum Rebar Hook	6 - Aluminum Carabiner
A - Swivel-eye only	82706SA1	-	82706SA3	82706SA4	82706SA5	82706SA6
B - Steel Carabiner	82706SB1	82706SB2	82706SB3	82706SB4	82706SB5	82706SB6
G - Aluminum Carabiner	-	-	-	-	82706SG5	82706SG6
B - Steel Carabiner/Clip	82706TB1	82706TB2	82706TB3	82706TB4	82706TB5	82706TB6

Housing and Lifeline Connectors



DuraTech® Max

DuraTech® 9' Max SRLs provide unmatched versatility through their maximum user weight capacity and working length. Internal inertial brakes and locking pawls combined with the external energy absorbers deliver unequalled fall arrest performance. This unique braking deceleration pairing allows 9' Max SRLs to be anchored up to 5' below the dorsal D-ring for users weighing up to 425 lbs. max. for compliance within OSHA regulations.

Glass-reinforced housings with TPR overmold provide unmatched impact resistance and aluminum swivel-eyes help prevent lifeline twisting. The Dyneema® web lifeline resists abrasion and includes a visual fall event indicator. DuraTech® Max SRLs are available in single and twin-leg configurations with multiple alloy steel and forged aluminum alloy connectors.

82709SA1 | DuraTech® Max 9' Web SRL



82709TB5 | DuraTech® Max 9' Web SRL



Lifeline Connectors

Housing Connectors	1 - Steel Snap Hook	3 - Steel Rebar Hook	4 - Aluminum Snap Hook	5 - Aluminum Rebar Hook
A - Swivel-eye only	82709SA1	82709SA3	82709SA4	82709SA5
B - Steel Carabiner/Clip	82709TB1	82709TB3	82709TB4	82709TB5

Housing and Lifeline Connectors



DuraTech®

DuraTech® 10' web and 9' cable SRLs bring the same dependable overhead performance as larger units and provide excellent user mobility for the most demanding jobs. All are equipped with internal inertial brakes and locking pawls to support smooth deceleration and positive stopping action. Also featuring glass-reinforced housings and aluminum swivel-eyes to help prevent lifeline twisting.

DuraTech® 10' web SRLs feature abrasion resistant Dyneema® web and are available with multiple alloy steel and forged aluminum alloy connectors. DuraTech® 9' cable SRLs feature a side-outlet housing design to reduce wear on the cable and orifice with configurations offered in 3/16" galvanized and stainless steel cable matched with alloy and stainless steel load-indicating swivel connectors.

82710SC1 | DuraTech® 10' Web SRL

Single-leg, Steel



83709SB7 | DuraTech® 9' Cable SRL

Single-leg, Steel



DuraTech® Arc Flash

All DuraTech® Arc Flash Mini 6', Max 9' and 11' SRLs have been tested and meet ASTM F887-13 for self retracting lifelines to meet the challenges of electrically charged work environments.

DuraTech® Arc Flash Mini 6' and 9' Max SRLs feature 3/4" Kevlar® web with Nomex® covered external energy absorbers and are available in single and twin-leg configurations with multiple alloy steel and forged aluminum alloy anchorage and harness-end connector options. Arc Flash Mini 6' and Max 9' SRLs may both be anchored up to 5' below the dorsal D-ring and while Mini 6' SRLs have a user capacity of 310 lbs., the Max 9' SRLs can support users weighing up to 425 lbs. under OSHA regulations.

DuraTech® Arc Flash 11' SRLs provide lasting overhead performance with 3/4" Kevlar® web, internal inertial brakes and glass-reinforced housings.

72906TB3 | Arc Flash 6' Mini SRL

Twin-leg, Steel



Tie-off up to 5' below D-ring
Transverse Load rated rebar hooks

82909TB5 | Arc Flash 9' Max SRL

Twin-leg, Aluminum



Tie-off up to 5' below D-ring
Transverse Load rated rebar hooks

82911SC1 | Arc Flash 11' SRL

Single-leg, Steel



Tie-off up to 5' below D-ring

Housing Connectors	Lifeline Connectors - 10' Web				Lifeline Connectors - 9' Cable	
	1 - Steel Snap Hook	3 - Steel Rebar Hook	4 - Aluminum Snap Hook	5 - Aluminum Rebar Hook	7 - Steel Load-indicating Swivel Snap	9 - Stainless Steel Load-indicating Swivel Snap
A - Swivel-eye only	872710SA1	-	872710SA4	-	83709SA7	-
B - Steel Carabiner	872710SC1	872710SC3	-	-	83709SB7	-
G - Aluminum Carabiner	-	-	82710SG4	82710SG5	-	83809SG9

Housing and Lifeline Connectors



Arc Flash SRL	Housing Connectors	Lifeline Connectors			
		1 - Steel Snap Hook	3 - Steel Rebar Hook	5 - Aluminum Rebar Hook	6 - Aluminum Carabiner
6' Mini	C - Steel Carabiner	72906SC1	72906SC3	72906SC5	72906SC6
	B - Steel Carabiner/Clip	72906TB1	72906TB3	72906TB5	72906TB6
9' Max	C - Steel Carabiner	82909SC1	82909SC3	82909SC5	82909SC6
	B - Steel Carabiner/Clip	82909TB1	82909TB3	82909TB5	82909TB6
DuraTech® 11'	C - Steel Carabiner	82911SC1	82911SC3	-	-
	G - Aluminum Carabiner	-	-	82911SG5	82911SG6

Housing and Lifeline Connectors



Rescue

FallTech's UniDrive Rescue and Descent device provides users with the most functional and efficient operation available for use in installation and maintenance of cell towers, construction cranes, wind energy turbines and in many other elevated commercial work locations. Delivering not only self and assisted rescue and controlled descent solutions, the UniDrive also provides vertical work lifting capabilities where others do not. The UniDrive device is designed for both overhead anchoring and personal sternal attachment for self and assisted rescue operations and provides the user with three lifting modes; the manually operated handwheel, a telescoping ratchet handle and a power drill adapter are all standard equipment. Available in prepacked user kits with 150' and 300' lifelines.

6814150K | Rescue and Descent Kit

Self and Assisted Rescue



Rescue and Descent Kits include: UniDrive device, 150' or 300' lifeline, 3 aluminum carabiners, telescoping ratchet lifting handle, drill adapter, 6' pass-through choker sling anchor and 28" weather resistant backpack storage bag.

Part#	Length	Package
6814150K	150'	Standard Rescue and Descent Kit
6814300K	300'	

6813150K | Crane Rescue and Descent Kit

Self and Assisted Rescue



Crane Rescue and Descent Kits feature all of the same contents as our standard kits except in place of the storage bag, our Crane Kits feature a prepacked 8 gallon sealed barrel with security tag to limit equipment inspection audit costs.

Part#	Length	Package
6813150K	150'	Crane Rescue and Descent Kit
6813300K	300'	

68030T | Rescue Pole Set

Aluminum



Telescoping aluminum Rescue Pole extends rescuer's reach from 4' up to 17' to engage a fallen victim. Includes aluminum alloy carabiner, storage bag and spring steel capture clip.

68040B | Rope Clamp Adjuster

Steel



Optional-use Rope Clamp attaches to lifeline for creating a temporary connection point between the trailing-end connector and the actual descent length. Includes tethered aluminum carabiner.

68035EP | Edge Protector

Stainless Steel



Edge Protector features stainless steel plate and guides with 5' wire tether and aluminum carabiner for rope lifeline protection over abrasive edges.



CONFINED SPACE

Confined spaces can be found on many job sites and in nearly every industry where workers come into contact with at least one during the course of their work. Having restricted or limited means of entry and egress, confined spaces are by nature, not designed for continuous occupancy and therefore present a wide range of hazardous conditions to the worker. Commonly used to raise and lower personnel in confined vertical work spaces, davit and tripod systems are essential components of any Confined Space Entry and Retrieval plan. For these reasons, our provision toward mitigating these hazards offers a variety of durable, portable and reliable davit and tripod solutions for safe planning, entry, egress and retrieval.

Portable Davit Systems




| Complete Systems



| Vehicle Hitch Base




| Offset Mast



| Accessories

Fixed Davit Bases



| Center Mount



| Flush Mount



| Floor Mount



| Wall Mount

Tripod Entry Systems



| Complete Systems



| Tripods



| Leg Brackets



| Accessories

Confined Space Devices



| 3-way SRL-R



| Personnel Winch



| Materials Winch




| Accessories

THE RIGHT EQUIPMENT FOR THE JOB

CONFINED SPACE DAVIT SYSTEMS

FallTech® 5pc. Davit Systems are an essential part of a confined space entry and rescue retrieval plan and accordingly are offered in preferred combinations with and without mechanical devices. Designed for vertical entry in temporary applications, our davit systems are lightweight and decidedly portable for trouble-free movement to varied access locations as required. FallTech® 5pc. systems are built for demanding performance with powder coated aluminum offset davit arms, mast extensions and adjustable bases plus all include a host of standard features including primary and secondary pulleys, multiple anchor points and fully adjustable base width, leg and mast height and offset arm reach.

FEATURES

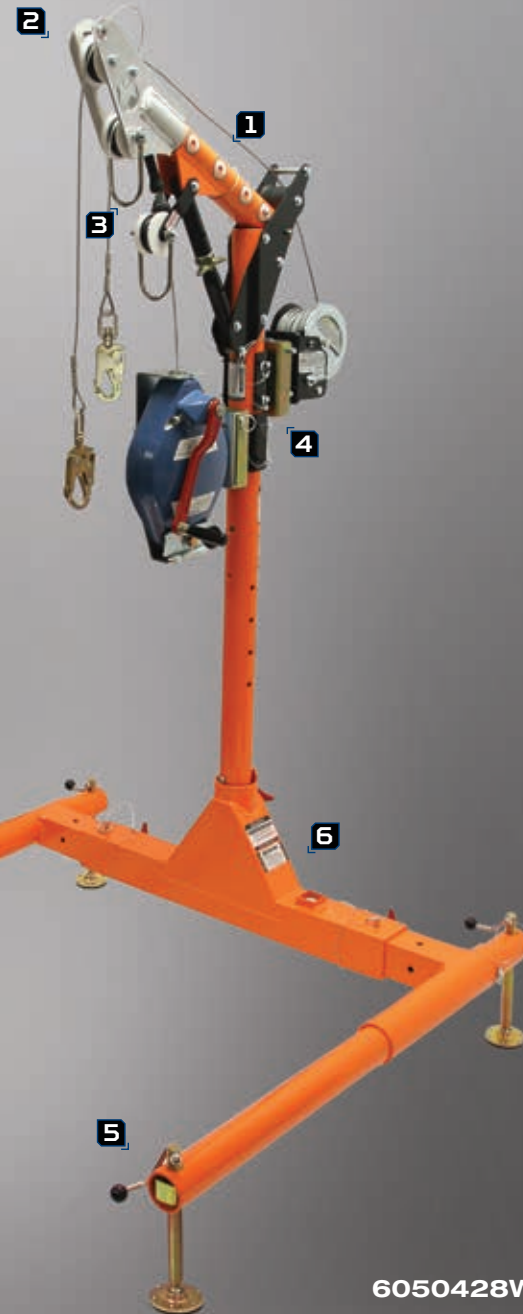


1 Telescoping adjustment from 12" to 29".



2 Primary and secondary pulleys.




3 Integral secondary anchor point with 5,000 lbs. rated strength.



4 Mast-mounted device Receiver Bracket.



5 Adjustable legs with orbiting foot pads.



6 Adjustable base with multiple presets.

6050428WR | 5pc. System with Winch and SRL-R

6050428WR | 5pc. Davit System

60' Winch and SRL-R



Portable system features offset davit arm, 3pc. base and 33" lower mast extension. Offset davit arm adjusts from 12" to 29" and base width adjusts from 38" to 65". Includes 60' 3-way SRL-R and Personnel Winch with galvanized steel cable. Also includes mast-mounted device receiver brackets for FallTech® devices.

6050228W | 5pc. Davit System

60' Winch



Portable system features offset davit arm, 3pc. base, 33" lower mast extension and 60' Personnel Winch with galvanized steel cable and mast-mounted receiver bracket.

6050328R | 5pc. Davit System

60' SRL-R



Portable system features offset davit arm, 3pc. base, 33" lower mast extension and 60' SRL-R with galvanized steel cable and mast-mounted receiver bracket.

6050128 | 5pc. Davit System

User-supplied Devices



Portable system features offset davit arm, 3pc. base, 33" lower mast extension and mast-mounted receiver bracket. Requires user-supplied retrieval devices.

6500128 | Offset Davit Arm

Adjustable Reach



Provides telescoping adjustable reach from 12" to 29", features primary and secondary pulleys for use with multiple devices, secondary anchor point for fall arrest and, receiver bracket for Winch and SRL-R devices.

6500433 | 33" Lower Mast

Extension




Provides user with the ability to quickly change the overall mast height of their system and is compatible with Offset Davit Arm and multiple portable and fixed bases.

- 6500321:** 21" Mast Extension.
- 6500545:** 45" Mast Extension.
- 6500657:** 57" Mast Extension.

6501528 | 3pc. Vehicle Hitch Base

Adjustable Height

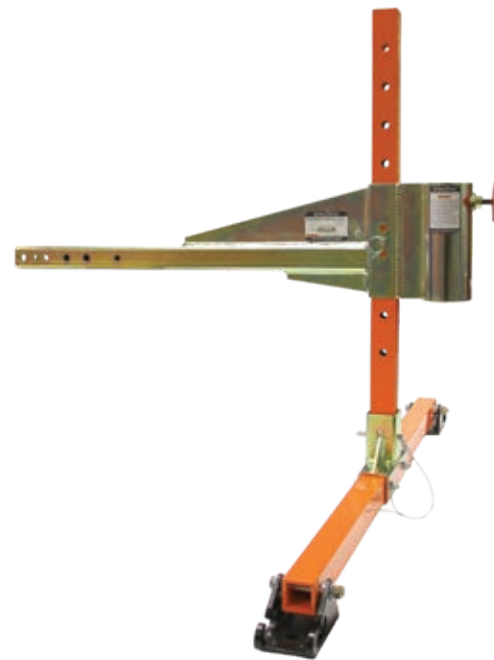

Installs to Class 3 minimum hitch with 2" square receiver, provides height adjustment range of 11" to 36" for use with 12" to 29" Offset Davit Arm and requires no tools for set-up.

- 65130VH:** Vertical Post.
- 65135VH:** Sleeve Arm.
- 6512028VH:** Foot Bar.

6500728 | 3pc. Portable Davit Base


Adjustable Width



Portable base provides width adjustment from 38" to 65", features integrated bullseye level and adjustable height legs for use with 12" to 29" Offset Davit Arm and requires no tools for set-up.

65101DU | Mast Receiver Bracket

Winch and SRL-R



For use with Winch and SRL-R on Confined Space Davits, bracket enjoin retrieval devices to Davit Arm and Mast Extensions.

65102DR | Device Bracket


3-Way SRL-R



For use with 7281D-series 3-way SRL-R's to enjoin devices to Receiver Bracket.

65020BFZ | Bolt-in Flush-mount

Zinc Plated Steel

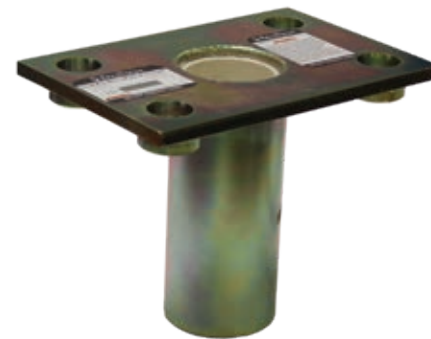

For use in existing concrete or steel structures, zinc plated steel with PVC sleeve insert, flush floor profile is ideal for high traffic areas and reduces tripping hazards, base also available in stainless steel.

65020BFS: Stainless Steel.

65030CFS | Cast-in Flush-mount

Stainless Steel




For use in new construction concrete, stainless steel with PVC sleeve insert, flush floor profile is ideal for high traffic areas and reduces tripping hazards, base also available in zinc plated steel.

65030CFZ: Zinc Plated.

65040CMZ | Bolt-on Center-mount

Zinc Plated Steel

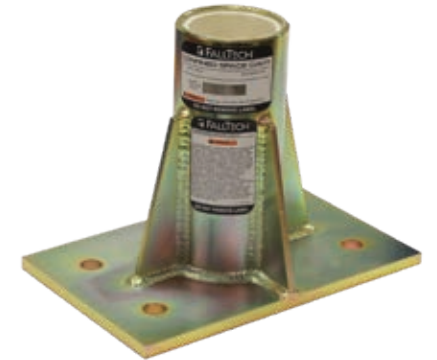

For use in existing concrete or steel structures, zinc plated steel with PVC sleeve insert, base also available in stainless steel.

65040CMS: Stainless Steel

65050CRS | Slip-in Core-mount

Stainless Steel



For use in existing 4" core hole in concrete or steel structures, stainless steel with PVC sleeve insert, base also available in zinc plated steel.

65050CRZ: Zinc Plated.

65060FMZ | Bolt-on Floor-mount

Zinc Plated Steel



For use in existing concrete or steel structures, zinc plated steel with PVC sleeve insert, base also available in stainless steel.

65060FMS: Stainless Steel.

65070WMS | Bolt-on Wall-mount

Stainless Steel



For use on existing vertical concrete or steel structures, stainless steel with PVC sleeve insert, base also available in zinc plated steel.

65070WMZ: Zinc Plated.

Base Caps: **65080SCS** - Stainless Steel and **65080SCZ** - Zinc Plated Steel also available for flush-mount and core-mount bases.

7509 | 8' Tripod / SRL-R and Winch

Aluminum



Features 60' galvanized cable SRL-R and Personnel Winch, includes tripod storage bag plus storage bag and leg bracket for each device. Also available with stainless steel cable. (see table for all 8' Tripod kit configurations).

7509S: Kit with Stainless Steel cable.

7504 | 11' Tripod Kit / SRL-R and Winch

Aluminum



Features 60' galvanized cable SRL-R and Personnel Winch, includes tripod storage bag plus storage bag and leg bracket for each device. Also available with stainless steel cable. (see table for all 11' Tripod kit configurations).

7504S: Kit with Stainless Steel cable.

7276 | 8' Adjustable Tripod

Aluminum



Extruded aluminum 2-stage adjustable legs provide 5' to 8' working height, includes two head-mounted pulleys and two anchoring auxiliary eyebolts, leg-securing safety chain and steel feet with non-slip pads. Offers 55" to 91" internal working height and includes 70" storage bag.

8' Tripod Kit Contents

Kit #	Cable	SRL-R	Winch
7509	Galvanized	7281	7297
7508	Galvanized	7281	-
7507	Galvanized	-	7297
7509S	Stainless Steel	7281S	7297S
7508S	Stainless Steel	7281S	-
7507S	Stainless Steel	-	7297S

7275 | 11' Adjustable Tripod

Aluminum



Extruded aluminum 2-stage adjustable legs provide 6' to 11' working height, head-mounted pulley and two auxiliary head-plate connecting eyes, leg-securing safety chain and aluminum feet with non-slip pads. Offers 67" to 118" internal working height and includes 80" storage bag.

11' Tripod Kit Contents

Kit #	Cable	SRL-R	Winch
7504	Galvanized	7281	7297
7500	Galvanized	7281	-
7505	Galvanized	-	7297
7504S	Stainless Steel	7281S	7297S
7500S	Stainless Steel	7281S	-
7505S	Stainless Steel	-	7297S

7281 | 60' SRL-R

Tripod Mount



Dual-function SRL-R with 10' per minute raising/lowering speed, 3/16" galvanized steel cable lifeline with load-indicating swivel snap hook, aluminum housing and internal drum and steel gears, integral mounting bracket for attachment to tripod leg receiver bracket and includes 20" storage bag.

7281S: 60' stainless steel cable.

7281DG | 60' SRL-R

Davit Mount



Dual-function SRL-R with 10' raising/lowering speed, 3/16" galvanized steel cable lifeline with load-indicating swivel snap hook, aluminum housing and internal drum and steel gears, integral mounting bracket for attachment to davit mast receiver bracket and includes 20" storage bag.

7281DS: 60' stainless steel cable.

7297 | 60' Winch

Personnel



Manually operated Personnel Winch for confined space entry and retrieval, with 3/16" galvanized steel cable lifeline with swivel snap hook, secondary braking system for redundancy, 5:1 gear ratio mechanical advantage with 12' per minute average lifting speed, integral mounting bracket for attachment to tripod and davit mast receiver brackets, folding handle for easy storage and includes 20" storage bag. Meets ANSI Z359.4-2013

7297S: 60' stainless steel cable.
7298: 120' galvanized cable.
7298S: 120' stainless steel cable.

7293M | 60' Winch

Materials



Manually operated mechanical Winch for raising and lowering materials, with 3/16" galvanized steel cable lifeline with swivel snap hook, single internal brake and alloy steel drive and drum gears, 5:1 gear ratio mechanical advantage with 12' per minute average lifting speed, integral mounting bracket for attachment to tripod and davit mast receiver brackets, folding handle for easy storage and includes 20" storage bag.

7295M: 120' galvanized steel cable.

7291A | Device Bracket

11' Tripod



Leg-mount for use with 7275 round tripod legs, includes device-securing detent pin and installation bolts.

7291B | Device Bracket

8' Tripod



Leg-mount for use with 7276 square tripod legs, includes device-securing detent pin and installation bolts.

7286B | SRL-R Bracket

Plated Steel



Replacement bracket for 7281-series SRL-Rs, compatible with 7291A and 7291B receiver brackets.

NL7280 | Storage Bag

Tripod



80" weather-resistant reinforced nylon with carry handles for 7275 Tripod.

NL7281: 70" storage bag for 7276 tripod.

NL7282 | Storage Bag

Devices



20" weather-resistant reinforced nylon

Also available: 7421: Auxiliary Pulley 8208: Personnel Retrieval Yoke

HORIZONTAL LIFELINES

Temporary horizontal lifeline systems provide uniquely adjustable anchorage solutions for mobile users and support varied work site applications with changing fall clearance requirements. Available in synthetic rope and steel cable constituents for 2 to 4 users in various preferred lengths, with and without end-point anchorage connectors.

Synthetic Lifelines



| 2-person Nylon Kernmantle



| 4-person Double-braid polyester

Steel Cable Lifelines and Components



| Cable Systems



| Energy Absorber



| Tension Indicator


Steelgrip® I-Beam Components



| I-beam Stanchion



| Adjustable Clamps



| Base Assembly



| Pass-through bracket

HEIGHT SAFETY WITHOUT COMPROMISE

TEMPORARY HORIZONTAL LIFELINE SYSTEMS

Providing continuous anchorage solutions for mobile users working along horizontal surfaces, FallTech® offers synthetic rope and steel cable horizontal lifeline system options that are not only adjustable in length and simple to install, they also meet the varied fall clearance conditions for construction and general industry applications alike. All systems are designed for temporary use and deliver high strength durability, reliable performance and flexible portability.

FEATURES



1 Clamp and wing nut installation.




2 Intermediate stanchion pass-through bracket.



3 Integral welded carry handle.



4 Stainless steel coil energy absorber.



5 Cable lifeline tension indicator.



6038012 | SteelGrip® 80' Cable HLL System

SYNTHETIC LIFELINES // TEMPORARY HORIZONTAL SYSTEMS

FallTech® Synthetic Horizontal Lifelines provide a flexible, lightweight and adjustable anchorage solution offering quick installation and portability for users working in the absence of individual anchorages along a horizontal surface. FallTech® synthetic lifeline systems are made available in various adjustable lengths from 30' to 100', for 2 to 4 users and are designed for temporary use in most construction and general industry jobsite conditions.

77602K | 2-person HLL System

Temporary



60' temporary system for up to two users features 11/16" solid-core nylon kernmantle rope with 12,000 lbs static strength. Complete system includes lifeline, tensioner, energy absorber and storage bag with two each carabiners, connecting rings and 6' pass-through choker anchors.

- 77302K: 30' kernmantle HLL System.
- 771002K: 100' kernmantle HLL System.

770006 | 2-person HLL System

Temporary



60' temporary system for up to two users features 5/8" 12-strand hollow-core braided polyester rope with low stretch and high abrasion and snag resistance and boasts 15,000 lbs. static strength. Complete system kit includes lifeline, tensioner, and storage bag with two each carabiners, connecting rings and 6' pass-through choker anchors.

- 770003: 30' hollow-core HLL System.
- 770001: 100' hollow-core HLL System.

777075 | 4-person HLL System

Temporary



75' temporary system for up to four users features 5/8" double-braided solid-core polyester rope with 9,500 lbs. static strength. Complete system kit includes lifeline, tensioner and storage bag with two carabiners and 6' pass-through choker anchors plus four connecting rings.

- 777030: 30' double-braided HLL System.
- 777050: 50' double-braided HLL System.
- 777100: 100' double-braided HLL System.

ROOFTOP LIFELINES // TEMPORARY HORIZONTAL SYSTEMS

FallTech® Rooftop Horizontal Lifeline Kits provide a lightweight and adjustable span anchorage system for users preferring a continuous length solution along a roof ridge as opposed to installing multiple single anchors. All FallTech® Rooftop systems include a pairing of specialty roof anchor options including dual truss or chain anchors designed for temporary use by 2 to 4 users with 50' and 60' lengths available to fit changing ridge line lengths.

7432602K | Rooftop HLL

Truss Anchors



60' temporary rooftop systems for up to two users featuring 11/16" solid-core nylon kernmantle rope. Complete system kits include lifeline, tensioner, energy absorber and storage bag with carabiners and connecting rings. 7432602K includes 2 Truss Anchors and 7493A602K includes 2 Chain Anchors.

7493A602K | Rooftop HLL

Chain Anchors



7432502 | Rooftop HLL

Truss Anchors



50' temporary rooftop system for up to two users featuring 5/8" 12-strand hollow-core braided polyester rope. Complete system kits include lifeline, tensioner, and storage bag with carabiners and connecting rings. 7432502 includes 2 Truss Anchors and 7493A502 includes 2 Chain Anchors.

7493A502 | Rooftop HLL

Chain Anchors



7432504 | Rooftop HLL

Truss Anchors



50' temporary rooftop system for up to four users featuring 5/8" double-braided solid-core polyester rope. Complete system kits include lifeline, tensioner and storage bag with carabiners connecting rings. 7432504 includes 2 Truss Anchors and 7493A504 includes 2 Chain Anchors.

7493A504 | Rooftop HLL

Chain Anchors




STEEL CABLE LIFELINES // TEMPORARY HORIZONTAL SYSTEMS

FallTech® SteelGrip® Horizontal Lifelines provide an adjustable length and portable anchorage solution for users working in the absence of proper anchorages along a horizontal surface. All SteelGrip® systems are designed for temporary use and are available with end-point anchorage options in various precut lengths for manageable on-site adjustment to match construction jobsite conditions.

6036018 | SteelGrip® 60' Cable HLL

Stanchions

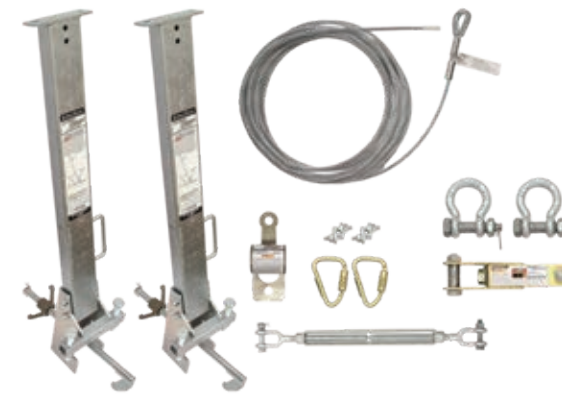

Complete Cable HLL Systems with I-beam Stanchions are offered with 3/8" cable in 30', 60', 80' and 100' lengths with adjustable base clamps to fit beam flanges from 4" to 24" wide. 30' and 60' systems include 1 coil energy absorber, 80' and 100' extended span systems include 2 coil energy absorbers and 3 stanchions and all include our SteelGrip® line tension indicator.

System #	Length	Stanchions	Clamp Width
6033012	30'	2	12"
6036012	60'	2	12"
6038012	80'	3	12"
60310012	100'	3	12"
6033018	30'	2	18"
6036018	60'	2	18"
6038018	80'	3	18"
60310018	100'	3	18"

Systems also available with 24" base clamps in 30' to 100' spans.

60260A | SteelGrip® 60' Cable HLL

Pass-through Chokers



Complete Cable HLL Systems with 3/8" cable available in 30', 60', 80' and 100' lengths including two 6' pass-through chokers for end-point anchorage plus our SteelGrip® line tension indicator.

System #	Length	Absorbers	Anchors
60230A	30'	1	2
60260A	60'	1	2
60280A	80'	2	2
602100A	100'	2	2

620060 | SteelGrip® 60' Cable Assembly



Cable HLL assemblies for use with user-supplied anchorages feature our SteelGrip® line tension indicator and 3/8" cable; lengths longer than 60' include 2 coil energy absorbers. Available in 10' length increments from 30' up to 330'; call for part #s and availability.

System #	Length	Absorbers
620030	30'	1
620060	60'	1
620330	330'	2

62103D | Energy Absorber



62205T | Tension Indicator



62101B | Installation Kit



Multiple additional coil energy absorbers and installation hardware also available separately and in user-preferred combinations.

SteelGrip® I-beam Stanchions deliver the flexibility to configure specific length systems by providing durable end-point and intermediate anchorage for temporary cable horizontal lifelines. Each stanchion features three modular components to securely adapt to your specific configurations as the jobsites change, and for the ease of replacing and supplementing existing components. Post, base and clamp components are available separately and in combinations to fit I-beams from 4" to 24" wide and collectively provide simple installation and low cost of ownership.

603018K | SteelGrip® I-Beam Stanchion



Each complete SteelGrip® Stanchion includes a 42" plated steel post and base plus one of three threaded clamp bar and wing nut combinations of 12", 18" and 24" width capacity to fit various I-beam flanges.

- 603012K:** Stanchion with 12" clamp bar.
- 603018K:** Stanchion with 18" clamp bar.
- 603024K:** Stanchion with 24" clamp bar.

Universal base with clamp bar pairings plus threaded clamp bars with wing nuts are also offered separately for 12", 18" and 24" I-beam flange widths to suit your specific system configurations.

630018C | Clamp Bar Set


18" Clamp Bar



- 630012C:** 12" Stanchion clamp bar.
- 630018C:** 18" Stanchion clamp bar.
- 630024C:** 24" Stanchion clamp bar.

630118CB | Base and Clamp Set

Base with 18" Clamp



- 630112CB:** 12" clamp bar with base.
- 630118CB:** 18" clamp bar with base.
- 630124CB:** 24" clamp bar with base.

630042P | Stanchion Post



In addition to clamp bars and base/clamp sets offered separately (shown above), individual replacement components are also available to supplement specific needs and to support your custom-build system configurations.

630003B | I-Beam Base



630001T | Pass-through Bracket



630002W | Wing Nut



The most effective method of proactively protecting workers from falls is to eliminate the fall hazard, and one of the most effective solutions for eliminating the hazard is with FallTech's portable construction guardrail assembly. The dual-application guardrail assembly is adjustable for parapet wall and slab edge thicknesses from 6½" to 24½" and installs easily with common user-supplied 2 x 4 dimensional lumber. Each assembly features rail brackets for top and mid-rail guards and for toe-boards when used on slab edges. FallTech® temporary construction guardrails are highly portable and provide a cost-effective solution for common construction hazards like wall and floor openings, uncovered holes, roof and elevator openings and unprotected ramps and leading edges.

6040422 | Construction Guardrail Assembly



Guardrail assembly shown in parapet wall application.

Guardrail assembly shown in slab edge application.

For added versatility, we also offer the guardrail assembly components sold separately.

6402ADJ | Guardrail Clamp Base



6401422 | 42" Guardrail Post



6409PC | Post Adapter Sleeve



For use with 7460A Parapet Anchor and 6401422 Post





FallTech® for Tools™ are component products designed to help you hold on to your gear and prevent drop injuries to workers at lower levels. Utilized as a tool tethering system of compatible components, a typical assembly may contain a tool attachment, a tool tether and in some cases a tool anchor. FallTech for Tools™ provides multiple component options in each of these product groups so you can create tethering solutions to fit your tools and your work applications.

Tool Attachments



D-ring attachments are designed for common hand tools without the means for connecting tethers directly and to create secure solutions for tools weighing up to 5 lbs.

Item #	Tape-on Attachments	Max Tool Wt
5306A10	D-ring, ½" x 2½", 10/pk	2 lbs.
5101A10	D-ring, ½" x 3½", 10/pk	2 lbs.
5102A10	D-ring, 1" x 3½", 10/pk	5 lbs.
5302A10	Swivel D-ring, 1" x 3½", 10/pk	5 lbs.

Premium Tool Tape



No-heat tool tape is used to secure D-ring attachments to tools up to 5 lbs.; for use with tool tethers and wrist anchors and available in 15' and 30' rolls.

Item #	No-heat Tool Tape	Max Tool Wt
5307A1	15' x 1" Premium Tool Tape, 1/pk	5 lbs.
5307A10	15' x 1" Premium Tool Tape, 10/pk	5 lbs.
5308A1	30' x 1" Premium Tool Tape, 1/pk	5 lbs.
5308A10	30' x 1" Premium Tool Tape, 10/pk	5 lbs.

Tool Attachments



Choke-on Loop attachments are for connections to hand tools having integral captive-eye holes. Options are available with D-rings and with steel screwgate and aluminum twist-lock carabiners.

Item #	Choke-on Loop Attachments	Max Tool Wt
5303A10	Swivel D-ring, 12", 10/pk	5 lbs.
5309A10	Standard D-ring, 11", 10/pk	5 lbs.
5104A5	Steel Carabiner, 13", 5/pk	5 lbs.
5106A5	Aluminum Carabiner, 13", 5/pk	5 lbs.

Tool Attachments




For larger and heavier hand and power tools with problematic handle sizes, our loop-end attachments utilize combined choke-on and tape-on fastening for tools weighing up to 35 lbs. Tool tape sold separately.

Item #	Choke/Tape-on Attachments	Max Tool Wt
5310A1	Loop-end 13" with support arm 1/pk	35 lbs.
5310A5	Loop-end 13" with support arm 5/pk	35 lbs.

The FallTech® Speed-clip system features multiple compatible components including tool attachments, wrist attachment anchors and tool tethers for creating custom solutions for tools weighing up to 5 lbs.

Speed-clip Attachments

Choke-on/Carabiner

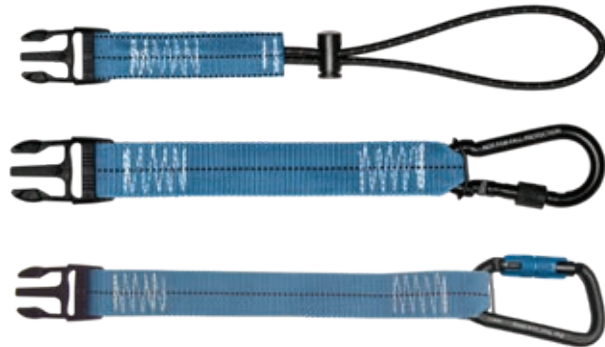

Speed-clip attachments are available with choke-on loops, steel screwgate and aluminum twist-lock carabiners for connection to tools with captive-eye holes. All are 11" in length and may be combined with our Speed-clip tethers or wrist attachment anchor.

Item #	Speed-clip Attachments	Max Tool Wt
5027F	Choke-on Loop, 1"x11", 3/pk	5 lbs.
5027F15	Choke-on Loop, 1"x11", 15/pk	5 lbs.
5105A5	Steel Carabiner, 1"x11" 5/pk	5 lbs.
5107A5	Aluminum Carabiner, 1"x11" 5/pk	5 lbs.

Speed-clip Tool Tethers

Choke-on/Carabiner

Our Speed-clip Tool Tethers are designed for versatility as both stand-alone direct-connect tethers and for compatibility within our Speed-clip system in creating solutions to meet your specific needs. Available with elastic choke-on loops and options with steel screwgate and aluminum twist-lock carabiners for tools weighing up to 5 lbs.

Item #	Speed-clip Stretch Web Tool Tethers	Max Tool Wt
5027E	Choke-on loop, Steel Carabiner, 1/pk	5 lbs.
5032A	Choke-on loop, Aluminum Carabiner, 1/pk	5 lbs.



Wrist Attachment Anchor

Speed-clip/D-ring



For interchangeable solutions commonly needed in close proximity work, our Wrist Attachment Anchor features a speed-clip receiver and a steel D-ring to provide multi-function adjustable attachment for speed-clips, carabiners and choke-on loops. Flexible neoprene and elastic with UniFit sizing for tools weighing up to 5 lbs.

Item #	Wrist Attachment Anchor	Max Tool Wt
5331A1	Speed-clip and D-ring, UniFit, 1/pk	5 lbs.
5331A5	Speed-clip and D-ring, UniFit, 5/pk	5 lbs.

Hard Hat Tethers

Stretch Coil/Stretch Web



Specifically designed for securing hard hats, two user-preferred options are available to protect against the drop. Our stretch coil tether features a choke-on loop and snap-clip combination and the stretch web version includes an adjuster paired with a snap-buckle.


Item #	Hard Hat Tethers	Max Wt
5329A5	Stretch Coil 18" Cinch-loop/Snap-clip 5/pk	2 lbs.
5329A25	Stretch Coil 18" Cinch-loop/Snap-clip 25/pk	2 lbs.
5330A5	Stretch Web 25" Adjuster/Snap-buckle 5/pk	2 lbs.
5330A25	Stretch Web 25" Adjuster/Snap-buckle 25/pk	2 lbs.

Tool Tethers

Stretch Web

FallTech® Tool Tethers are the critical link for safely connecting users and their tools and are available in preferred configurations to suit most applications up to 15 lb. max. tool weight. All are constructed with woven elastic web and feature either choke-on loops paired with steel screwgate or aluminum twist-lock carabiner options or for added functionality, tethers are also available in dual-carabiner models.

Item #	Stretch-web Tool Tethers	Max Tool Wt
5029B	Choke-on Loop, Steel Carabiner 1/pk	15 lbs.
5029B10	Choke-on Loop, Steel Carabiner 10/pk	15 lbs.
5030A	Choke-on Loop, Aluminum Carabiner 1/pk	15 lbs.
5030A10	Choke-on Loop, Aluminum Carabiner 10/pk	15 lbs.
5029C	Dual Steel Carabiners, 1/pk	15 lbs.
5031A	Dual Aluminum Carabiners, 1/pk	15 lbs.

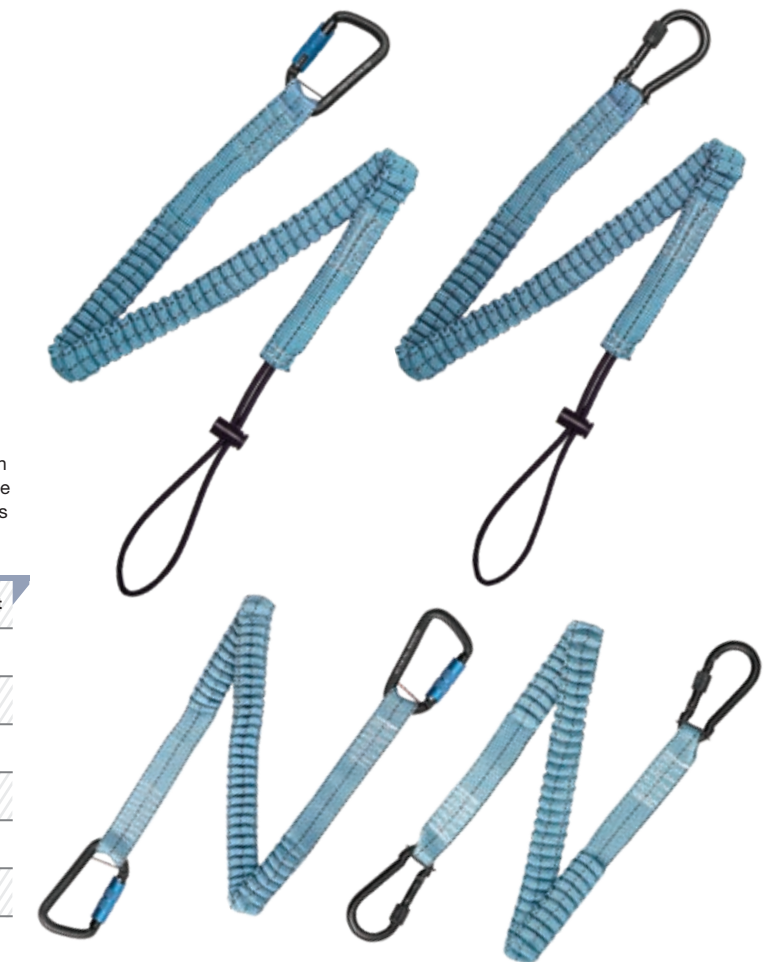

Tool Tethers

Stretch Cord



Our original Tool Tether is constructed with tubular webbing and internal stretch cord and features a choke-on loop with our basic self-closing steel carabiner for tools weighing up to 5 lbs. max.

Item #	Stretch-web Tool Tethers	Max Tool Wt
5027B	Choke-on Loop, Basic Steel Carabiner 1/pk	5 lbs.
5027B10	Choke-on Loop, Basic Steel Carabiner 10/pk	5 lbs.

**8595A** | Roofer's Kit**Premium**

FallTech's Premium Roofer's Kit is a complete Personal Fall Arrest System with value-added components not commonly included in similar solution kits. Among these are the harness with tongue buckle legs, the vertical lifeline with steel thimble and the rope adjuster grab featuring user trailing mobility.

Also available: 8595RA: with 18" Gear Bag 9103JK: 6' choker substituted for hinged anchor

Includes:

**8596A** | Roofer's Kit**Anti-Panic**

Premium Roofer's Kit with the highest level of compliance, this pre-pack includes all the value-added components found in our 8595A kit plus, an integrated Anti-panic Trailing and Hinged Fall Arrester grab to meet ANSI Z359.15-2014.

Includes:

**8593A** | Roofer's Kit**Serviceable**

Complete Personal Fall Arrest Kit for roofing applications contains modestly priced components with economical functionality including mating buckle harness, construction-grade vertical lifeline and manually operated rope adjuster grab.

Also available: 8592A Economy Kit with 7444 single-use anchor

Includes:



FallTech® User Kits provide you with user-based solutions by prepacking our most accepted harnesses and lanyards in convenient pairings to address the most common Fall Arrest needs. Kits include Contractor and FT Basic® harness options with single-leg Internal-series lanyards combined in a mini storage bucket or with a gear storage bag.

9505Z | Mini Bucket User Kit

Tongue Buckle



Convenient storage bucket contains 7016 single D-ring Contractor harness with Tongue Buckle legs and 8259 6' Internal Energy Absorbing lanyard.

9500Z | Mini Bucket User Kit

Mating Buckle



Convenient storage bucket contains 7015 single D-ring Contractor harness with Mating Buckle legs and 8259 6' Internal Energy Absorbing lanyard.

Also available: 9504Z Kit with 7007 FT Basic® Harness

9001HS | Gear Bag User Kit

Tongue Buckle



Prepacked assembly features 7016 single D-ring Contractor harness with Tongue Buckle legs, 8259 6' Internal Energy Absorbing Lanyard and a gear storage bag.

Also available: 9000FW Kit with 8256 ViewPack® Lanyard

9005PS | Gear Bag User Kit

Mating Buckle



Prepacked kit features 7015 single D-ring Contractor harness with Mating Buckle legs, 8259 6' Internal Energy Absorbing Lanyard and a gear storage bag.

Also available: 9010CP Kit with 7007 FT Basic® Harness

5005P | Gear Bag

Small



Polyester, 11" x 8" x 4"

5006MP | Gear Bag

Medium



Polyester, 16" x 8" x 9"

5007LP | Gear Bag

Large



Polyester, 18" x 9" x 10"

5004WP | Gear Bag

Weather Resistant



17" x 9" x 9"

5026 | Duffle Bag

Drawstring



Polyester, 32" x 12" x 12"

Build your preferred harness/lanyard combinations from our selection of detached components including up to five harness options and four lanyard configurations. Each lanyard features a choke-loop for Dorsal D-ring connection configured with either snap or rebar hooks for anchorage tie-off. Harness options include applications for Fall Arrest and Work Positioning with either mating buckle or tongue buckle legs. (Combination part numbers listed in table below)

7007 | FT Basic®



Single D-ring 3pt harness with Mating Buckle legs.

7015 | Contractor



Single D-ring harness with Mating Buckle legs.

7016 | Contractor



Single D-ring harness with Tongue Buckle legs.

7017 | Contractor



Three D-ring harness with Mating Buckle legs.

7018 | Contractor



Three D-ring harness with Tongue Buckle legs.

8259L | Internal



6' Internal lanyard with choke-loop and snap hook.

8256LTL | Soft Pack



6' Soft Pack lanyard with choke-loop and snap hook

82593L | Internal



6' Internal lanyard with choke-loop and rebar hook.

8259Y3L | Internal



6' Internal lanyard with choke-loop and two rebar hooks.

Part #	Energy Absorbing Lanyard	Full Body Harness
CMB078259L	8259L Single-leg Internal	7007 FT Basic®
CMB0756LTL	8256LTL Single-leg Soft Pack	
CMB158259L	8259L Single-leg Internal	7015 Contractor
CMB168259L	8259L Single-leg Internal	7016 Contractor
CMB1659Y3L	8259Y3L Double-leg Internal	
CMB178259L	8259L Single-leg Internal	7017 Contractor
CMB172593L	82593L Single-leg Internal	
CMB182593L	82593L Single-leg Internal	7018 Contractor
CMB1859Y3L	8259Y3L Double-leg Internal	

18 unique work-safe solutions to suit most user applications are provided in prepacked kits. Contractor and FT Basic® harnesses with one or three D-rings are outfitted with energy absorbing lanyards and gear storage bags. Harnesses feature mating buckle or tongue buckle options, lanyards are available with single or double-legs and snap or rebar hooks and each kit includes a gear storage bag conveniently sized for prepacked contents. (Kit part numbers listed in table below)

7007 | FT Basic®



Single D-ring 3pt harness with Mating Buckle legs.

7015 | Contractor



Single D-ring harness with Mating Buckle legs.

7016 | Contractor



Single D-ring harness with Tongue Buckle legs.

7017 | Contractor



Three D-ring harness with Mating Buckle legs.

7018 | Contractor



Three D-ring harness with Tongue Buckle legs.

8256LT | Soft Pack



6' Single-leg, snap hooks.

8259 | Internal



6' Single-leg, snap hooks.

8259Y | Internal



6' Double-leg, snap hooks.

82593 | Internal



6' Single-leg, rebar hook.

8259Y3 | Internal



6' Double-leg, rebar hooks.

5005P | Small Gear Bag



5006MP | Medium Gear Bag



Part #	Kits with 7007 Harness	Gear Bag
KIT076LT5P	8256LT Soft Pack Lanyard	Small
KIT072595P	8259 Internal Lanyard	
KIT0759Y6P	8259Y Internal Lanyard	Medium

Part #	Kits with 7015 Harness	Gear Bag
KIT156LT5P	8256LT Soft Pack Lanyard	Small
KIT152595P	8259 Internal Lanyard	
KIT155935P	82593 Internal Lanyard	Medium
KIT1559Y6P	8259Y Internal Lanyard	
KIT159Y36P	8259Y3 Internal Lanyard	

Part #	Kits with 7017 Harness	Gear Bag
KIT176LT5P	8256LT Soft Pack Lanyard	Small
KIT172595P	8259 Internal Lanyard	
KIT179Y36P	8259Y3 Internal Lanyard	Medium

Part #	Kits with 7016 Harness	Gear Bag
KIT166LT6P	8256LT Soft Pack Lanyard	Medium
KIT162596P	8259 Internal Lanyard	
KIT1659Y6P	8259Y Internal Lanyard	
KIT165936P	82593 Internal Lanyard	
KIT169Y36P	8259Y3 Internal Lanyard	

Part #	Kits with 7018 Harness	Gear Bag
KIT186LT6P	8256LT Soft Pack Lanyard	Medium
KIT189Y36P	8259Y3 Internal Lanyard	

Discover the full selection of all
our fall protection products at
www.falltech.com



Tel / 323.752.0066

Fax / 323.752.5613

**©2019 Alexander Andrew, Inc
1306 S. Alameda St. Compton,
CA. 90221-4803**

Tools shown not included.

Product description and specifications
herein may change without notice.

U.S. and International Patents Pending.

Part #MC2019

