

CLIMBING EQUIPMENT



#1 PRO LADDER™



## WERNER CLIMBING EQUIPMENT

CLIMBING SOLUTIONS .....	3
CHOOSING THE RIGHT LADDER FOR THE JOB .....	4-5

### FIBERGLASS

STEPLADDERS .....	6-20
LEANSAFE .....	9
STEP STOOLS .....	13-14
PODIUM LADDER .....	18-19
MULTILADDERS .....	20
EXTENSION LADDERS .....	21-29

### ALUMINUM

STEPLADDERS .....	30-35
UTILITY LADDER .....	35
STEP STOOLS .....	36-37
EXTENSION LADDERS .....	38-42
MULTILADDERS .....	44
WORK PLATFORMS .....	45
ATTIC LADDERS .....	46-47
ROLLING SCAFFOLDS .....	48
PLANKS .....	49
PUMP JACKS .....	50
SCAFFOLDING & STAGES .....	52-58

### STEEL

PUMP JACKS .....	51
------------------	----

### ACCESSORIES

LOCK-IN SYSTEM .....	60
STEPLADDER .....	61
EXTENSION LADDER .....	62-67

# LEADING THE WAY IN CLIMBING SOLUTIONS




Once your feet leave the ground, you're in our world. From ladders to fall protection, Werner offers you a full line of climbing equipment that's engineered to provide maximum stability, safety and comfort at every height. Our products are designed to be used anywhere from the home to the most demanding job sites.

We continually strive to improve manufacturing techniques through ongoing testing and facility investment. Recognized for their durability, quality and safety, Werner products are developed based on application, industry research, product testing and customer insight to ensure the highest quality standards that meet the needs of our end users.



**LOCKTOP™**



**EDGE 360®**

Werner remains the market leader today by continually enhancing and improving its product offering. Recently, the Werner 6200 Series Stepladders were redesigned for better performance and productivity, which included an upgraded ladder top and enhanced bracing for overall durability. Our number one professional grade ladder series was upgraded specifically for professional contractors and continues to be a dependable tool on jobsites everywhere.

## PRODUCT CERTIFICATIONS

Werner ladders are manufactured and tested to the strictest quality standards. All Werner ladders meet or exceed American National Standards Institute (ANSI) and Occupational Safety and Health Administration (OSHA) requirements, where applicable.



### OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION CODE

All Type II, I, IA and IAA fiberglass, aluminum and wood ladders, ladder jacks and extension planks meet or exceed code. OSHA CODE applies to ladders used in the workplace. Werner Co. recommends Type II or heavier duty rated ladders for these applications.




### AMERICAN NATIONAL STANDARDS INSTITUTE

#### PRODUCT LINES MEET OR EXCEED ANSI CODE


Fiberglass Ladders .... A14.5 (2017)  
Aluminum Ladders ..... A14.2 (2017)  
Ladder Jacks ..... A10.8 (2019)  
Extension Planks ..... A10.8 (2019)  
Scaffolding ..... A10.8 (2019)  
Stages ..... A10.8 (2019)  
Work Platforms ..... A10.8 (2019)  
Attic Ladders..... A14.9 (2019)  
Ladder Accessories... A14.8 (2013)  
Step Stools ..... A14.11 (2018)

## STEP 1 SELECT HEIGHT (SIZE)

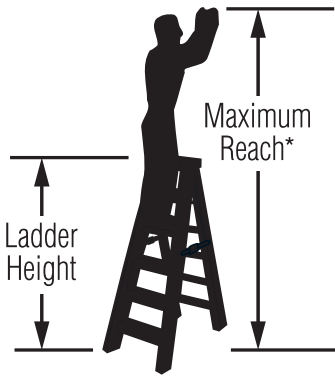


STEPLADDERS	
Ladder Height	Maximum Reach*
4'	8'
6'	10'
7'	11'
8'	12'
10'	14'
12'	16'
14'	18'
16'	20'

### Average Heights

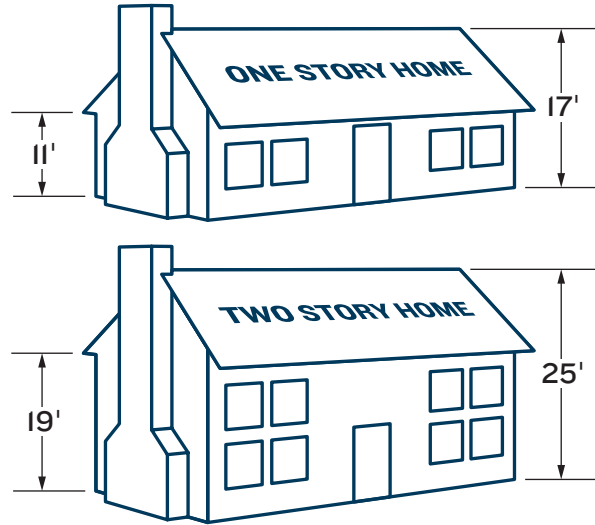


\*Assumes a 5'6" person with a vertical 12" reach.

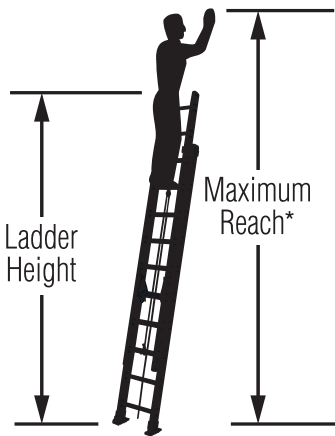

EXTENSION LADDERS		
Ladder Height	Maximum Reach*	Height To Gutter or Top Support Point††
16'	15'	9' max.
20'	19'	9' to 13'
24'	23'	13' to 17'
28'	27'	17' to 21'
32'	31'	21' to 25'
36'	34'	25' to 28'
40'	37'	28' to 31'

†† Support points for extension ladders reflect section overlap, ladder angle, or 3' extension above roof line.

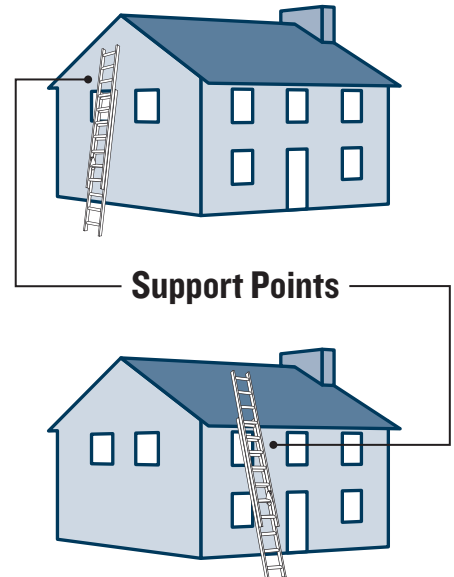

STEP **2** **SELECT PERFORMANCE (DUTY RATING)**



**200-225lb**  
LOAD CAPACITY

LIGHT DUTY BASIC DESIGNS



**250lb**  
LOAD CAPACITY

MEDIUM DUTY INNOVATIVE DESIGNS



**300lb**  
LOAD CAPACITY

HEAVY DUTY RUGGED & DURABLE



**375lb**  
LOAD CAPACITY

COMMERCIAL GRADE MOST DURABLE

STEP **3** **SELECT MATERIAL**



NON CONDUCTIVE FOR WORKING NEAR ELECTRICITY



DESIGNED AND TESTED FOR EXTREME TEMPERATURES



WON'T DENT, SHATTER, RUST OR CORRODE



HIGH VISIBILITY COLOR



NOT FOR USE NEAR ELECTRICITY



DESIGNED AND TESTED FOR EXTREME TEMPERATURES



WON'T DENT, SHATTER, RUST OR CORRODE



## 7400SERIES Stepladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



## T7400SERIES

## Multi-Use Twin Stepladder††

**375lbs.** LOAD CAPACITY PER SIDE

**TYPE IAA**  
DUTY RATING



\* Energy Diffusing Geometry

- Every rivet backed up by metal plate or washer to protect rails

\* Energy Diffusing Geometry

- Every rivet backed up by metal plate or washer to protect rails

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7403	3'	19-3/4"	24-3/8"	2.5	13.5
7404	4'	21-1/2"	30-1/2"	3.5	16.5
7405	5'	23-1/4"	36-3/4"	4.6	20.0
7406	6'	25"	42-7/8"	5.8	23.5
7407	7'	26-3/4"	49"	7.1	28.0
7408	8'	28-1/2"	55-1/4"	8.5	32.0
7410	10'	32"	67-1/2"	11.4	40.5
7412	12'	35-1/2"	79-7/8"	14.8	49.5

### DIMENSIONS

Top:	7-1/4" x 14-7/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

### SPECIFICATIONS

NOTE: Type IAA duty rating is for stepladders up to 12 ft.

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T7404	4'	21-1/2"	36-1/8"	4.5	21.5
T7405	5'	23-1/2"	43-1/8"	5.8	29.0
T7406	6'	25"	50-1/8"	7.3	30.0
T7408	8'	28-1/2"	64-1/8"	10.5	40.5
T7410	10'	32"	78-1/4"	14.2	51.5
T7412	12'	35-1/2"	92-1/4"	18.3	63.5

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

T7414	14'	39"	106-1/4"	22.8	86.0
T7416	16'	42-1/2"	120-1/4"	27.7	103.5
T7418	18'	46"	136-1/8"	33.1	126.0
T7420	20'	49-1/2"	150-1/8"	38.8	149.0

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

### DIMENSIONS

Top:	8-1/4" x 14-1/2"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide

# P7400SERIES Platform Stepladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



- \* Energy Diffusing Geometry
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

**SPECIFICATIONS** NOTE: Type IAA duty rating is for platforms ranging in size from 3' to 8'

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P7403	3'	5'	25-1/4"	35-7/8"	5.1	22.0
P7404	4'	6'	27"	42"	6.4	26.0
P7406	6'	8'	30-1/2"	54-3/8"	9.1	34.0
P7408	8'	10'	34"	66-5/8"	12.2	44.5

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

P7410	10'	12'	37-1/2"	79"	15.6	54.5
P7412	12'	14'	42"	91-1/4"	19.3	68.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


**DIMENSIONS**

Platform:	14-5/8" x 15"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

# PT7400/PT7400-4CSERIES Stockr's Ladder®††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING

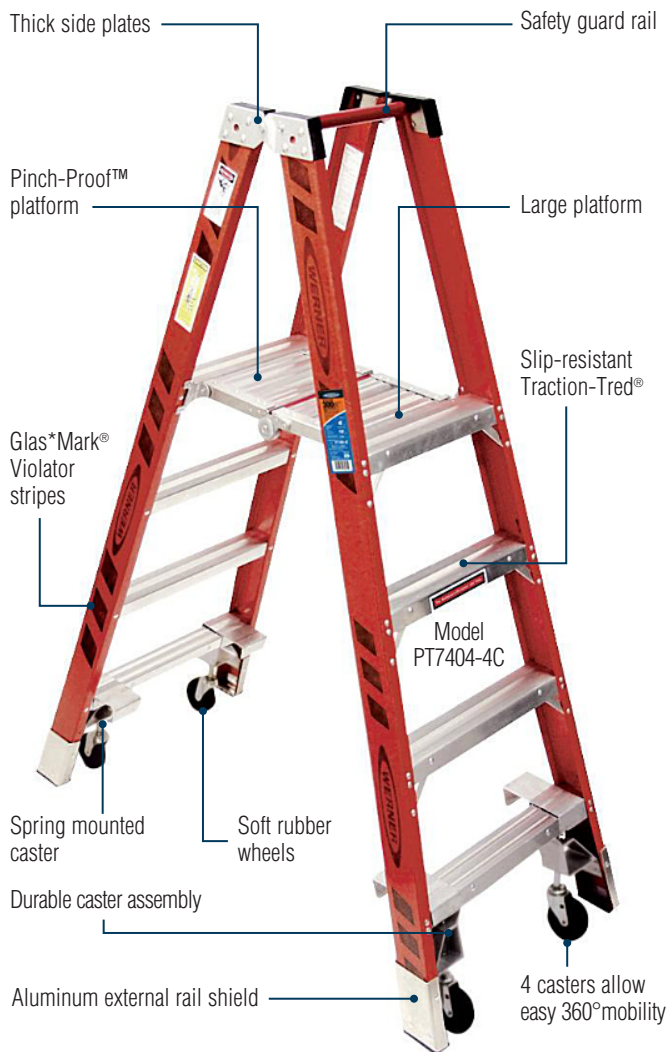

- Easy to handle and folds to a 12" width for storage
- Unique combination of one person, two person†† and platform ladder use
- Internal Pinch-Proof™ aluminum spreaders on 8' and 10' models
- Requires less floor space than heavy steel rolling ladders

**SPECIFICATIONS**

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Casters	Approx. Shipping Wt. Lbs.
PT7404	4'	6'	25-1/4"	50"	8.4	31.0	PT7404-4C	37.0
PT7406	6'	8'	28-3/4"	64"	12.7	41.5	PT7406-4C	53.0
PT7408	8'	10'	32-1/4"	78-1/4"	17.8	54.5	PT7408-4C	60.5
PT7410	10'	12'	35-3/4"	92-1/4"	23.7	66.0	PT7410-4C	72.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


**DIMENSIONS**

Platform:	12-3/4" x 22"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide

## E7400 SERIES Extension Trestle Ladder††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING

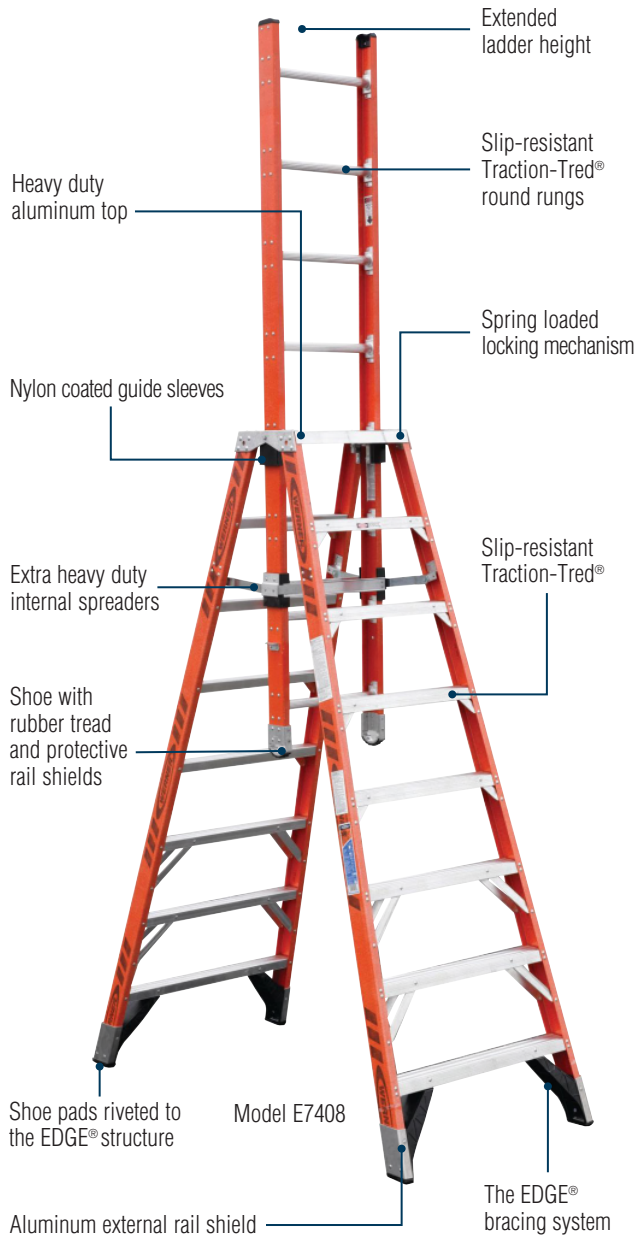

### SPECIFICATIONS

Model No.	Stepladder Size	Base Section Bottom Width	Approx. Spread	Approx. Extended Ladder Height	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
E7408	8'	32-3/4"	67-3/4"	12'	16.6	74.0
E7410	10'	36-1/4"	81-7/8"	15'	22.2	95.5
E7412	12'	39-3/4"	95-7/8"	19'	28.3	113.5
E7414	14'	43-1/4"	109-3/4"	22'	35.1	135.5
E7416	16'	46-3/4"	123-3/4"	26'	42.4	158.0

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

### DIMENSIONS

Extended Ladder		Stepladder	
Rails:	3-3/8" wide	Rails:	3-3/16" wide (8'-12") 3-5/16" wide (14'-16")
Rungs:	1-1/4"	Steps:	3" wide
Flange:	1-3/16" wide	Flange:	1-3/16" wide

## 7300 SERIES Stepladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails

### SPECIFICATIONS

Model No.	Approx. Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Pail Shelf	Approx. Shipping Wt. Lbs.
7303	3'	19-3/4"	23-1/2"	2.5	13.0	7303S	16.5
7304	4'	21-1/2"	29-3/4"	3.5	16.0	7304S	19.5
7305	5'	23-1/4"	35-7/8"	4.6	19.5	7305S	23.0
7306	6'	25"	42"	5.8	22.5	7306S	26.0
7308	8'	28-1/2"	54-3/4"	8.5	31.0	7308S	34.0
7310	10'	32"	66-5/8"	11.4	40.5	7310S	43.5
7312	12'	35-1/2"	79"	14.8	50.0	7312S	53.0

### DIMENSIONS

Top:	7-1/4" x 14-7/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide






## L7300SERIES Leansafe Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

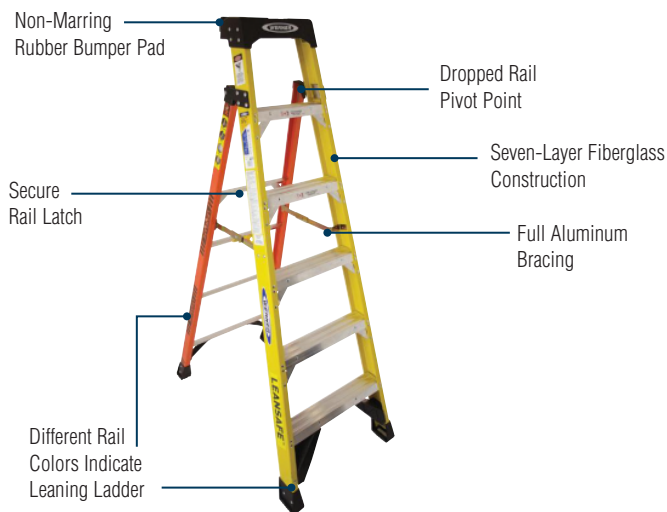

- Designed to lean up against walls, corners and poles
- Non-marring rubber pad protects the wall in leaning mode
- LEANSAFE™ ladder top is designed to secure tools and increase productivity
- Front and rear rail are different color for added visual safety
- Rail latch locks legs together when in leaning mode
- Curved foot pads to maximize surface area when in stepladder and leaning mode

### SPECIFICATIONS


Model No.	Size	Stepladder Mode		Leaning Mode	
		Max. Standing Height	Max. Reach Height	Max. Standing Height	Max. Reach Height
L7304	4'	1'-8"	8'-4"	10'	7'-3"
L7306	6'	3'-10"	10'	2'-10"	9'
L7308	8'	5'-9"	12'	4'-9"	11'
L7310	10'	7'-8"	14'	6'-8"	13'
L7312	12'	9'-7"	16'	8'-7"	15'

\*assumes a 5'-6" person with a vertical 12" reach

## L6200SERIES Leansafe Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

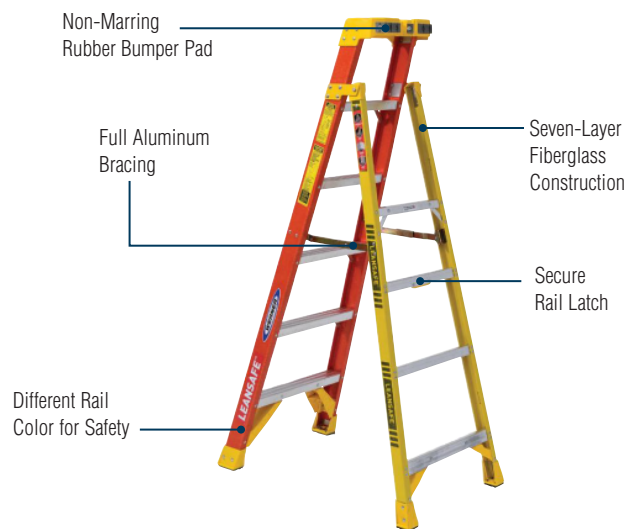

- Designed to lean up against walls, corners and poles
- Non-marring rubber pad protects the wall in leaning mode
- LEANSAFE™ ladder top is designed to secure tools and increase productivity
- Front and rear rail are different color for added visual safety
- Rail latch locks legs together when in leaning mode
- Curved foot pads to maximize surface area when in stepladder and leaning mode

### SPECIFICATIONS



Model No.	Size	Stepladder Mode		Leaning Mode	
		Max. Standing Height	Max. Reach Height	Max. Standing Height	Max. Reach Height
L6204	4'	1'-8"	8'-4"	10'	7'-3"
L6206	6'	3'-10"	10'	2'-10"	9'
L6208	8'	5'-9"	12'	4'-9"	11'
L6210	10'	7'-8"	14'	6'-8"	13'
L6212	12'	9'-7"	16'	8'-7"	15'

\*assumes a 5'-6" person with a vertical 12" reach

## L7300SERIES LeansafeX3 Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



### PROFESSIONAL 3 IN 1 MULTIPURPOSE LADDER

- Seamlessly go from step to straight ladder in one adjustment
- One handed lock adjustment
- All in one top, no adjustment needed
- Non-marring rubber top protects work surfaces
- Compact rear rails fit between framing studs

### SPECIFICATIONS

Model No.	Size	Stepladder Mode		Leaning Mode	
		Max. Standing Height	Max. Reach Height	Max. Standing Height	Max. Reach Height
LDP7306	6'	9'	10'	9'	13'

### DIMENSIONS

Top:	16" x 19-1/2"	Steps:	3" trapezoidal
Front Rails:	3-1/8" wide	Rear Rails:	2-1/2" wide
Front Flange:	1-1/4" wide	Rear Flange:	1" wide

# THE BEST TOPS IN THE INDUSTRY



**LOCKTOP™**

Next generation ladder top holds an arsenal of tools



Customize your ladder top with the Lock-In Accessory System



Sturdy paint can hanger decreases chances of spilling



Keeps tools within easy reach with the HolsterTop®



Convenient pail shelf provides additional work surface




## 6200SERIES Stepladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



**COMPATIBLE**  
SEE PAGE 60

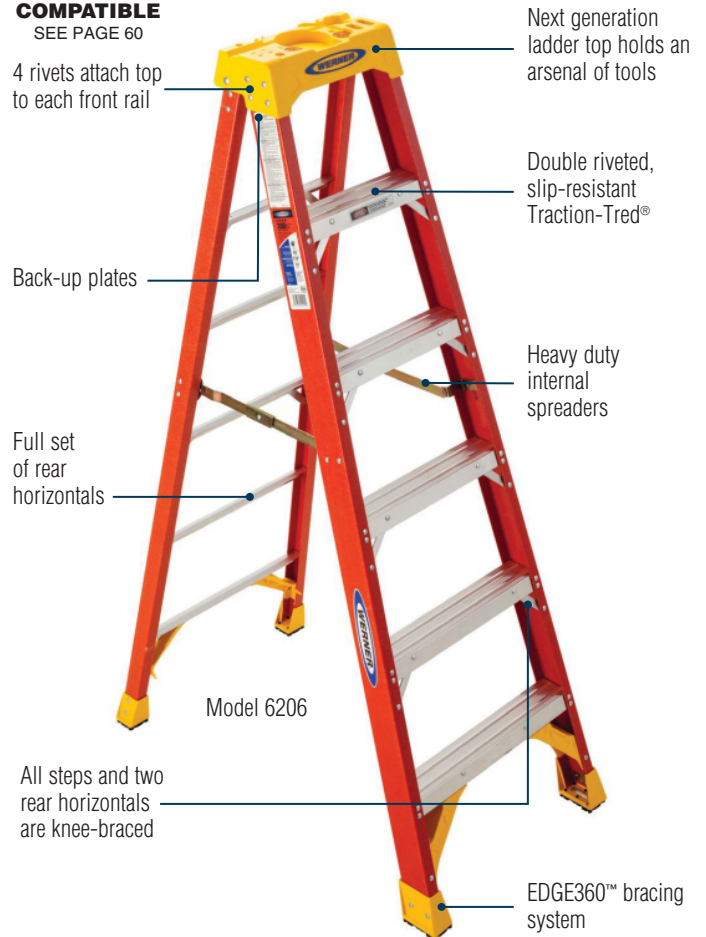

- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Optional yellow molded pail shelf kit, model no. 76-2

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6203	3'	18-1/8"	23-1/8"	2.0	13.0
6204	4'	19-7/8"	29"	3.0	16.0
6205	5'	21-5/8"	35-1/8"	4.1	19.0
6206	6'	23-3/8"	41-1/4"	5.3	22.0
6207	7'	25-1/8"	47-1/2"	6.6	26.0
6208	8'	26-7/8"	53-5/8"	8.1	30.0
6210	10'	30-3/8"	65-7/8"	12.5	39.0
6212	12'	33-7/8"	78-1/4"	15.0	48.0

### DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide



# T6200SERIES Twin Stepladder††


**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING

# C6200SERIES Compact Stepladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

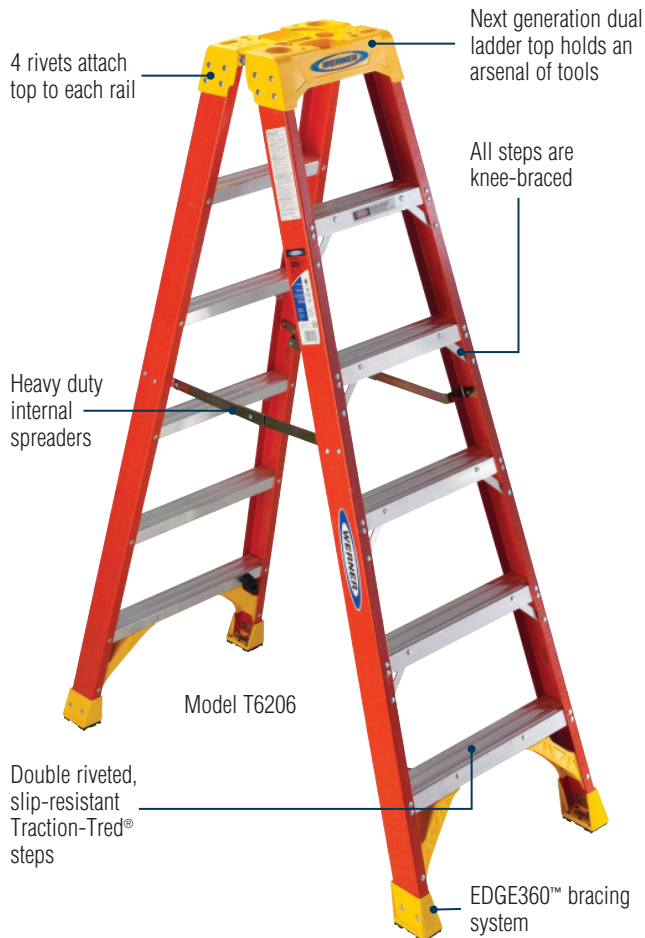

Model T6206



Model C6204

- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails

- Lightweight and compact slim design makes it easy to maneuver around corners and tight spaces
- The lightweight fiberglass construction makes it easy to carry and store

\* On 5ft and above models

## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T6203	3'	18-1/8"	29"	3.1	16.0
T6204	4'	19-7/8"	36-1/8"	4.6	19.0
T6205	5'	21-5/8"	43-1/8"	6.2	23.0
T6206	6'	23-3/8"	50-1/8"	8.0	27.0
T6208	8'	26-7/8"	64-1/8"	12.3	37.0
T6210	10'	30-3/8"	78-1/8"	17.3	54.5
T6212	12'	33-7/8"	92-1/8"	23.2	68.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

## DIMENSIONS

Top:	8-1/2" x 13"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-3/16" wide

## SPECIFICATIONS

Model No.	Top Platform Height	Max. Reach	Compact Ladder Height	Comparable Stepladder Height	Approx. Shipping Wt. Lbs.
C6204	1' 11"	8'	3.5'	4'	11
C6205	2' 10"	9'	4.5'	5'	15
C6206	3' 9"	10'	5.5'	6'	18
C6207	4' 8"	11'	6.5'	7'	20
C6208	5' 8"	12'	7.5'	8'	22

## DIMENSIONS

Platform:	10.5" x 13"	Steps:	3" wide
Front Rails:	17" wide	Rear Rails:	1-1/4" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide



## P6200SERIES Platform Ladder

**300lbs.** LOAD CAPACITY


**TYPE IA**  
DUTY RATING



## FTP6200SERIES Tripod Stepladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

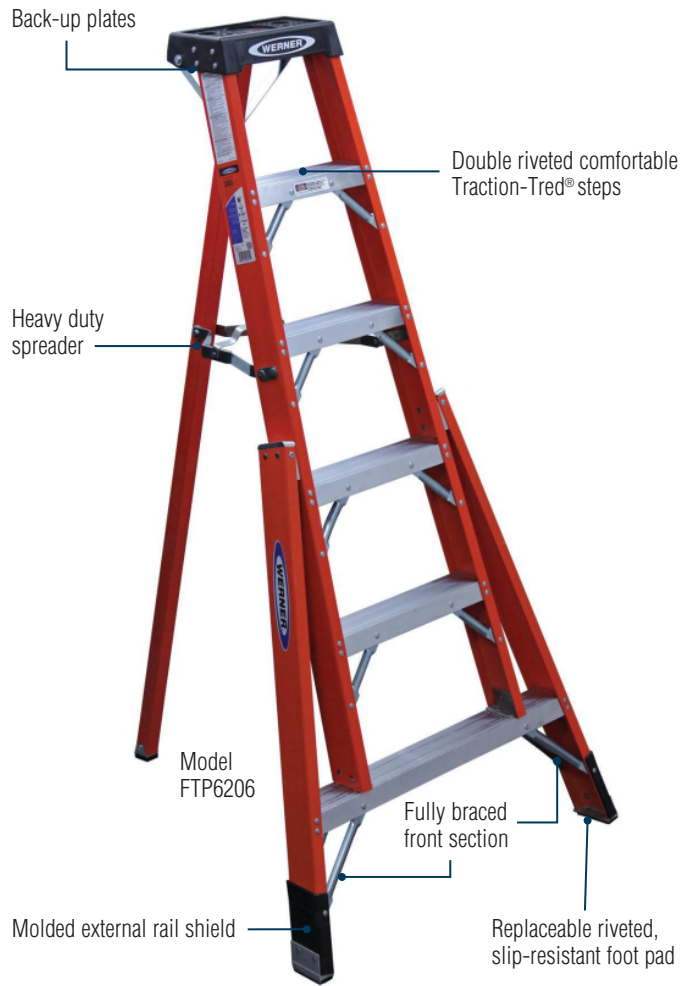


- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

### SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P6202	2'	4'	23-3/8"	29-3/4"	4.2	17.0
P6204	4'	6'	26-7/8"	42"	7.2	24.0
P6206	6'	8'	30-3/8"	54-3/4"	10.9	32.0
P6208	8'	10'	33-7/8"	66-5/8"	15.2	44.5
P6210	10'	12'	37-3/8"	79"	20.1	55.0

### DIMENSIONS

Platform:	14-5/8" x 15"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

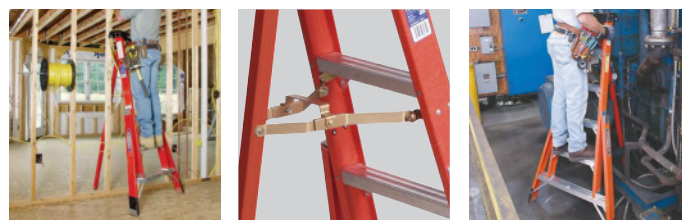

Single rear rail allows FTP Series to rest where other ladders can't

Convenient spreader handle design improves setup and transportability

Makes working in tight spaces easy

- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
FTP6204	4'	31"	30-1/2"	3.7	17.0
FTP6206	6'	36"	43-3/4"	6.8	23.0
FTP6208	8'	40"	57"	10.1	31.0
FTP6210	10'	51"	71"	17.6	42.0
FTP6212	12'	54"	77-3/4"	22.6	51.0

### DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rail:	1-1/2" square (4' to 8'), 2" square (10' and 12')
Flange:	1-3/16" wide		



## 6202MODEL Step Stool

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6202	2'	17-1/4"	19-1/2"	1.4	9.0


### DIMENSIONS

Top:	7" x 12-3/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide, 5/8" wide front

## TW6200SERIES ††

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

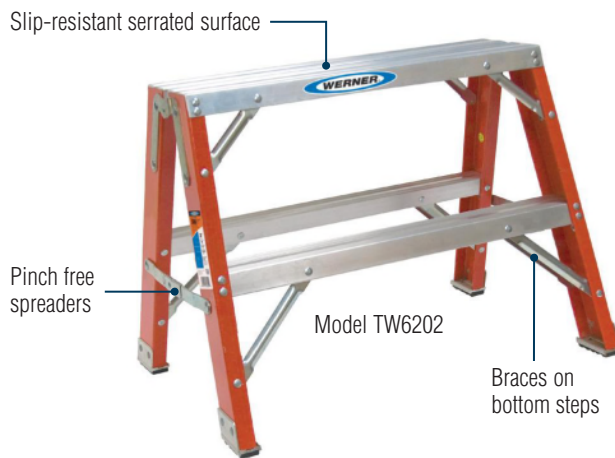

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
TW6202	2'	31-1/4"	22-1/4"	3.0	17.0
TW6203	3'	32-3/4"	29-3/4"	4.7	24.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


### DIMENSIONS

Top:	8" x 28"	Steps:	3" wide
Rails:	3-1/4" wide	Flange:	1-3/16" wide

## T6202MODEL Twin Step Stool††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING

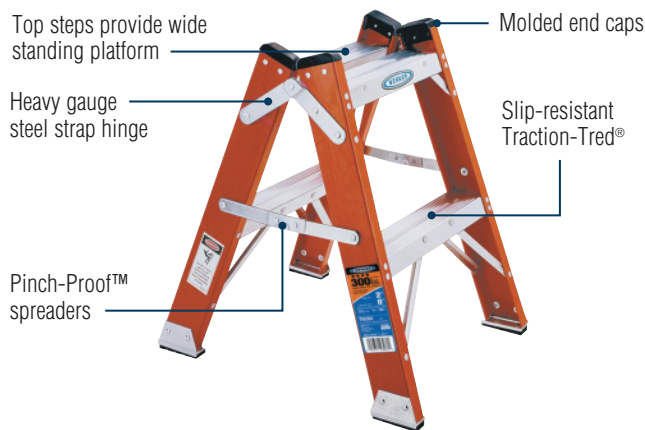

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T6202	2'	21-1/8"	23"	2.1	11.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

### DIMENSIONS


Steps:	3" wide
Rails:	3-1/8" wide
Flange:	1-3/16" wide

Note: Planks or platforms shall be secured to the step stools. The ends of each plank or platform shall extend beyond the outside edge of each step stool by a minimum of 4 inches and a maximum of 10 inches.

## SSFOOSERIES Step Stand

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

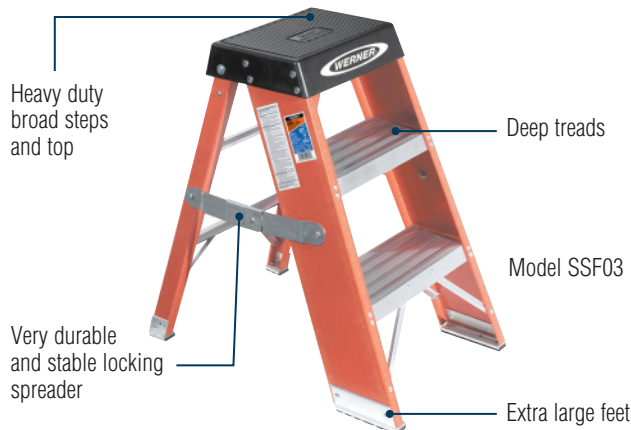

### SPECIFICATIONS

Model No.	Size	Maximum Standing Height	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
SSF02	2'	20"	17"	21"	2.6	15.0
SSF03	3'	30"	18-3/4"	27-1/2"	4.0	19.5

### DIMENSIONS

Top:	9" x 14"	Steps:	6" wide
Front Rails:	6" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide

## 6002 MODEL Step Stool

**250lbs.** LOAD CAPACITY

**TYPE I**  
DUTY RATING



©The blue and yellow ladder is an exclusive registered trademark of Werner Co.



### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6002	2'	17-1/4"	19-1/2"	1.4	8.5


### DIMENSIONS

Top:	7" x 12-3/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide back 5/8" wide front

## 6000 & 6000S SERIES Stepladder

**250lbs.** LOAD CAPACITY

**TYPE I**  
DUTY RATING

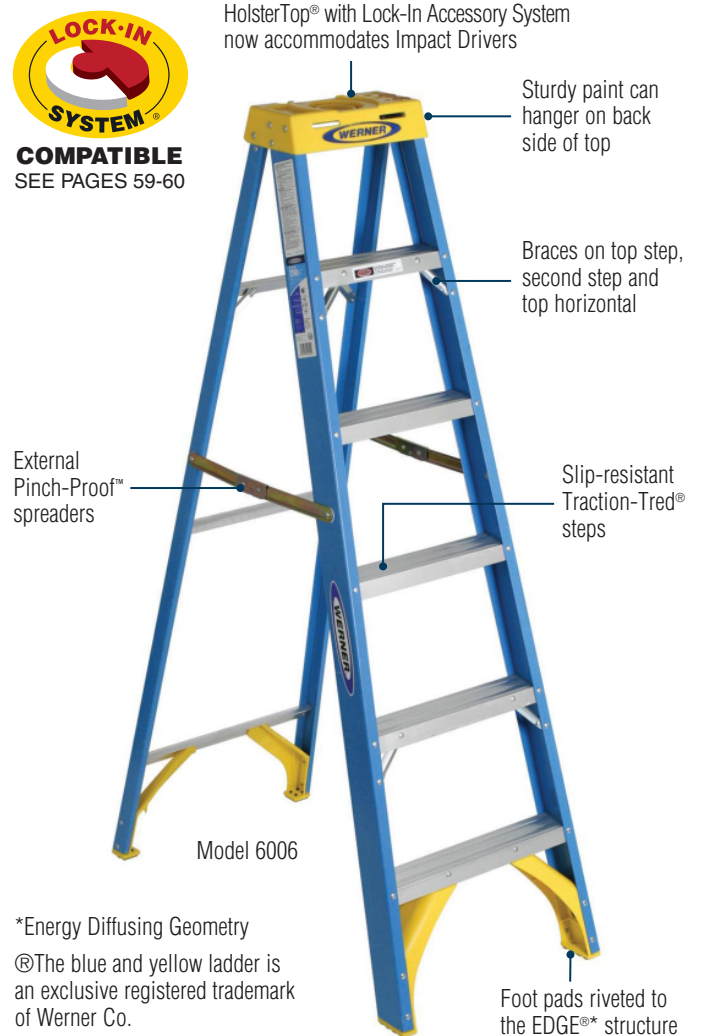

\*Energy Diffusing Geometry

©The blue and yellow ladder is an exclusive registered trademark of Werner Co.



The Lock-In Accessory System lets you customize your ladder top and safely secure your tools.

EDGE® bracing provides enhanced strength and increased protection against damage

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Pail Shelf	Approx. Shipping Wt. Lbs.
6004	4'	19"	28-7/8"	2.6	13.0	6004S	15.0
6005	5'	20-1/2"	35"	3.5	16.0		
6006	6'	22"	41-1/8"	4.5	18.0	6006S	20.0
6008	8'	25"	53-1/2"	6.8	25.5		


### DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide back 5/8" wide front

# T6000SERIES Multi-Use Twin Stepladder††

**250lbs.** LOAD CAPACITY

**TYPE I**  
DUTY RATING

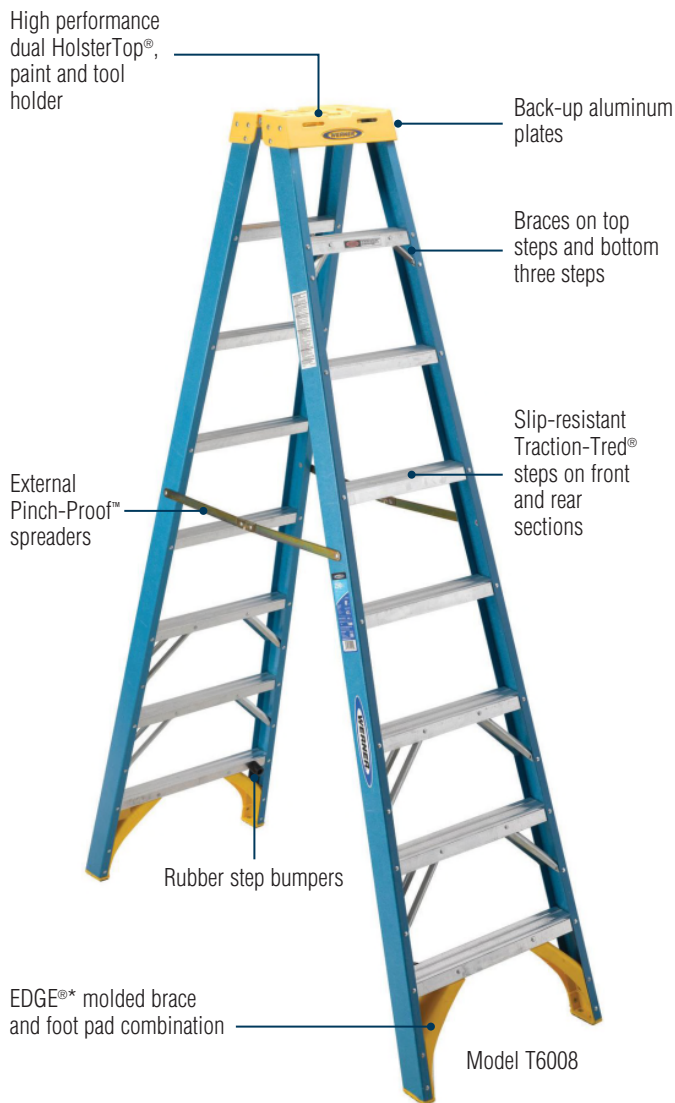

# 5900 & 5900SERIES Stepladder

**225lbs** LOAD CAPACITY PER SIDE

**TYPE II**  
DUTY RATING



\* Energy Diffusing Geometry

- Every rivet backed up by metal plate or washer to protect rails

® The blue and yellow ladder is an exclusive registered trademark of Werner Co.

## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T6004	4'	19"	36-1/8"	4.5	17.5
T6006	6'	22"	50-1/8"	7.9	24.5
T6008	8'	25"	64-1/8"	11.9	35.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

## DIMENSIONS

Top:	8-1/2" x 13"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-1/8" wide


## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Pail Shelf	Approx. Shipping Wt. Lbs.
5904	4'	19"	28-7/8"	2.6	11.5	N/A	N/A
5906	6'	22"	41-1/8"	4.5	16.0	5906S	16.5
5908	8'	25"	53-1/2"	6.8	22.5	5908S	23.0


## DIMENSIONS

Top:	5-3/8" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide



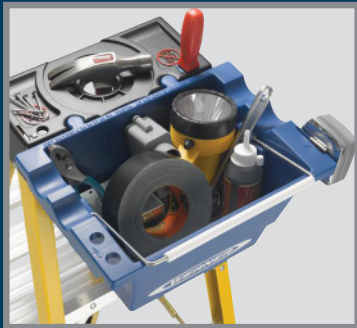

HolsterTop® with the new Lock-in Accessory System

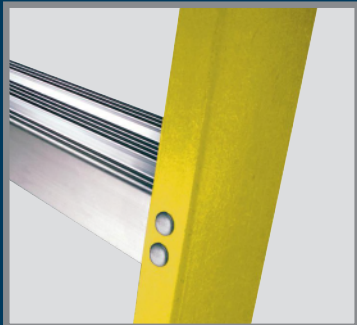

Slip-resistant Traction-Tred® steps



New oversized, molded PROGUARDBOOTS™

## Features

- HolsterTop® with Lock-In System secures tools to increase productivity.
- Back-up plates reinforce all top connectors.
- Braces on top and bottom step.
- Double riveted slip-resistant Traction-Tred® steps
- Full set of rear horizontals spaced one per foot
- Heavy duty internal spreaders
- Oversized, molded Proguard Boot™ provides firm slip-resistant footing and protect fiberglass rail
- Optional manual pail shelf kit, model no. PK76-9 or automatic closing pail shelf kit model no. PK76-3


## 6100SERIES Stepladder

300lbs. LOAD CAPACITY

TYPE I DUTY RATING



COMPATIBLE SEE PAGES 59-60

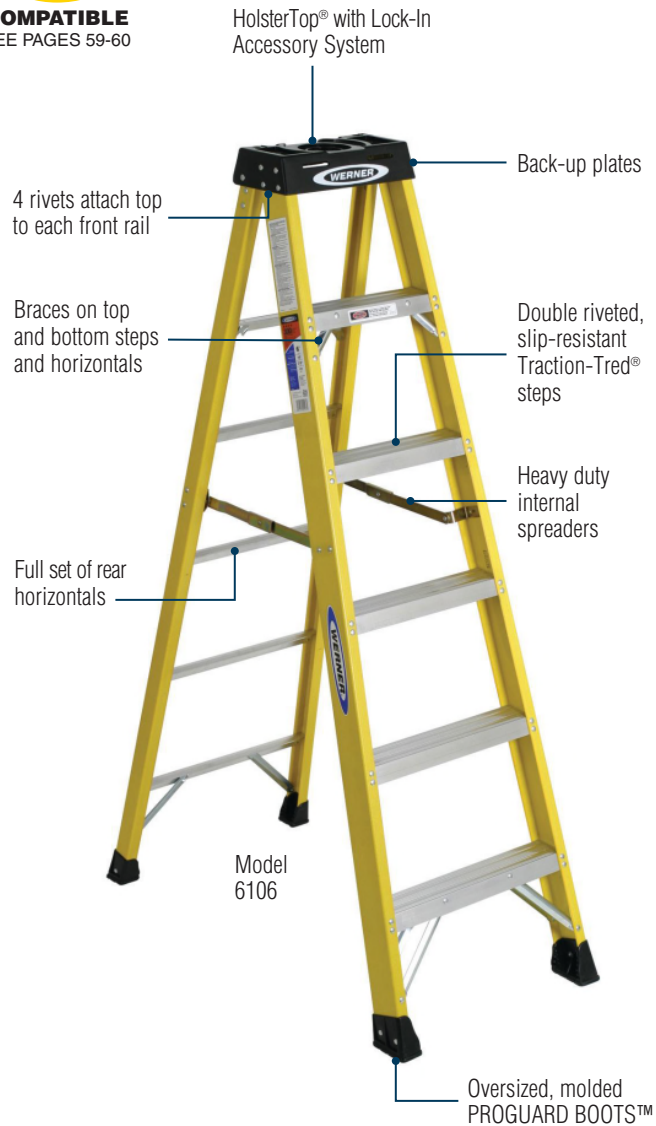

## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
6104	4'	19"	28-7/8"	2.6	15.0
6106	6'	22"	41-1/8"	4.5	21.0
6108	8'	25"	53-1/2"	6.8	30.0
6110	10'	28"	65-3/4"	13.0	35.5
6112	12'	31"	78-1/8"	17.3	44.0

## DIMENSIONS

Top:	5-3/4" x 13"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Flange:	1-3/16" wide		



# FIBERGLASS STEPLADDER COMPARISON CHART



Features and Benefits	7400 SERIES	T7400 SERIES	P7400 SERIES	7300 SERIES	6200 SERIES	T6200 SERIES	P6200 SERIES	6100 SERIES	6000 SERIES	T6000 SERIES	5900 SERIES
	TYPE IAA	TYPE IAA/IA	TYPE IAA/IA	TYPE IAA	TYPE IA	TYPE IA	TYPE IA	TYPE IA	TYPE I	TYPE I	TYPE II
Slip-resistant Traction-Tred® steps	●	●	●	●	●	●	●	●	●	●	●
Slip-resistant foot pad	●	●	●	●	●	●	●	●	●	●	●
LOCKTOP™					●	●					
Aluminum drill HolsterTop®	●			●							
HolsterTop®								●	●	●	●
Aluminum top		●									
Lock-In Accessory System					●			●	●		●
Designed for one or two person jobs		●								●	
Slip-resistant Traction-Tred® steps all knee braced	●	●	●	●	●	●	●				
Molded braces	●	●	●	●	●	●	●		●	●	●
Rail shields	●	●	●	●	●	●	●				
Oversized Foot Pads				●	●	●	●				
Internal spreaders	●	●		●	●	●		●			
External spreaders									●	●	●
Full set of rear horizontals	●		●	●	●		●	●			
Platform for comfortable work area			●				●				
Shoulder bolt and nut on top hinge	●	●	●	●		●	●			●	
Back-up plates to reinforce top connectors	●	●	●	●	●	●	●	●	●	●	●
Every rivet backed up by metal plate or washer to protect fiberglass	●	●	●	●	●	●	●	●	●	●	●
4 rivets attach top to each front rail	●	●	●	●	●	●	●	●			




# PODIUM & PODIUM GATE




Extended guard rail securely wraps around work zone and holds an arsenal of tools



Extra-large standing platform for long standing comfort



Folds up for storage



Fully surrounds the user



Latch keeps the user inside the ladder footprint

## Work facing any direction

- **4X WORK ZONE**

Allows you to work facing any direction so you can accomplish more without having to reposition your ladder.

- Ideal for working at fixed heights and easier to maneuver than scaffolds or lifts.

- Feel like you're standing on the ground with the extra-large platform, 36" high extended guard rail and LOCKTOP™ wrap around ladder top.

- Podium platform with toe guard




- Available in Type IAA (375lb capacity) and Type IA (300lb capacity) Duty Ratings

- Available with factory-installed casters for improved mobility

- For working around electricity. Non-conductive side rails.

## Attaches to any Werner Podium

- Easily retrofitted; convenient and affordable
- Fully surrounds the user
- Helps keep the ladder user inside the ladder footprint
- Work facing any direction
- Neatly collapses for easy access and storage



### SPECIFICATIONS

Model No.	Fits On	Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs
-----------	---------	-----------------------------	--------------------------


AC63	All Podium Ladders	4.8" x 28" x 4.2"	6
------	--------------------	-------------------	---

\* Ladder sold separately

## PD7300/PD7300-4CSERIES Podium Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

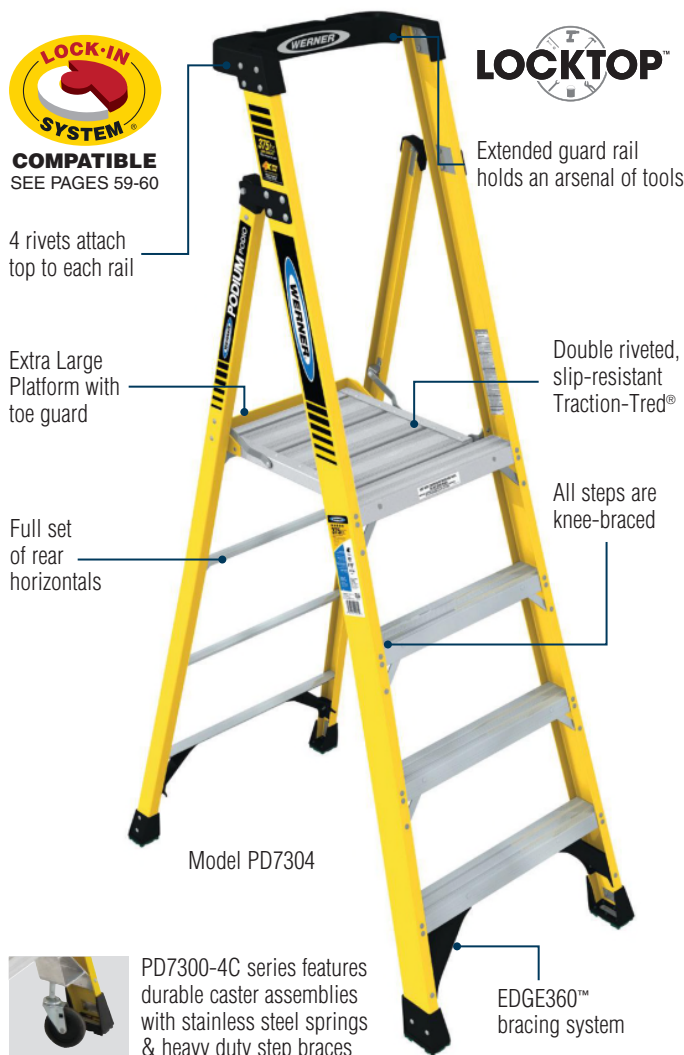

- Ideal for working at fixed heights, easier to maneuver than scaffolds or lifts
- Customize your ladder top with the Lock-In Accessory System
- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 6' and 8' models

### SPECIFICATIONS

Model No.	Height (Size) to Platform	Max. Reach	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Casters	Approx. Shipping Wt. Lbs.
PD7302	2'	8'	24"	31"	7.0	20.0	PD7302-4C	28.0
PD7303	3'	9'	26"	37"	9.2	21.0	PD7303-4C	28.3
PD7304	4'	10'	27-1/2"	43"	11.3	26.5	PD7304-4C	33.8
PD7305	5'	11'	29-1/4"	50"	13.8	32.5	PD7305-4C	41.0
PD7306	6'	12'	31"	56"	16.4	38.5	PD7306-4C	45.8
PD7307	7'	13'	33"	62"	19.4	38.0	PD7307-4C	47.0
PD7308	8'	14'	34-1/2"	68"	22.3	45.5	PD7308-4C	52.8
PD7310	10'	16'	38-1/2"	81"	29.1	60.0	PD7310-4C	68.0
PD7312	12'	18'	41-1/2"	93"	36.8	66.5	PD7312-4C	74.5


### DIMENSIONS

Platform:	16" x 19.5"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

## PD6200/PD6200-4CSERIES Podium Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

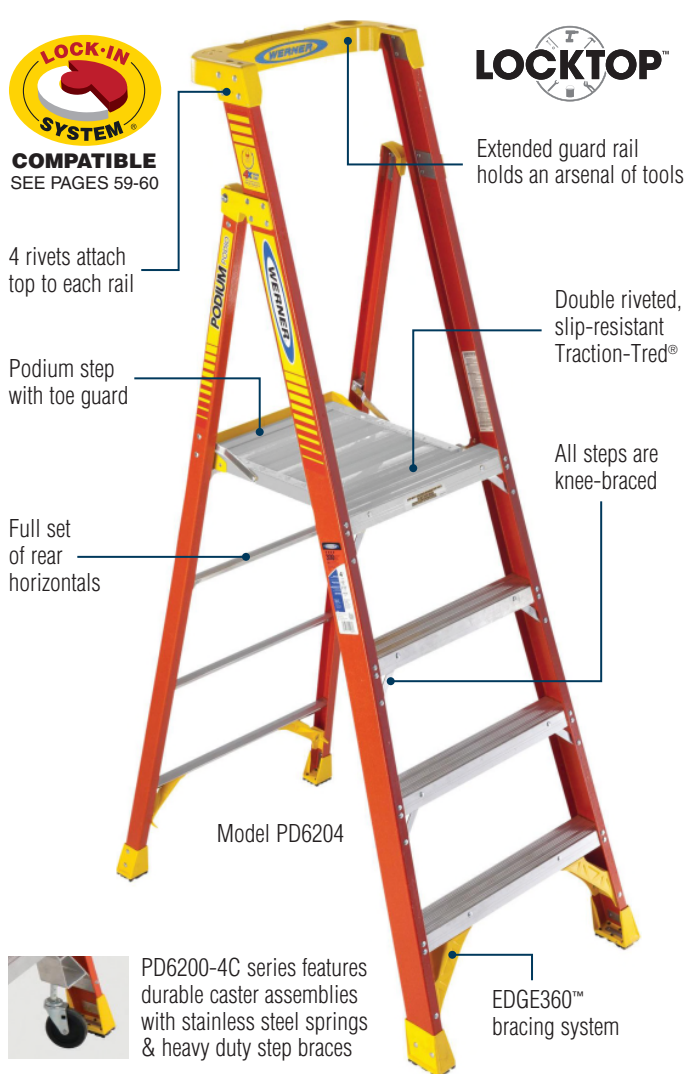

- Ideal for working at fixed heights, easier to maneuver than scaffolds or lifts
- Customize your ladder top with the Lock-In Accessory System
- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Internal aluminum spreaders on 8' and 10' models

### SPECIFICATIONS

Model No.	Height (Size) to Platform	Max. Reach	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Casters	Approx. Shipping Wt. Lbs.
PD6202	2'	8'	24"	31"	7.0	20.0	PD6202-4C	28.0
PD6203	3'	9'	26"	37"	9.2	21.0	PD6203-4C	28.3
PD6204	4'	10'	27-1/2"	43"	11.3	26.5	PD6204-4C	33.8
PD6205	5'	11'	29-1/4"	50"	13.8	32.5	PD6205-4C	41.0
PD6206	6'	12'	31"	56"	16.4	34.5	PD6206-4C	42.5
PD6207	7'	13'	33"	62"	19.4	38.0	PD6207-4C	47.0
PD6208	8'	14'	34-1/2"	68"	22.3	44.5	PD6208-4C	51.8
PD6210	10'	16'	38"	80"	29.1	55.5	PD6210-4C	62.8
PD6212	12'	18'	41-1/2"	93"	36.8	66.5	PD6212-4C	74.5

### DIMENSIONS

Platform:	16" x 19.5"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide




## Features

- Non-conductive fiberglass rails
- Five positions: 1. Twin Step Ladder 2. Stairway Step Ladder 3. Extension ladder 4. 2-Scaffold bases 5. Wall Ladder
- Compact storage position is great for easily taking the ladder up stairs or on lifts
- Wide rungs for standing comfort
- Slip-resistant feet
- Adjustable telescoping design for maximum versatility
- Designed for both 1-person and 2-person jobs
- Size refers to the ANSI definition of length. ANSI code: A14.2-2017 6.2.4
- Impact resistant hand grips
- Shatter-Proof J-Locks
- Base Width 28.07 inches, Base Spread 36.75 inches

## FMTSERIES Multi-Position Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

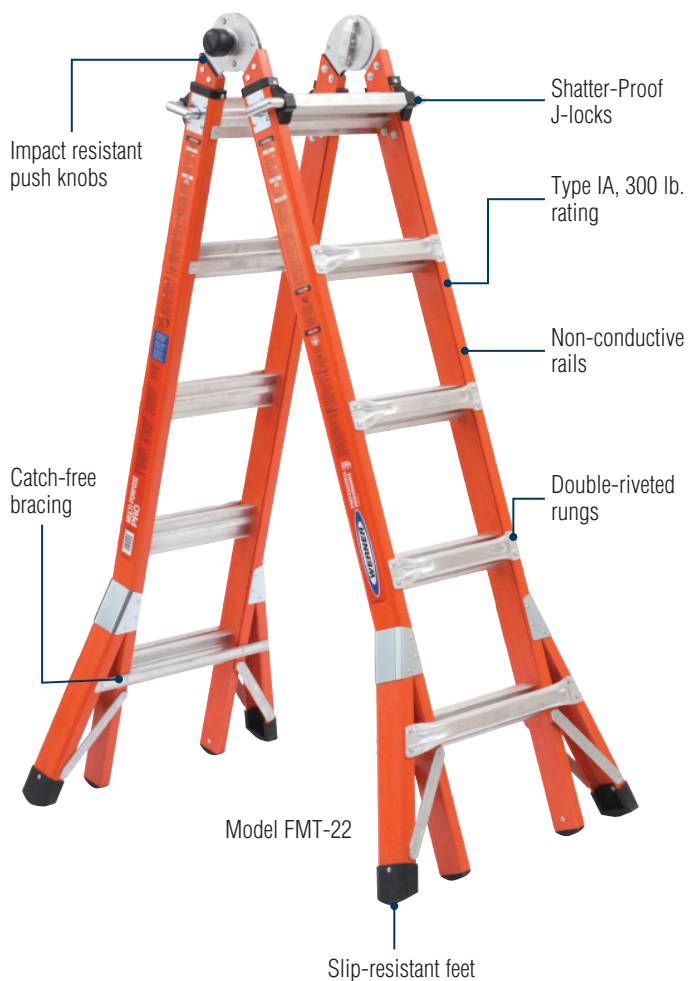

### SPECIFICATIONS

Model No.	Stepladder Height (ft)	Stairway Height (ft)	Wall Height (ft)	Extension Height (ft)	Scaffold Height (ft)	Weight (lbs)
FMT-13	3 to 5	3 to 5	4 to 5	7 to 11	1.1 to 2	33.2
FMT-17	4 to 7	4 to 7	5 to 7	9 to 15	1.1 to 3	39.9
FMT-22	5 to 9	5 to 9	6 to 9	11 to 19	1.1 to 3	49.9

### DIMENSIONS

Rails:	2-5/8"	Rung:	1-1/8"
Flange:	1"	Steps/Rung:	1"

# GLIDESAFE™

EASY OPERATING EXTENSION LADDER

## T6200-2GSSERIES Extension Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



Lift & lowering assist technology

Exclusive Alflo® rung joint means Twist-Proof® performance

Auto Lock

Transportation latch

Heavy duty locks

Two color rails

Dual-action feet

- Lift-assist technology makes it easier to extend with up to 50% less force†, eliminating back and arm strain
- Built in lowering assist technology guarantees a smooth closing, preventing slamming and rope burns
- The dual-locking system ensures the ladder won't extend while on the go, providing peace of mind

### SPECIFICATIONS

Model No.	Ladder Size	Ladder Length	Reach Height †	Ladder Weight	Rung Type	Shipping Length	Shipping Width	Shipping Height
T6220-2GS	20'	17'	19'	44.5 lbs	Tri-Rung	120"	19"	6.9"
T6224-2GS	24'	21'	23'	52.0 lbs	Tri-Rung	144"	19"	6.9"
T6228-2GS	28'	25'	27'	59.5 lbs	Tri-Rung	168"	19"	6.9"
T6232-2GS	32'	29'	31'	71.5 lbs	Tri-Rung	192"	19"	6.9"
T6236-2GS	36'	32'	34'	84.5 lbs	Tri-Rung	216"	19"	6.9"
T6240-2GS	40'	35'	37'	92.5 lbs	Tri-Rung	240"	19"	6.9"

† Percentage of assist can vary by ladder size, friction between siderails and variation on lift assist technology, compared to Werner D6200 300lbs fiberglass extension ladders


‡ Assumes a 5ft 7in person with a vertical 12in reach



## D7100-2LV SERIES D-Rung Extension Ladder w/Integrated Leveling

**375lbs.** LOAD CAPACITY


**TYPE IAA**  
DUTY RATING

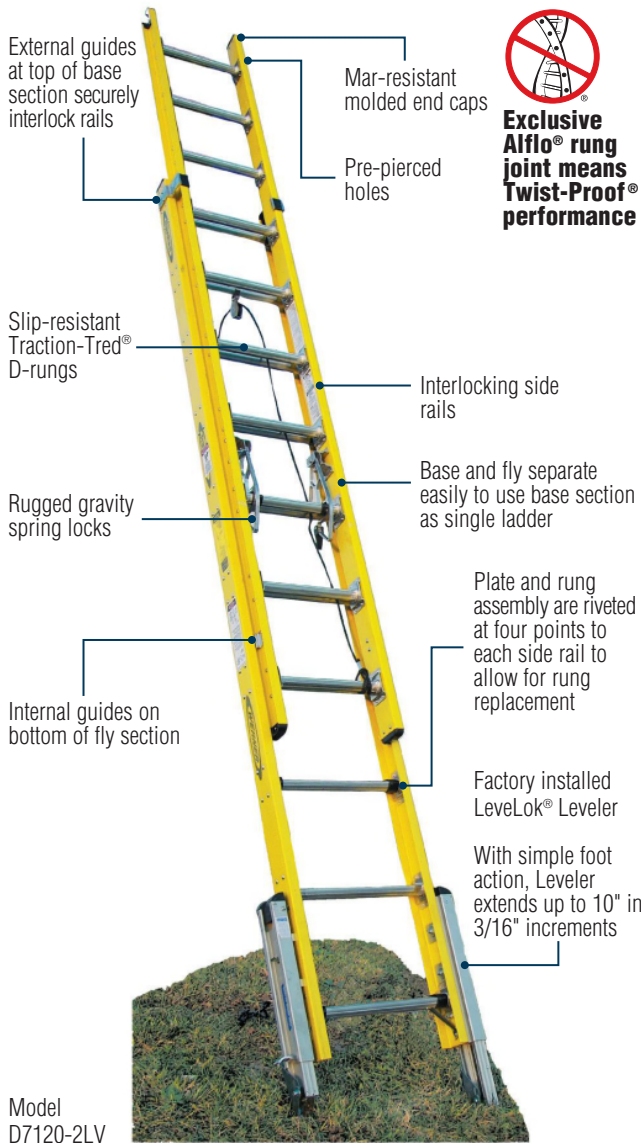

## D7100-2 SERIES D-Rung Extension Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

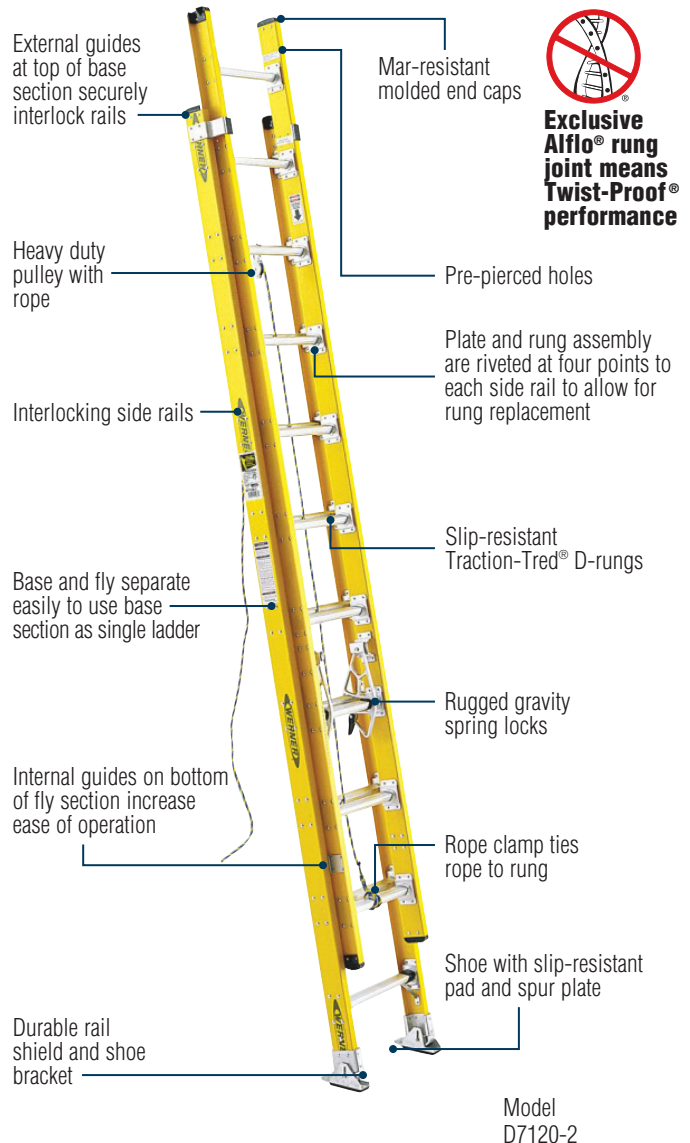

**SPECIFICATIONS** NOTE: Type IAA duty rating is for extension ladders up to 32 feet

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D7120-2LV	20'	17'	8.6	58.0
D7124-2LV	24'	21'	10.3	66.5

**DIMENSIONS**

Rails:	Flange:	Rungs:	Fly Width:	Base Width:
20' to 32'	3-5/16"	1-3/16"	1-5/8"	16-1/8" outside rails, 19" outside rails, 22-3/4" outside shoes

**SPECIFICATIONS** NOTE: Type IAA duty rating is for extension ladders up to 32 feet

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D7116-2†	16'	13'	7.0	41.0
D7120-2	20'	17'	8.7	50.0
D7124-2	24'	21'	10.3	58.5
D7128-2	28'	25'	12.0	67.0
D7132-2	32'	29'	13.7	82.5

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

D7136-2	36'	32'	23.8	113.0
D7140-2	40'	35'	26.7	126.5

† Note: D7116-2 is not equipped with rope and pulley

**DIMENSIONS**

Rails:	Flange:	Rungs:	Fly Width:	Base Width:
16' to 32'	3-5/16"	1-3/16"	1-5/8"	16-1/8" outside rails, 19" outside shoes
36' and 40'	4"	1-3/4"	1-3/4"	16-3/4" outside rails, 22" outside shoes


# 7100-2/7100-1SERIES Round Rung Extension/Straight Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

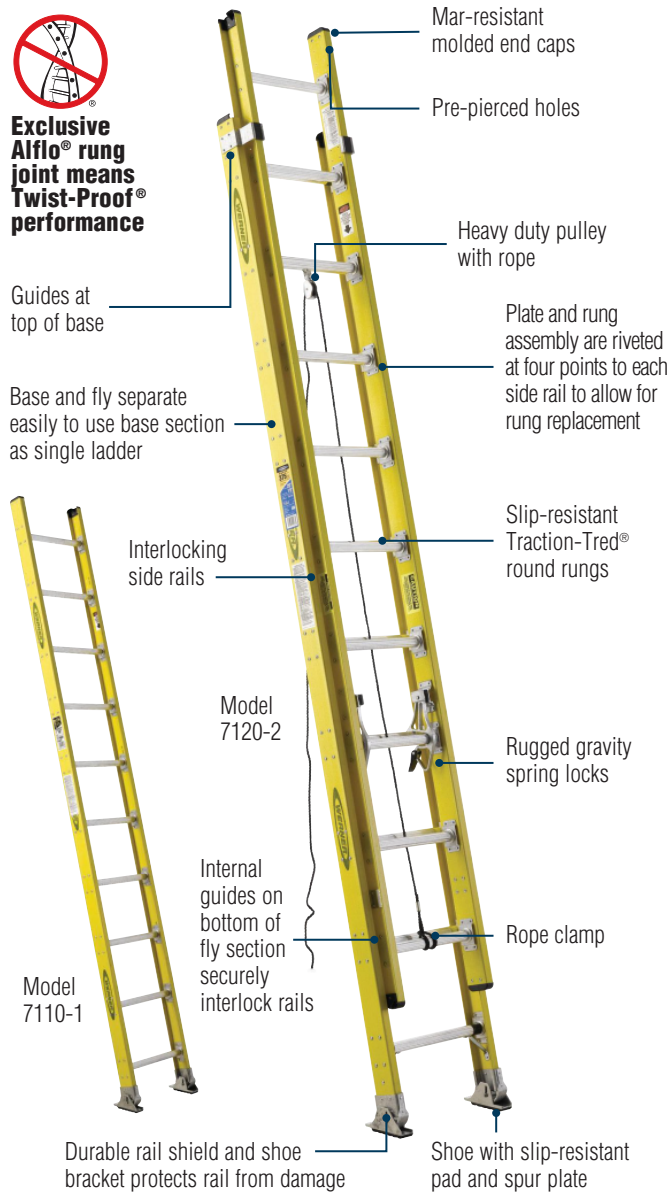

## SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Straight Ladder Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7116-2†	16'	13'	7.0	38.5	7108-1	8'	4.5	20.0
7120-2	20'	17'	8.7	47.0	7110-1	10'	5.5	24.0
7124-2	24'	21'	10.3	55.0	7112-1	12'	6.5	28.0
7128-2	28'	25'	12.0	63.0	7114-1	14'	7.6	32.0
7132-2	32'	29'	13.7	78.0	7116-1	16'	8.6	40.0

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

—	—	—	—	—	7118-1	18'	12.5	52.0
—	—	—	—	—	7120-1	20'	13.9	58.0

† Note: 7116-2 is not equipped with rope and pulley

## DIMENSIONS

	Rails:	Flange:	Rungs:	Width (outside rails):	Width (outside shoes):
7100-2: ALL	3-5/16"	1-3/16"	1-1/4"	17-3/4" outside rails	19" outside shoes
7100-1: 8' to 16'	3-5/16"	1-3/16"	1-1/4"	17-3/4" outside rails	19" outside shoes


# D8200-2EQSERIES Extension Ladder w/Integrated Leveling

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

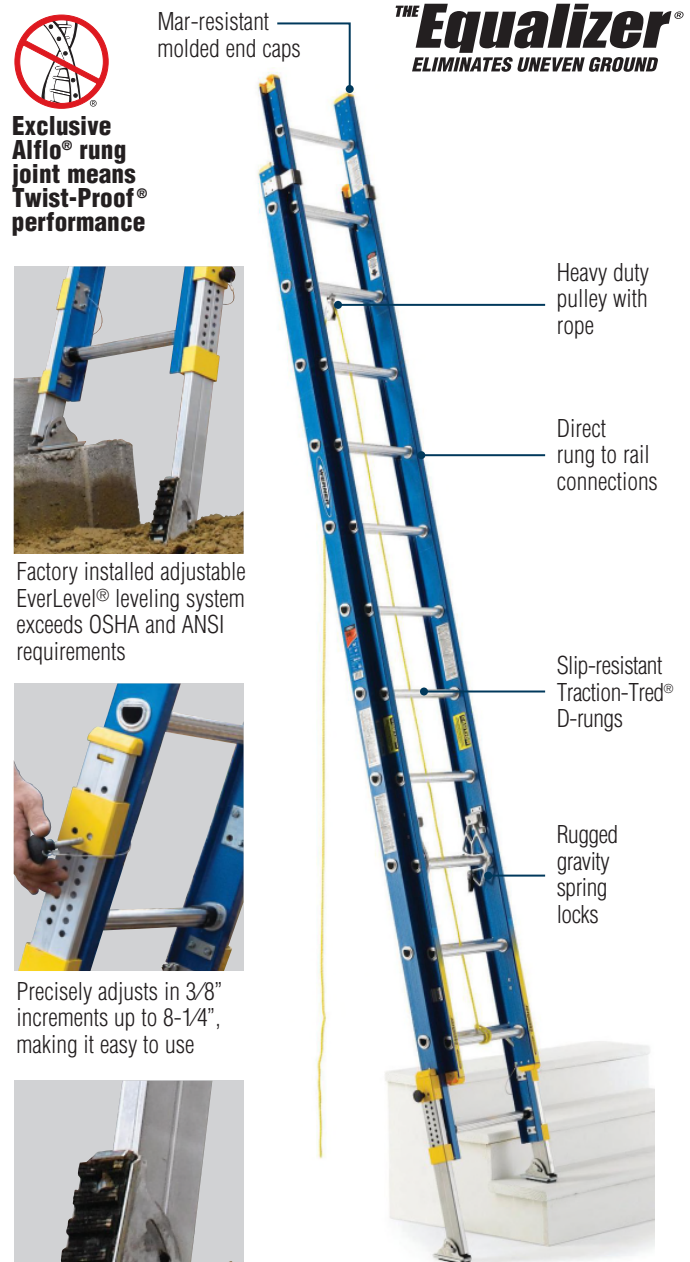

Dual action feet for use on hard or penetrable surfaces

Model D8224-2EQ

®The blue and yellow ladder is an exclusive registered trademark of Werner Co.

## SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D8220-2EQ	20'	17'	10.0	54.0
D8224-2EQ	24'	21'	11.9	62.0
D8228-2EQ	28'	25'	13.8	70.0

## DIMENSIONS


Rails:	3-5/16" wide	Fly Width:	16" outside rails
Flange:	1-3/16" wide	Base Width:	17-3/4" outside rails, 21-7/16" outside of feet
Rungs:	1-5/8"		



## D6200-2/D6200-ISERIES D-Rung Extension/Straight Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

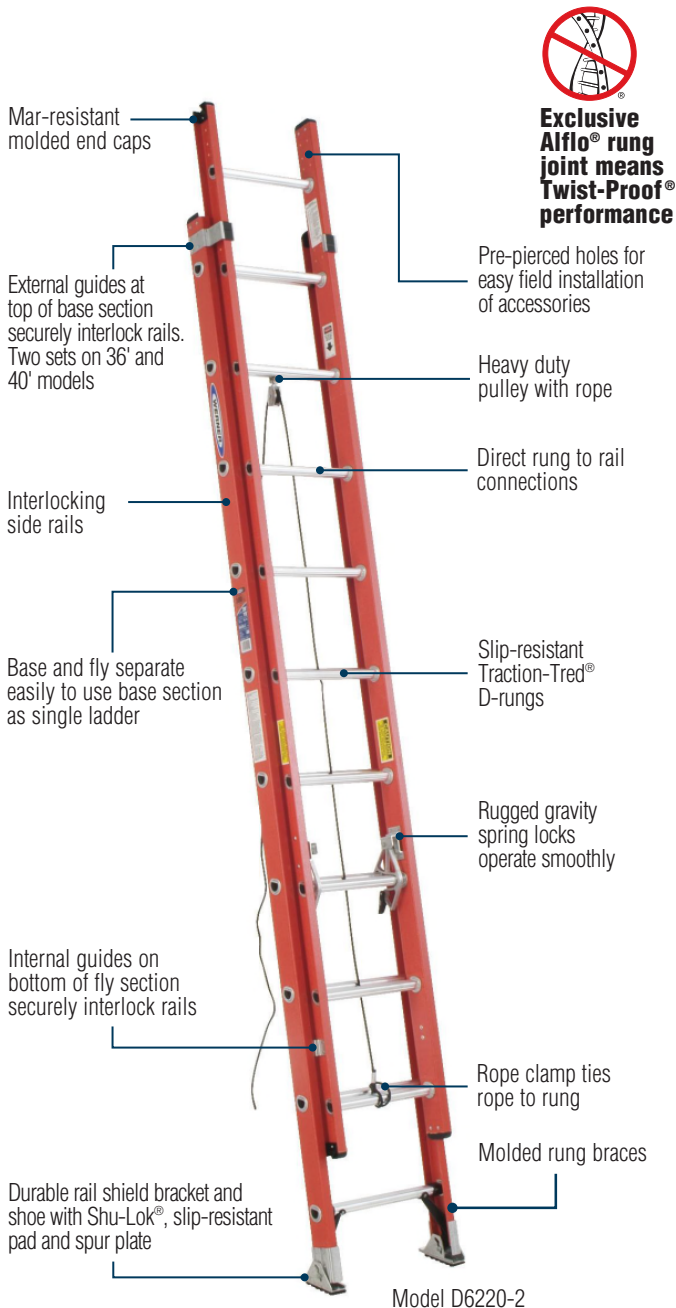

### SPECIFICATIONS

Model No.	Total Length of Sections	Max. Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Single Ladder Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6216-2‡	16'	13'	7.0	36.5	D6208-1	8'	4.7	19.5
D6220-2	20'	17'	8.7	44.5	D6210-1	10'	5.8	23.0
D6224-2	24'	21'	10.3	52.0	D6212-1	12'	6.9	27.0
D6228-2	28'	25'	12.0	59.5	D6214-1	14'	8.0	31.0
D6232-2	32'	29'	13.7	71.5	D6216-1	16'	9.1	37.0
D6236-2	36'	32'	15.3	80.5	--	--	--	--
D6240-2	40'	35'	17.0	88.5	D6220-1	20'	11.5	45.5

‡ Note: D6216-2 is not equipped with rope and pulley


### DIMENSIONS

Rails:	3-5/16" wide	Fly Width:	16" outside rails
Flange:	1-3/16" wide	Base Width:	19" outside shoes
Rungs:	1-5/8"		

## D6200-3SERIES D-Rung Compact Extension Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

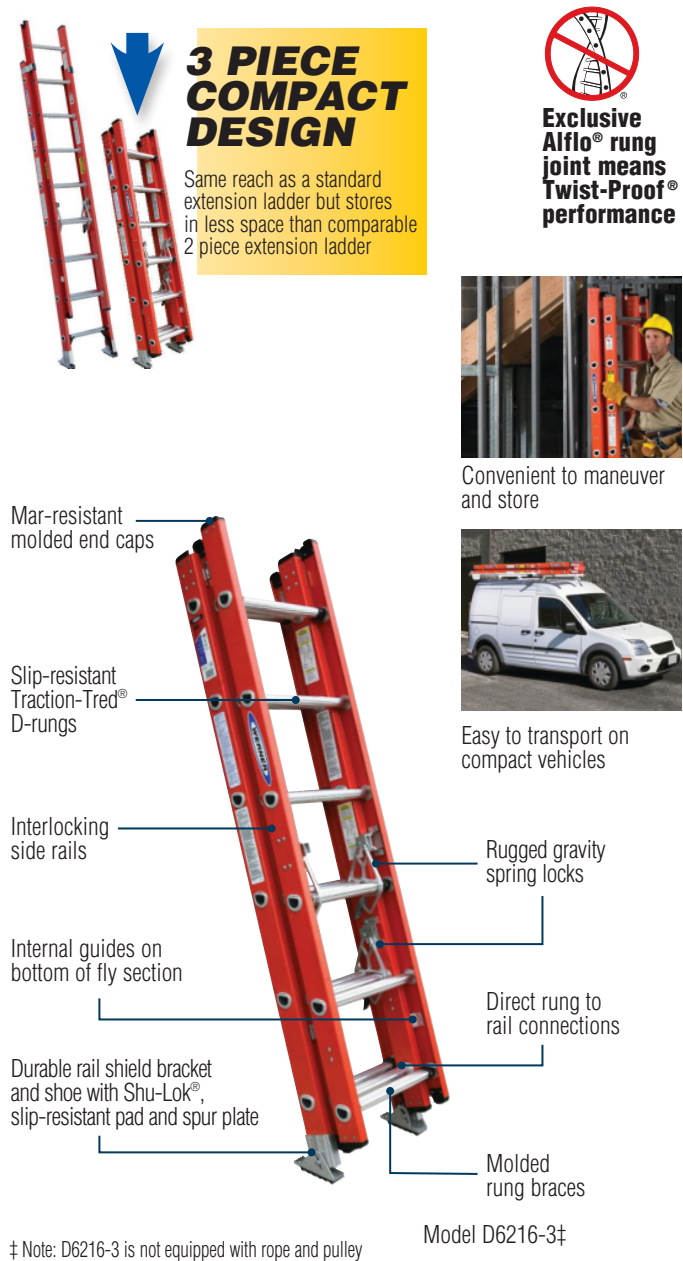

‡ Note: D6216-3 is not equipped with rope and pulley

### SPECIFICATIONS

Model No.	Total Length of Sections	Total Length in Storage Position 2 vs. 3 piece*	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6216-3	18'	8' / 6'	13'	8.5	40.5
D6220-3	23'	10' / 8'	17'	11.1	54.0
D6224-3	27'	12' / 9'	21'	12.4	61.0
D6228-3	31'	14' / 11'	26'	15.0	74.5
D6232-3	35'	16' / 12'	29'	13.7	81.0

\* Total Length of ladder in storage position, comparison of Standard 2 - piece vs. New 3 - piece extension ladder.

### DIMENSIONS

Rails:	3-5/16" wide	Fly Width:	16" outside rails
Flange:	1-3/16" wide	Base Width:	19" outside shoes
Rungs:	1-5/8"		




# D6000-2SERIES D-Rung Extension Ladder

**250lbs.** LOAD CAPACITY

**TYPE I**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

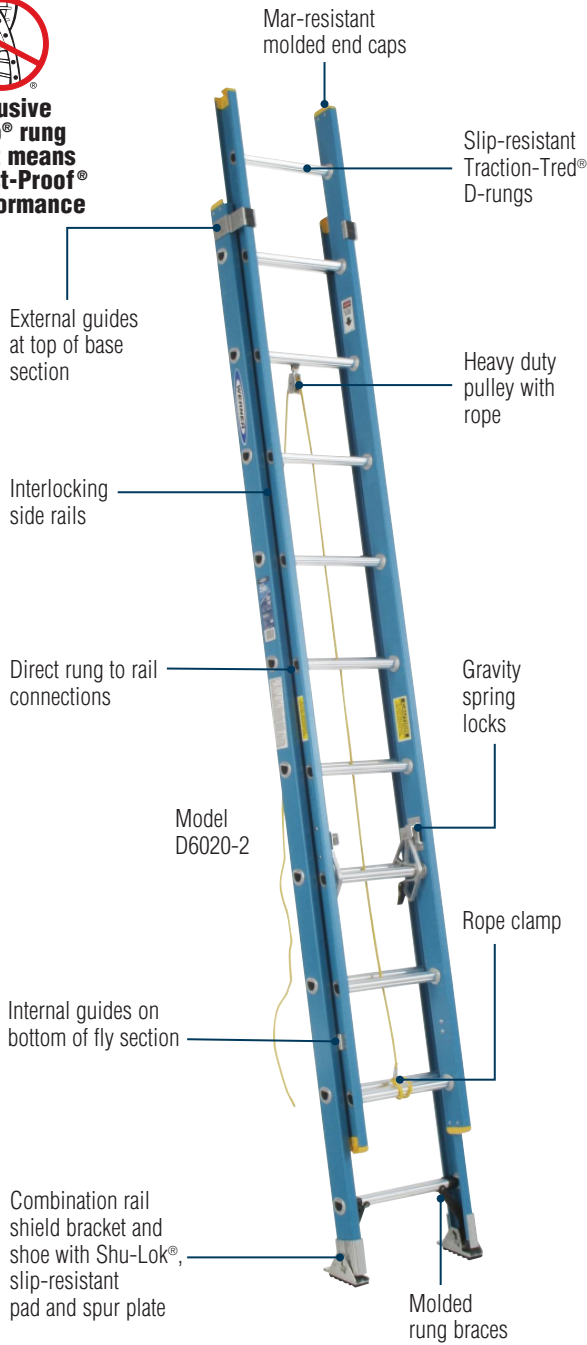


# D5900-2SERIES D-Rung Extension Ladder

**225lbs.** LOAD CAPACITY

**TYPE II**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

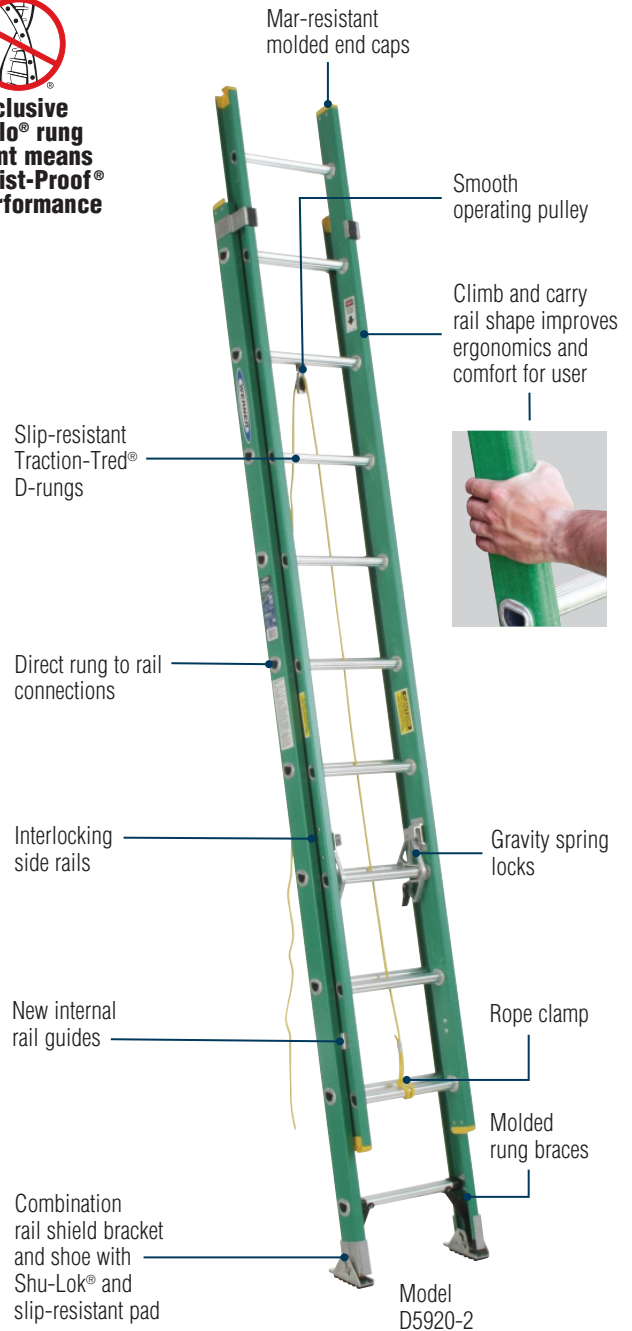

©The blue and yellow ladder is an exclusive registered trademark of Werner Co.

## SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D6016-2‡	16'	13'	7.0	32.5
D6020-2	20'	17'	8.7	39.0
D6024-2	24'	21'	10.3	46.0
D6028-2	28'	25'	12.0	55.5

‡ Note: D6016-2 is not equipped with rope and pulley

## DIMENSIONS

Rails:	3-3/8" wide	Fly Width:	15-3/4" outside rails
Flange:	1-3/16" wide	Base Width:	18-1/8" outside shoes
Rungs:	1-1/2"		

## SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D5916-2‡	16'	13'	5.9	27.0
D5920-2	20'	17'	7.4	33.0
D5924-2	24'	21'	8.9	39.0

‡ Note: D5916-2 is not equipped with rope and pulley


















## DIMENSIONS

Rails:	3-5/16" wide	Fly Width:	15-1/8" outside rails
Flange:	1-3/16" wide	Base Width:	17-3/4" outside shoes
Rungs:	1-1/2"		





# FIBERGLASS EXTENSION LADDER COMPARISON CHART

Features and Benefits	D7200-2 SERIES	D7100-2LV SERIES	D7100-2 SERIES	7100 SERIES	D8200-2EQ SERIES	D6400-2 SERIES	D6200 SERIES	D6000-2 SERIES	D5900-2 SERIES
	TYPE IAA/IA	TYPE IAA/IA	TYPE IAA/IA	TYPE IAA	TYPE IA	TYPE IA	TYPE IA	TYPE I	TYPE II
 Guides at top of base section	●	●	●	●	●	●	●	●	
 Guides on bottom of fly section	●	●	●	●	●	●	●	●	●
 Pulley and rope systems	●	●	●	●	●	●	●	●	●
 Rail shield and shoe bracket protects rail	●	●	●	●	●	●	●	●	
 Shoe with slip-resistant pad and spur plate	●	●	●	●	●	●	●	●	●
 Rugged gravity spring locks	●	●	●	●	●	●	●	●	●
 Rope clamp ties rope to rung	●	●	●	●	●	●	●	●	●
 Alflo® rung joint for Twist-Proof® performance	●	●	●	●	●	●	●	●	●
Electrically non-conductive side rails	●	●	●	●	●	●	●	●	●
 Mar-resistant molded end caps	●	●	●	●	●	●	●	●	●
Base section may be used as a single ladder	●	●	●	●	●	●	●	●	●
 Pre-pierced holes for easy field installation of accessories	●	●	●	●	●	●	●		
 Plate and rung assembly to allow for rung replacement	●	●	●	●					
 Direct rung to rail connections					●	●	●	●	●
 Interlocking side rails	●	●	●	●	●	●	●	●	●
 Slip-resistant D-rungs	●	●	●		●	●	●	●	●
 Slip-resistant round rungs				●					
 Molded rung braces						●	●	●	●
 Integrated leveling		●			●				


# 7800SERIES Combination Step/Extension Ladder††

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

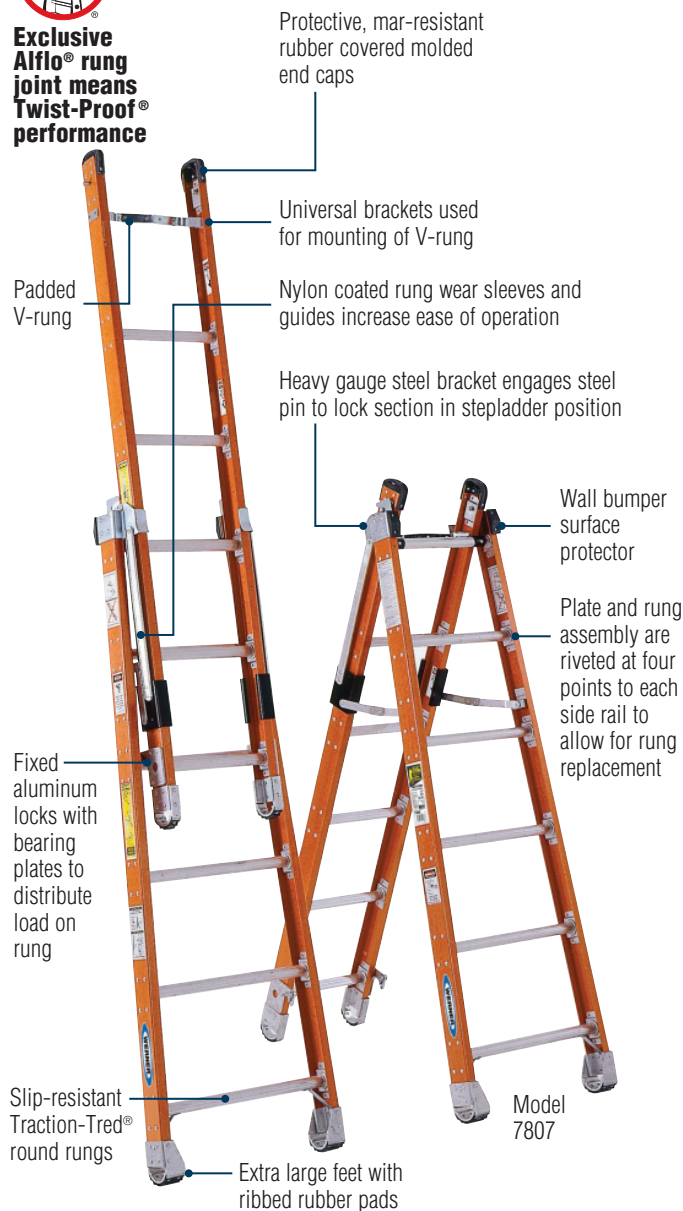

## SPECIFICATIONS

Model No.	Stepladder Size	Width at Flared Base (outside rails)	Stepladder Spread to Outside of Shoes	Length of Ladder in Closed Position	Extended Ladder Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7806	6'	23-1/4"	46-1/2"	72-3/4"	9-1/2'	8.6	33.5
7807	7'	24-1/4"	53-1/2"	84-3/4"	11-1/2'	10.3	37.0
7808	8'	25-1/4"	60-1/2"	96-3/4"	13-1/2'	12.1	40.5

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

## DIMENSIONS

	Parallel Section	Flared Section
Overlap	3'	—
Rails:	3-1/8" wide	3-1/8" wide
Flange:	1-3/16" wide	1-3/16" wide
Ladder Width:	14-1/2" outside rails	14-1/2" outside rails at top
Ladder in Closed Position:	—	7-7/8" deep

# M7100-I SERIES Manhole Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**



## SPECIFICATIONS

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
M7108-1	8'	3.0	20.0
M7110-1	10'	3.7	24.0
M7112-1	12'	4.4	28.0
M7114-1	14'	5.2	32.0
M7116-1	16'	5.9	39.5

## DIMENSIONS

Rails:	3-5/16" wide	Rungs:	1-1/4"
Flange:	1-3/16" wide	Ladder Width:	12-3/8" outside shoes






# SPFOO-I/TPFOO-ISERIES Posting Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

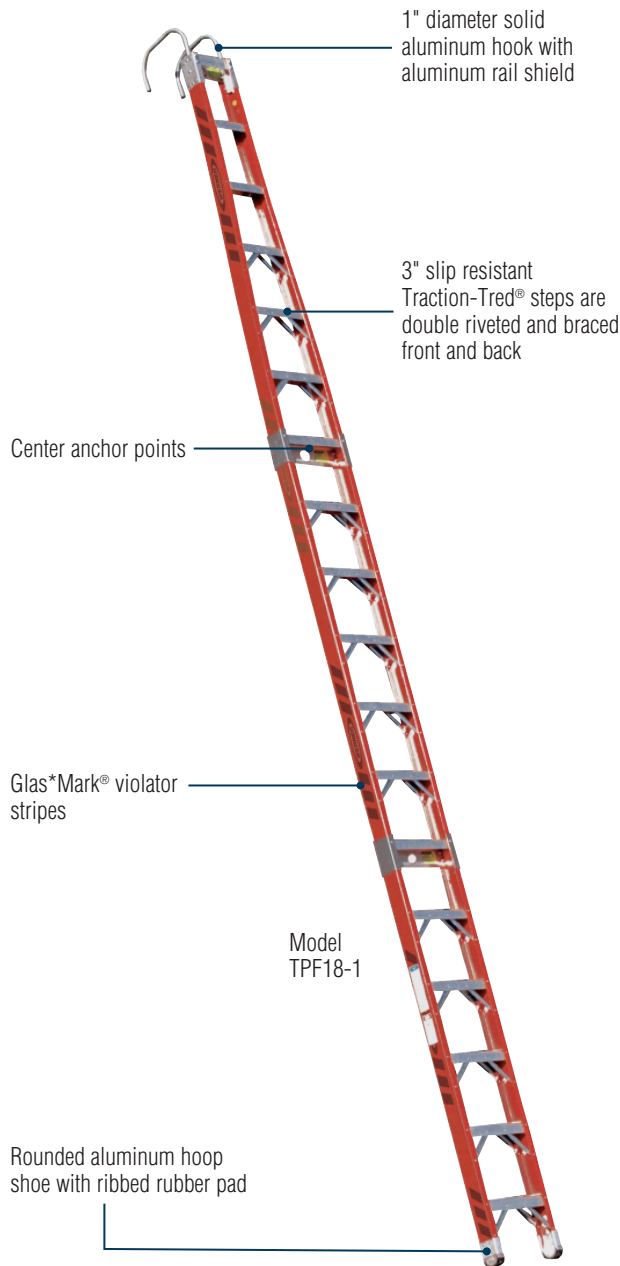

## SPECIFICATIONS

Model No.	Total Length	Length for Shipping	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
<b>Straight Posting Ladders (not shown above)</b>				
SPF14-1	14'	15'	6.0	38.0
SPF16-1	16'	17'	6.8	43.0
SPF18-1	18'	19'	7.6	49.0
SPF20-1	20'	21'	8.4	58.0
<b>Tapered Posting Ladders</b>				
TPF14-1	14'	15'	6.0	37.0
TPF16-1	16'	17'	6.8	42.0
TPF18-1	18'	19'	7.6	48.0
TPF20-1	20'	21'	8.4	57.0


## DIMENSIONS

Rails:	3-5/16" wide	Steps:	2-7/8" wide
Flange:	1-3/16" wide	Base Width:	14-5/8"

# S7700SERIES Interchangeable Parallel Sectional Ladder

**250lbs.** LOAD CAPACITY

**TYPE I**  
DUTY RATING

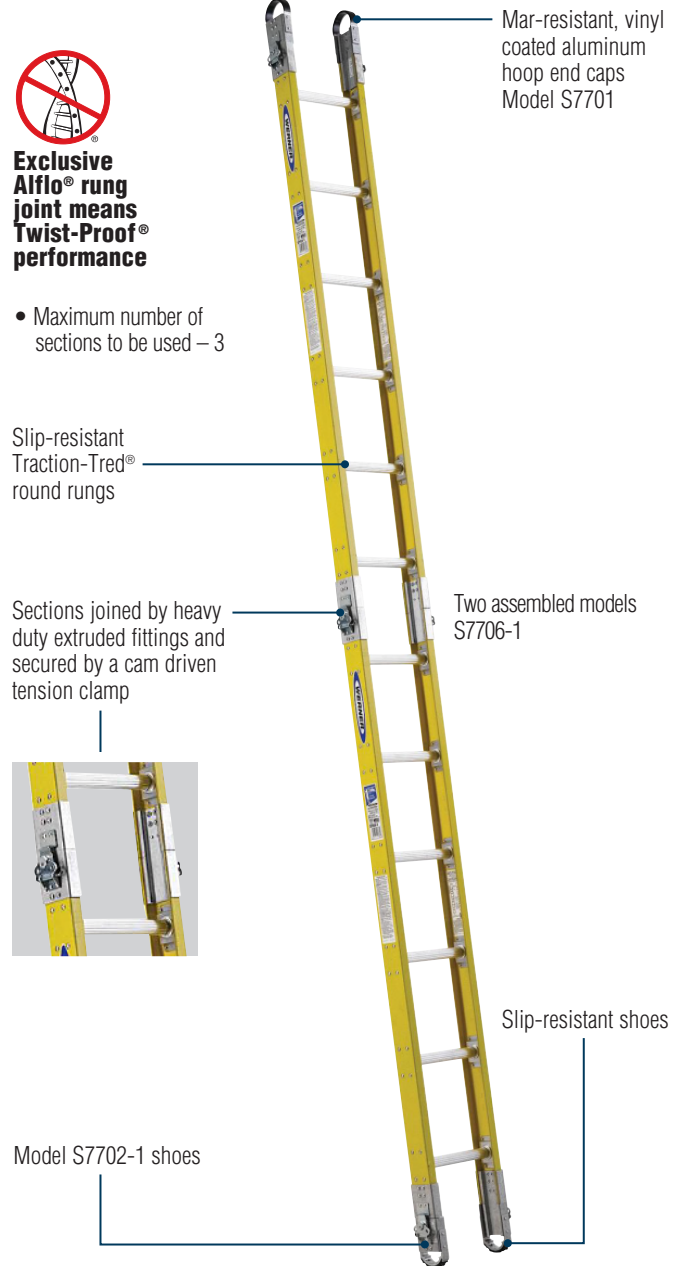

## SPECIFICATIONS

Model No.	Description	Top of Section	Bottom of Section	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
S7706-1	For manhole use - 6' length	12" wide	12" wide	2.1	15.5
<b>End Caps and Shoes</b>					
S7701	End cap (2 required)	N/A	N/A	0.1	1.5 ea.
S7702-1	Shoe with black EPDM pad (2 required)	N/A	N/A	0.1	1.5 ea.

## ASSEMBLY DESCRIPTION

Max. No. of Sections	Approx. Max. Assembled Length
(3) assembled 6' sections with (1) pair of end caps and (1) pair of shoes	19'

## DIMENSIONS

Rails:	3-5/16" wide
Flange:	1-3/16" wide
Rungs:	1-1/4" diameter



## 400SERIES Stepladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



Model 406

## T400SERIES Multi-Use Twin Stepladder®††

**375lbs.** LOAD CAPACITY PER SIDE

**TYPE IAA**  
DUTY RATING



Model T406

- Optional black molded pail shelf kit, model no. PK76-3

### SPECIFICATIONS

NOTE: Type IAA duty rating is for stepladders up to 12 ft.

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
404	4'	21-1/4"	30-1/8"	4.8	16.0
406	6'	24-3/4"	42-7/16"	8.1	24.0
408	8'	28-1/4"	54-3/4"	12.2	33.5
410	10'	31-3/4"	67"	17.0	43.5
412	12'	35-1/4"	79-3/8"	22.5	54.5

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

414	14'	38-5/8"	91-11/16"	28.2	65.0
416	16'	42-1/8"	104"	34.7	77.5

### DIMENSIONS

Top:	7" x 14"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1" wide

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T404	4'	21-1/4"	36-1/4"	5.0	21.5
T406	6'	24-3/4"	50-1/4"	8.8	31.0
T408	8'	28-1/4"	64-1/4"	13.3	42.0
T410	10'	31-3/4"	78-1/4"	18.7	55.0
T412	12'	35-1/4"	92-1/4"	25.0	69.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


### DIMENSIONS

Top:	8-1/4" x 14"	Steps:	3" wide
Rails:	3-1/8" wide	Flange:	1-1/8" wide

## P400SERIES Platform Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

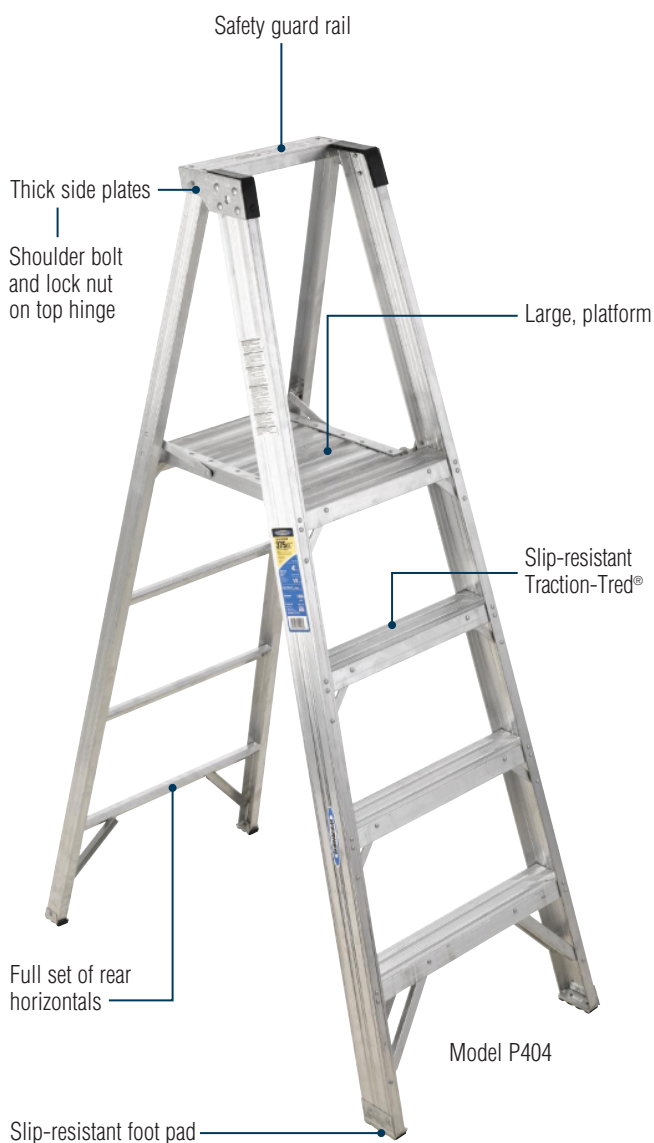

Model P404

- Internal spreaders on 8' and above

### SPECIFICATIONS NOTE: Type IAA duty rating is for platforms ranging in size from 4' to 8'

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P404	4'	6'	24-3/4"	42-1/16"	7.1	25.0
P406	6'	8'	28-1/4"	54-3/4"	10.1	33.5
P408	8'	10'	31-3/4"	79-1/2"	20.3	45.5

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

P410	10'	12'	35-1/4"	79-3/8"	20.3	54.5
P412	12'	14'	38-3/4"	91-11/16"	25.2	66.0
P414	14'	16'	42-1/4"	104"	31.1	79.5


### DIMENSIONS

Platform:	12-5/8" x 15"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-3/4" wide
Front Flange:	1-1/8" wide	Rear Flange:	1" wide

## 370SERIES Stepladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

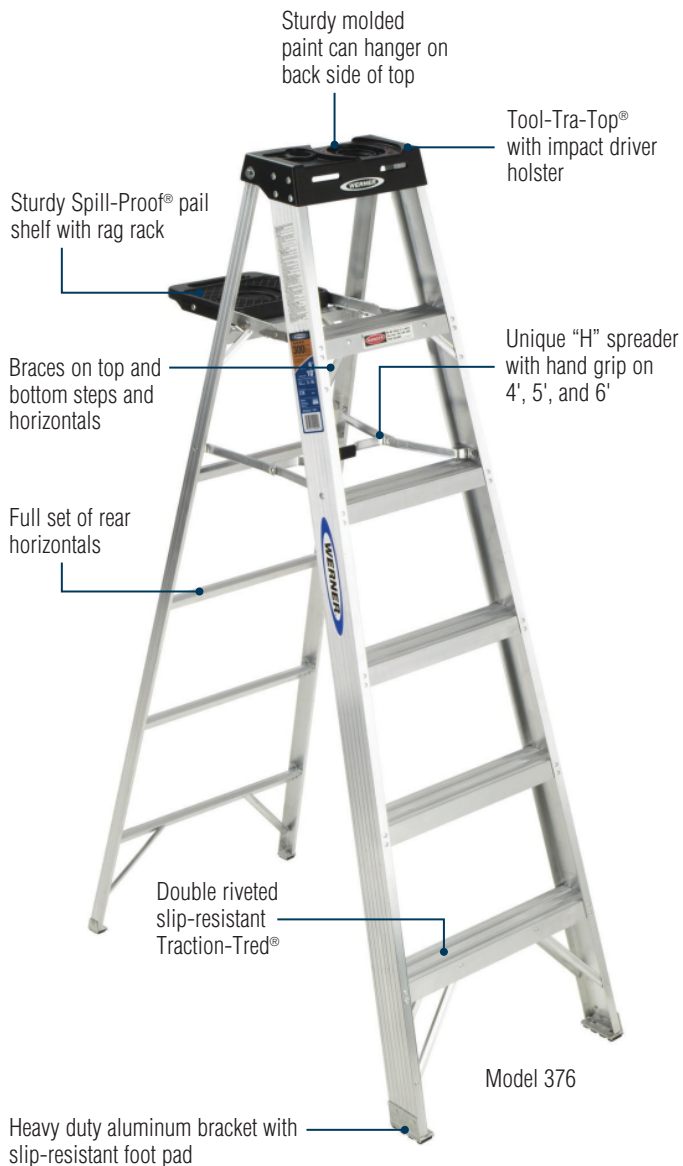

Model 376

- External Pinch-Proof™ spreaders on 3', 7', 8' and 10' models

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
373	3'	17-3/4"	23-3/8"	1.5	9.0
374	4'	19-1/2"	29-1/2"	2.1	11.0
375	5'	21-1/4"	35-3/4"	2.8	13.5
376	6'	23"	41-7/8"	3.5	15.5
378	8'	26-1/2"	54-1/4"	5.1	22.5
310	10'	30"	66-1/2"	7.0	31.0

### DIMENSIONS


Top:	5-1/8" x 12-1/8"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/4" wide
Front Flange:	7/8" wide	Rear Flange:	1" wide



## T370SERIES Multi-Use Twin Stepladder††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING

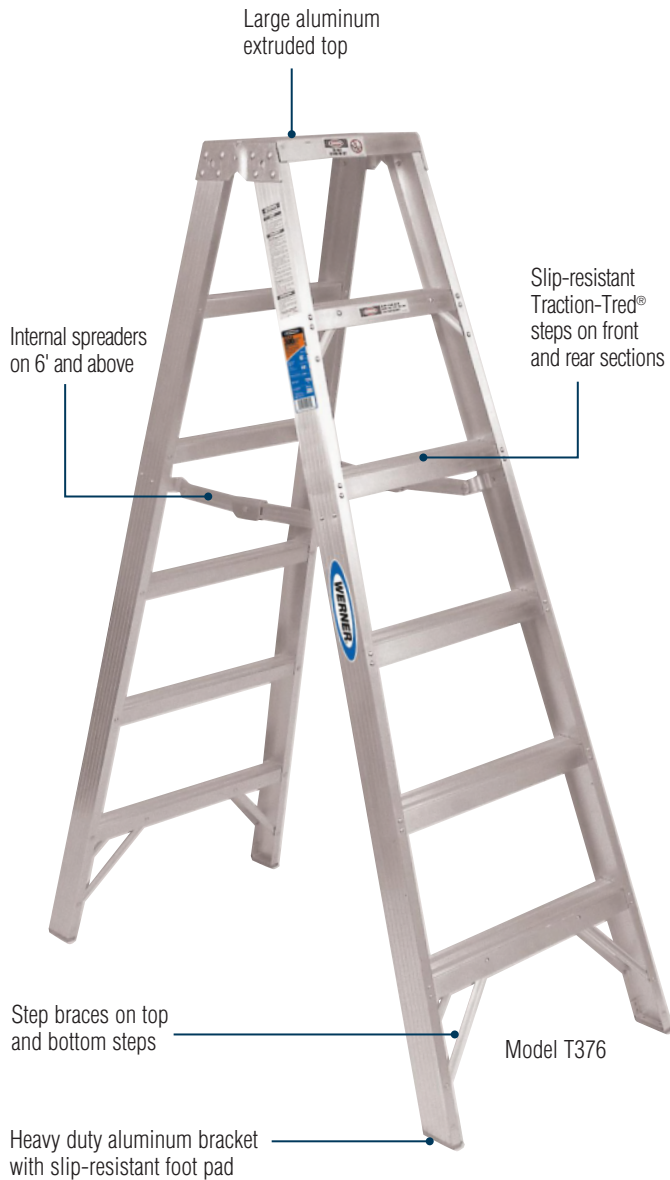

- External Pinch-Proof™ spreaders on 4' model

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T374	4'	21-1/4"	36"	3.5	14.5
T376	6'	24-3/4"	50"	5.7	21.5
T378	8'	28-1/4"	64"	8.2	31.0
T310	10'	31-3/4"	78"	11.1	43.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


### DIMENSIONS

Top:	8-1/4" x 14"	Steps:	3" wide
Rails:	3" wide	Flange:	7/8" wide

## P370SERIES Platform Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

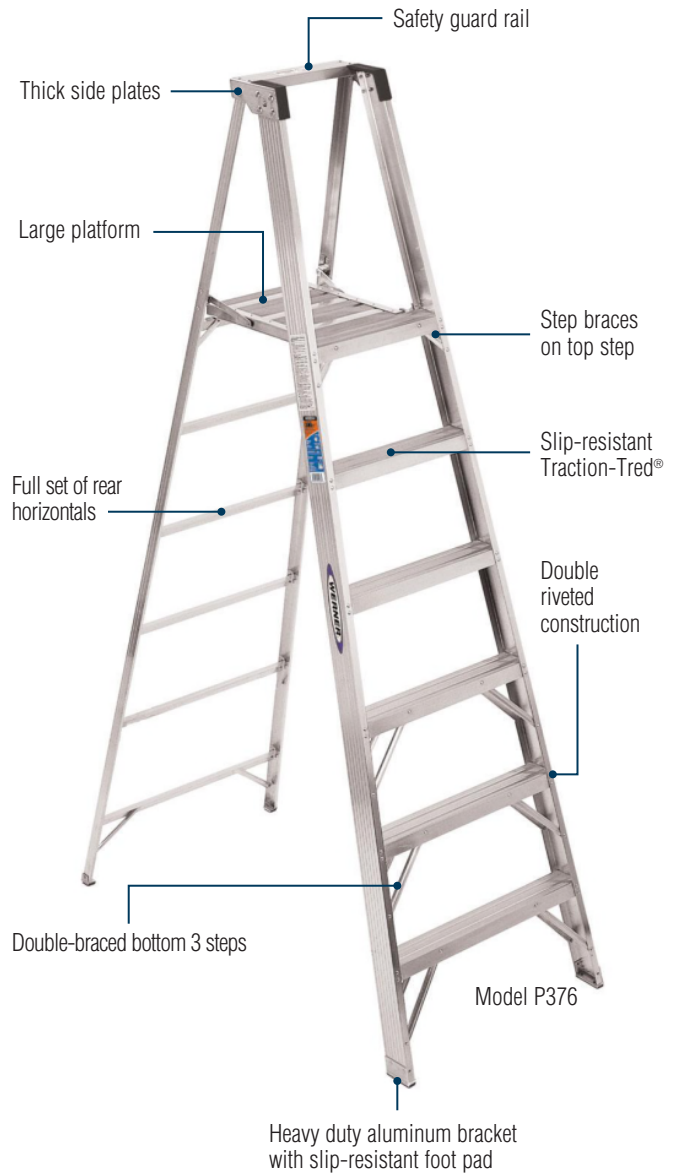

- External Pinch-Proof™ spreaders on 8' model

### SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
P372	2'	4'	21-1/4"	30"	3.0	12.0
P373	3'	5'	23"	36-1/4"	3.9	14.5
P374	4'	6'	24-3/4"	42-3/4"	4.9	17.0
P376	6'	8'	28-1/4"	54-3/4"	7.1	23.0
P378	8'	10'	31-3/4"	67"	8.4	32.0

### DIMENSIONS

Platform:	12-5/8" x 18"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/4" wide
Front Flange:	7/8" wide	Rear Flange:	1" wide



# PT370SERIES Stockr's Ladder®††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING



Model PT374

- Available with 4 casters to allow for easy 360° mobility
- Easy to handle and folds to a 10" width for storage
- Unique combination of one person, two person†† and platform ladder use
- Internal Pinch-Proof™ aluminum spreaders on 8' and 10' models

## SPECIFICATIONS

Model No.	Height (Size) to Platform	Rail Length	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Model No. with Casters	Approx. Shipping Wt. Lbs.
PT372	2'	4'	21-1/4"	36"	5.1	21.0	PT372-4C	27.5
PT374	4'	6'	24-3/4"	50-1/2"	8.9	27.0	PT374-4C	33.5
PT376	6'	8'	28-1/4"	65-1/4"	13.5	36.0	PT376-4C	42.5
PT378	8'	10'	31-3/4"	81-1/2"	19.0	46.5	PT378-4C	54.0
PT310	10'	12'	34-1/4"	96"	24.5	58.5	PT310-4C	66.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


## DIMENSIONS

Platform:	12-3/4" x 22"	Steps:	3" wide
Rails:	3" wide	Flange:	3/4" wide

# SH378MODEL Shelf Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

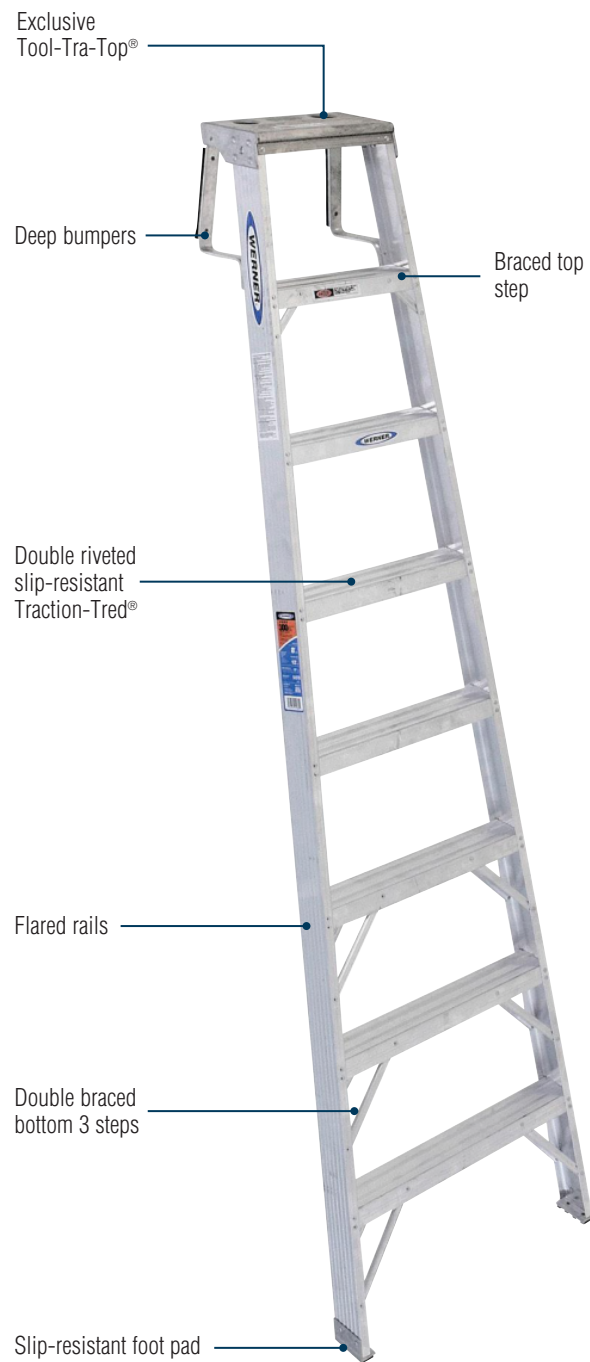

## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
SH378	8'	28-1/4"	3.9	15.5


## DIMENSIONS

Top:	7" x 14"	Steps:	3" wide
Rails:	3" wide	Flange:	7/8" wide

## 360SERIES Stepladder

**250lbs.** LOAD CAPACITY

**TYPE I**  
DUTY RATING

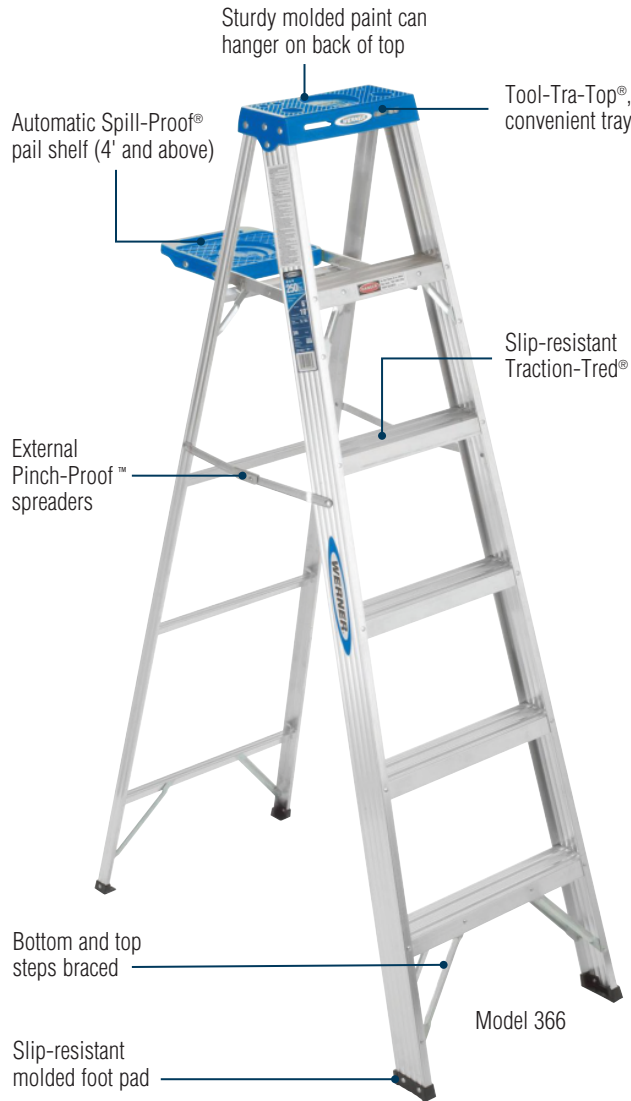

Model 366



### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
363	3'	17"	23-1/4"	1.7	8.0
364	4'	18-1/2"	29-1/4"	2.4	10.5
365	5'	20"	35-1/2"	3.1	12.5
366	6'	21-1/2"	41-5/8"	3.9	14.5
368	8'	24-1/2"	54"	5.7	21.5

### DIMENSIONS

Top:	5" x 12-3/8"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/8" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide

## 350SERIES Stepladder

**225lbs.** LOAD CAPACITY

**TYPE II**  
DUTY RATING



Model 356















### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
354	4'	18-1/2"	29-1/4"	2.4	10.0
355	5'	20"	35-1/2"	3.1	12.0
356	6'	21-1/2"	41-5/8"	3.9	13.5

### DIMENSIONS

Top:	4-5/8" x 12-1/2"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/8" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide

# ALUMINUM STEPLADDER COMPARISON CHART


Features and Benefits	400 SERIES	T400 SERIES	P400 SERIES	370 SERIES	T370 SERIES	P370 SERIES	PT370 SERIES	360 SERIES	350 SERIES
	TYPE IAA/IA	TYPE IAA	TYPE IAA/IA	TYPE IA	TYPE IA	TYPE IA	TYPE IA	TYPE I	TYPE II
 Slip-resistant foot pad	●	●	●	●	●	●	●	●	●
 Slip-resistant Traction-Tred® steps	●	●	●	●	●	●	●	●	●
 Dual drill HolsterTop®	●								
 External spreaders	4', 5', 8' models	4', 6' models		3', 8', 10' models				●	●
Designed for one or two person jobs		●			●		●		
 Knee-braced top & bottom steps	●	●	●	●	●	●	●	●	●
 Aluminum top	●	●	●		●	●			
Full set of rear horizontals	●		●	●		●			
 Spill-Proof® pail shelf with rag rack				●				●	●
 Tool-Tra-Top®	●			●				●	●
 Safety guard rail			●			●	●		
 Platform for comfortable work area			●			●	●		
 Paint can hanger on top				●				●	●
 H-spreader for one-handed carry & close				●					



## SSA00SERIES Step Stand

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING

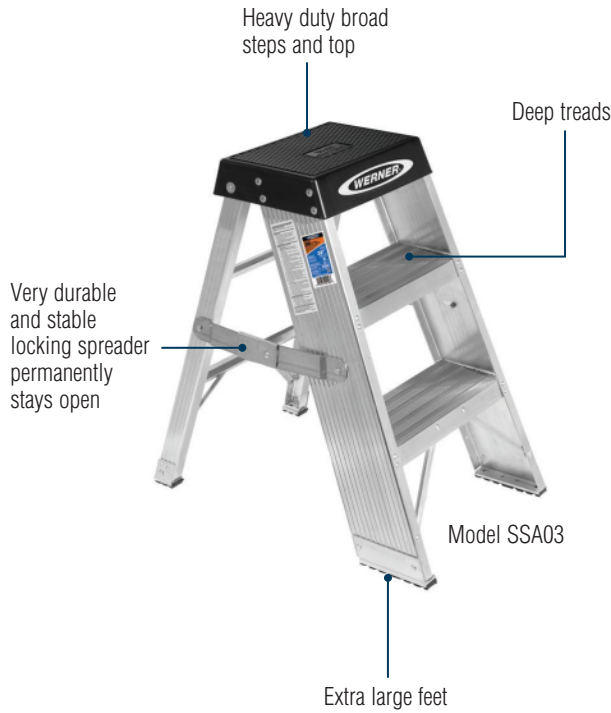

- Heavy duty 9in x 14in top provides large standing surface
- Broad, 6 inch steps feature deep treads for slip resistance
- Very durable and stable locking spreader permanently stays open
- Extra-large feet for use on gratings

### SPECIFICATIONS

Model No.	Size	Max. Standing Height	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
SSA02	2'	20"	17"	21"	2.6	16.0
SSA03	3'	30"	18-3/4"	27-1/2"	4.0	21.0

### DIMENSIONS

Top:	9" x 14"	Steps:	6" wide
Front Rails:	6" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-1/8" wide	Rear Flange:	1-3/16" wide

## 150BMODEL Step Stool

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



- Molded top provides large standing platform
- External Pinch-Proof™ spreaders
- Slip-resistant Traction-Tred® steps
- Molded vinyl foot pads riveted to rails
- Bottom step has durable aluminum braces
- Ideal for construction, plant, office and home applications

### SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
150B	2'	17"	19"	1.9	5.5


### DIMENSIONS

Top:	6" x 12-3/8"	Steps:	3" wide
Front Rails:	3" wide	Rear Rails:	1-1/8" wide
Front Flange:	3/4" wide	Rear Flange:	1" wide

# TW370-30SERIES Portable Work Stand††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING

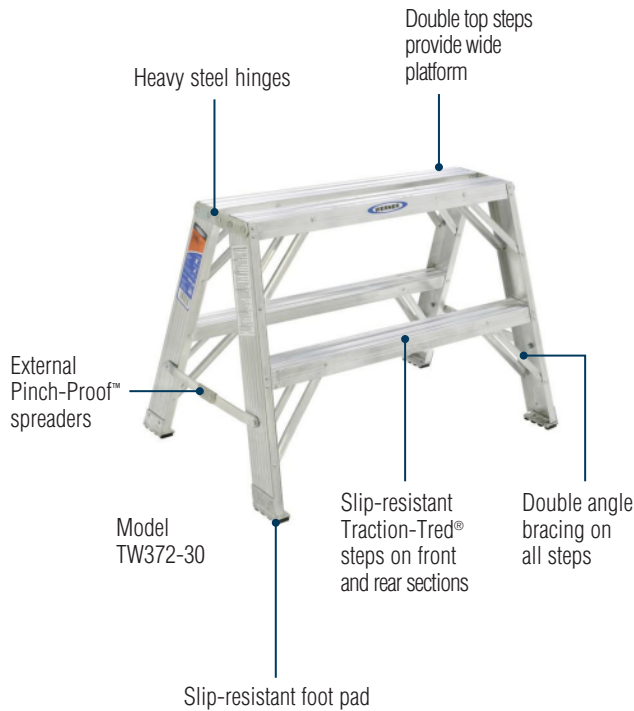

- Double top steps provide wide platform
- Heavy steel hinges
- Slip-resistant Traction-Tred® steps on front and rear sections
- External Pinch-Proof™ spreaders for easy opening and closing
- Double angle bracing on all steps
- Mar-resistant feet for slip-resistance on concrete, wood and vinyl floors
- Extra wide for versatile use as work stand, stage or material support
- Lightweight and portable
- Design for one or two-person jobs
- Maximum load per side, including person and materials, shall not exceed duty rating of ladder

## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
TW372-30	2'	33"	22"	4.0	12.5
TW373-30	3'	34-3/4"	29"	5.6	17.5
TW374-30	4'	36-1/2"	36"	7.8	24.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.


## DIMENSIONS

Top:	8" x 30"	Steps:	3" wide
Rails:	3" wide	Flange:	7/8" wide

# MODEL Twin Step Stool††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING

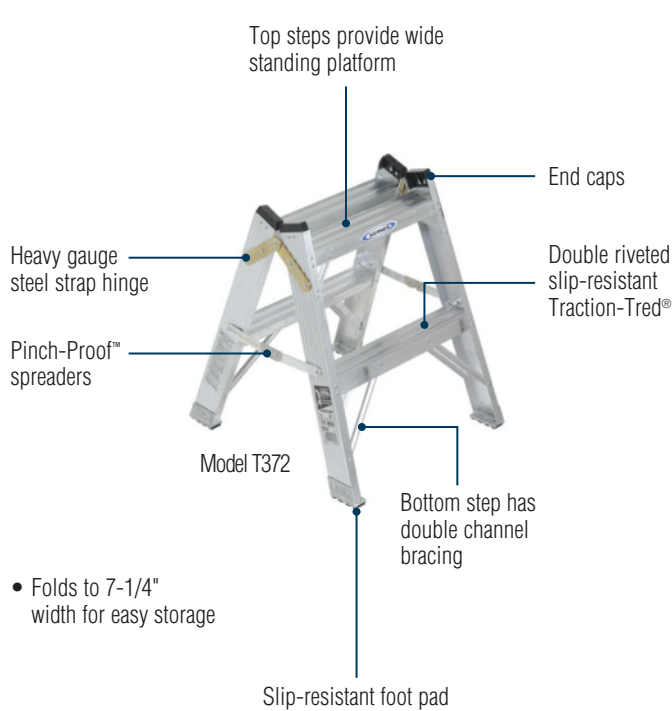

- Folds to 7-1/4" width for easy storage

- Top steps provide wide standing platform
- Heavy gauge steel strap hinge
- Double riveted slip-resistant Traction-Tred® steps
- Fully braced steps
- Folds to 7.25 inch width for easy storage
- Design for one or two-person jobs.
- Maximum load per side, including person and materials, shall not exceed duty rating of ladder
- Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder

## SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
T372	2'	21-1/4"	23-3/8"	2.3	9.0

††Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

## DIMENSIONS

Rails:	3" wide	Flange:	7/8" wide
Steps:	3" wide		

Note: Planks or platforms shall be secured to the step stools. The ends of each plank or platform shall extend beyond the outside edge of each step stool by a minimum of 4 inches and a maximum of 10 inches.



## 500-SERIES Round Rung Straight Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



Exclusive Alflo® rung joint means Twist-Proof® performance

Extra heavy duty I-beam rails

Traction-Tred® deeply serrated aluminum round rungs



Model 508-1

### SPECIFICATIONS

NOTE: Type IAA duty rating is for single ladders up to 16 ft.

Model No.	Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
508-1	8'	2.9	16.5
510-1	10'	3.6	20.0
512-1	12'	4.3	24.0
514-1	14'	5.0	27.5
516-1	16'	5.7	37.0

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

518-1	18'	6.4	41.0
520-1	20'	7.1	45.5
524-1	24'	14.0	60.5

### DIMENSIONS

	Rails:	Flange:	Round Rungs:	Base Width:
8' to 14'	3" wide	1-3/16"	1-1/4"	16-7/8"
16' to 20'	3" wide	1-1/4"	1-1/4"	16-7/8"
24'	4" wide	1-3/8"	1-1/4"	20-5/8"

## D500-2SERIES D-Rung Extension Ladder

**375lbs.** LOAD CAPACITY

**TYPE IAA**  
DUTY RATING



Exclusive Alflo® rung joint means Twist-Proof® performance

4-piece pulley with 3/8" rope. 36' to 48' models have heavy duty rope and double pulley system

Slip-resistant Traction-Tred® D-rungs

Base and fly separate easily for use as an extension or two single sections

Internal guides

Heavy duty, self-aligning, free-swinging shoe with slip-resistant tread and replaceable steel spur plate



Model D520-2

Mar-resistant end caps notched for easy separation of sections

Extra heavy duty I-beam rails

Interlocking side rails

Rugged spring loaded locks

Molded slip-resistant shoes

### SPECIFICATIONS

NOTE: Type IAA duty rating is for extension ladders up to 32 ft.

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D520-2	20'	17'	8.8	42.0
D524-2	24'	21'	10.4	49.0
D528-2	28'	25'	12.1	65.5
D532-2	32'	29'	13.8	74.0

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING

D540-2	40'	35'	17.0	99.5
D544-2	44'	39'	21.4	131.0
D548-2	48'	43'	23.3	142.5

### DIMENSIONS

Rails:	3-1/4" wide	Rungs:	1-3/4"
Flange:	1-3/16" wide (20' & 24') 1-1/4" wide (28' to 48')	Base Section Width:	19-1/8" outside shoes 20-1/8" (44' & 48')

## D1500-2/D1500-ISERIES D-Rung Extension/Straight Ladder

**300lbs.** LOAD CAPACITY

**TYPE IA**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**


Thick guide bracket engages full fly rail

Smooth operating pulley design

Slip-resistant Traction-Tred® D-rungs

Guide brackets

Rugged shoe rests flat or is held in spur position with Shu-Lok® feature

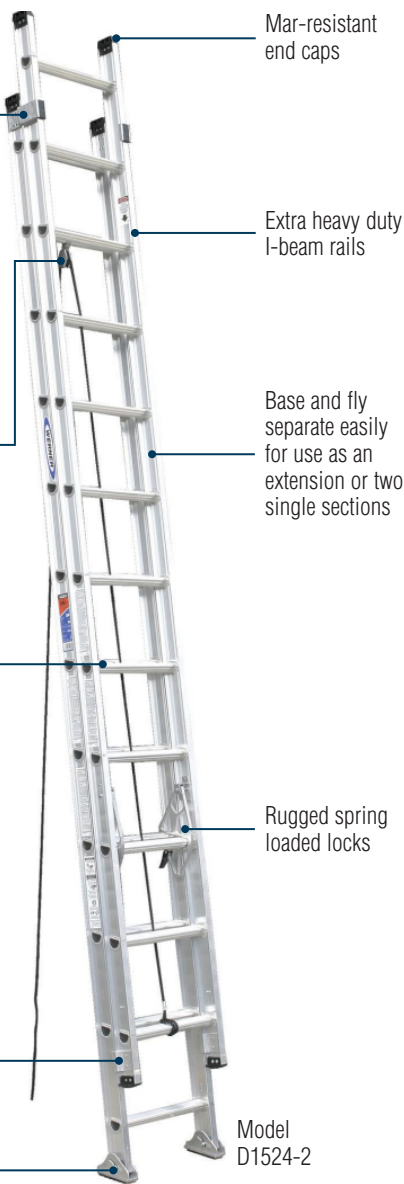

Mar-resistant end caps

Extra heavy duty I-beam rails

Base and fly separate easily for use as an extension or two single sections

Rugged spring loaded locks

Model D1524-2

### SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.	Single Ladder Model No.	Approx. Total Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1516-2‡	16'	13'	6.2	30.5	D1508-1	8'	3.6	14.5
D1520-2	20'	17'	7.7	37.0	D1510-1	10'	4.5	17.5
D1524-2	24'	21'	9.2	45.0	D1512-1	12'	5.4	21.5
D1528-2	28'	25'	10.7	56.0	D1514-1	14'	6.2	27.0
D1532-2	32'	29'	12.2	67.0	D1516-1	16'	7.1	32.5
D1536-2	36'	32'	13.7	80.0	D1518-1	18'	8.0	38.5
D1540-2	40'	35'	15.2	89.5	D1520-1	20'	8.9	43.5

‡ Note: D1516-2 is not equipped with rope and pulley

### DIMENSIONS

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1-1/8" wide	Base Width:	18-1/8" outside rails

## 560-3MODEL Round Rung Extension Ladder

**250lbs.** LOAD CAPACITY


**TYPE I**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

Heavy duty rope and double pulley system lift fly and intermediate sections

Bottom base section with top fly section can be used as a 40' extension ladder

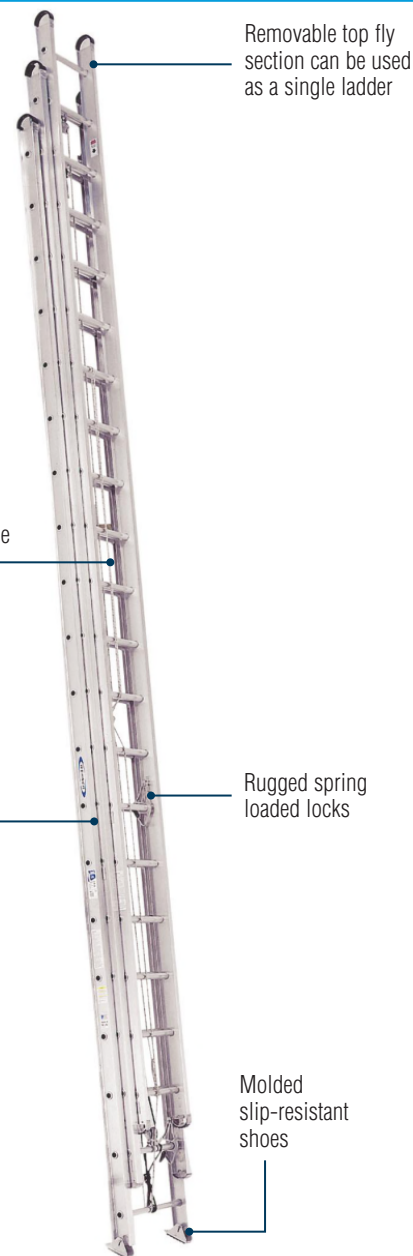

Removable top fly section can be used as a single ladder

Rugged spring loaded locks

Molded slip-resistant shoes

### SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
560-3	60'	47'	26.8	179.0

### DIMENSIONS

Rails:	4" wide	Rungs:	1-1/4"
Flange:	2" wide (base & intermediate sections) 1-3/8" wide (top fly section)	Base Width:	23-1/2"



## D1800-2EQ/D1700-2SERIES Ext Ladder w/Integrated Leveling


**250lbs.** LOAD CAPACITY

**TYPE I**  
DUTY RATING




Exclusive Alflo® rung joint means Twist-Proof® performance

**THE Equalizer®**  
ELIMINATES UNEVEN GROUND



Factory installed adjustable EverLevel® leveling system exceeds OSHA and ANSI requirements

Easily adjustable in 3/8" increments up to 8-1/4"



Convenient built-in bubble level



Dual action foot for use on hard or penetrable surfaces

Lightweight aluminum

Slip-resistant Traction-Tred® D-rungs

Heavy duty spring-loaded locks



Model D1820-2EQ

### SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1816-2EQ‡	16'	13'	6.5	31.5
D1820-2EQ	20'	17'	8.1	37.5
D1824-2EQ	24'	21'	9.6	45.5
D1828-2EQ	28'	25'	11.2	56.0

**225lbs.** LOAD CAPACITY

**TYPE II**  
DUTY RATING

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1716-2EQ‡	16'	13'	6.5	27.5
D1720-2EQ	20'	17'	8.1	32.5
D1724-2EQ	24'	21'	9.6	39.0
D1728-2EQ	28'	25'	11.2	48.5

‡ Note: D1816-2EQ and D1716EQ are not equipped with rope and pulley

### DIMENSIONS

Rails:	3" wide	Fly Width:	14-1/4" outside rails
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails
Rungs:	1-3/4"		(20-3/4" to outside of feet)

## D1300-2SERIES D-Rung Extension Ladder

**250lbs.** LOAD CAPACITY

**TYPE I**  
DUTY RATING



Exclusive Alflo® rung joint means Twist-Proof® performance

Smooth operating pulley

Slip-resistant Traction-Tred® D-rungs

Durable shoe rests flat or is held in spur position with Shu-Lok® feature



Model D1320-2

Mar-resistant end caps

Interlocking side rails

Heavy duty modified I-beam side rails

Heavy duty spring loaded locks

### SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1316-2‡	16'	13'	5.8	26.0
D1320-2	20'	17'	7.2	32.5
D1324-2	24'	21'	8.6	40.0
D1328-2	28'	25'	10.0	50.5
D1332-2	32'	29'	11.5	63.5
D1336-2	36'	32'	13.0	77.5
D1340-2	40'	35'	14.4	85.5

‡ Note: D1316-2 is not equipped with rope and pulley

### DIMENSIONS

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails




# D1200-2SERIES D-Rung Extension Ladder

**225lbs.** LOAD CAPACITY

**TYPE II**  
DUTY RATING



**Exclusive Alflo® rung joint means Twist-Proof® performance**

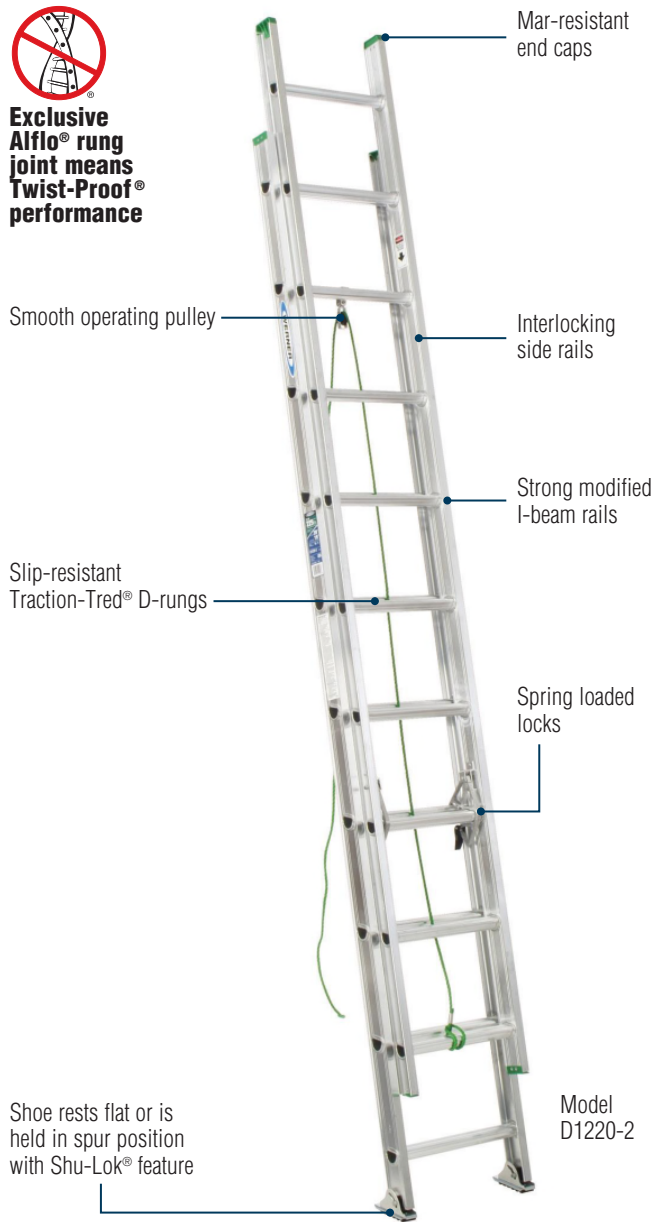

Model D1220-2

## SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1216-2†	16'	13'	5.8	22.0
D1220-2	20'	17'	7.2	27.0
D1224-2	24'	21'	8.6	33.5
D1228-2	28'	25'	10.0	43.0
D1232-2	32'	29'	11.5	54.0
D1236-2	36'	32'	13.0	62.5
D1240-2	40'	35'	14.4	73.5

† Note: D1216-2 is not equipped with rope and pulley

## DIMENSIONS

Rails:	3" wide	Rungs:	1-3/4"
Flange:	1" wide	Base Width:	17-3/8" outside rails

# D1200-3SERIES D-Rung Compact Extension Ladder

**225lbs.** LOAD CAPACITY

**TYPE II**  
DUTY RATING




**Exclusive Alflo® rung joint means Twist-Proof® performance**



**3 PIECE COMPACT DESIGN**  
Same reach as a standard extension ladder but stores less space than comparable piece extension ladder



16 ft. Fits in most cars for easy transport

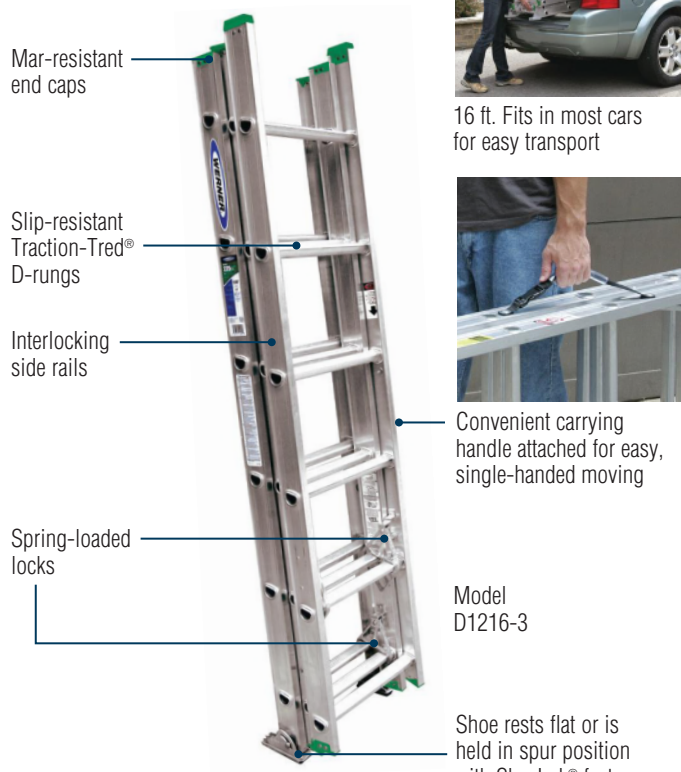

Model D1216-3

## SPECIFICATIONS

Model No.	Total Length of Sections	Total Length in Storage Position		Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
		2 vs. 3 piece*	2 vs. 3 piece*			
D1216-3	18'	8' / 6"	13'	13'	5.9	26.5
D1224-3	27'	12' / 9"	21'	21'	8.7	38.5

\* Total Length of ladder in storage position, comparison of Standard 2 - piece vs. New 3 - piece extension ladder.


## DIMENSIONS

Rails:	3" wide	Fly Width:	14-1/4" outside rails
Flange:	1-1/16" wide	Base Width:	17-3/8" outside rails
Rungs:	1-3/4"		(20-3/4" to outside of feet)

## D1100-2SERIES D-Rung Extension Ladder

**200lbs.** LOAD CAPACITY


**TYPE III**  
DUTY RATING

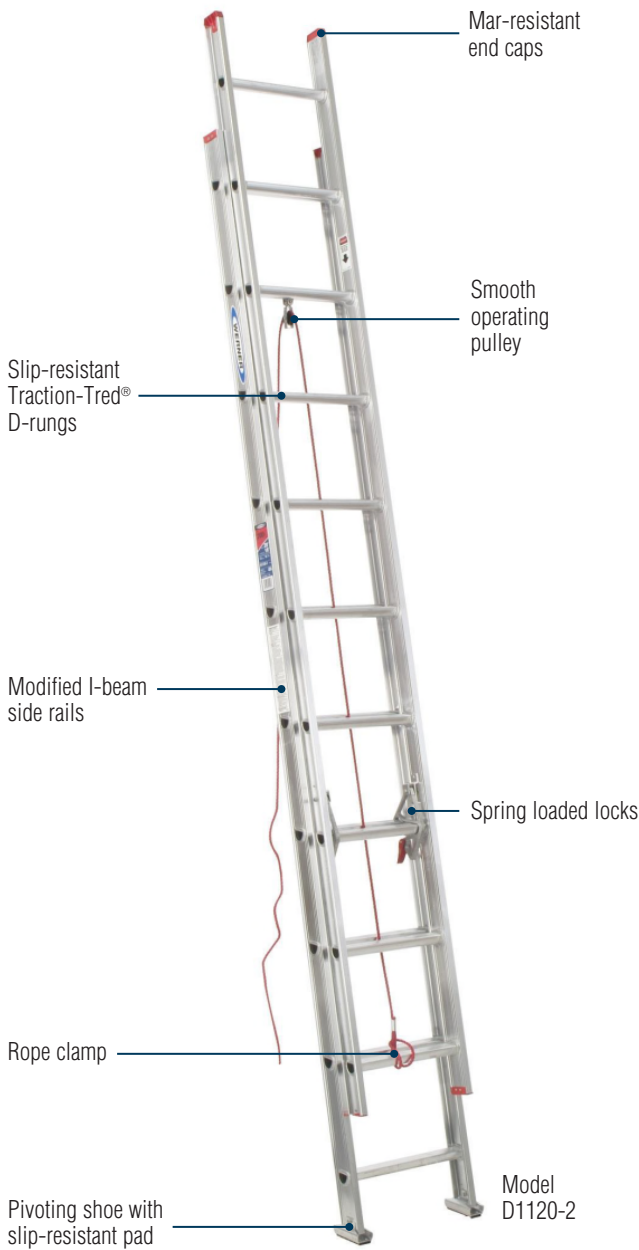

## D716-2MODEL D-Rung Extension Ladder

**200lbs.** LOAD CAPACITY

**TYPE III**  
DUTY RATING

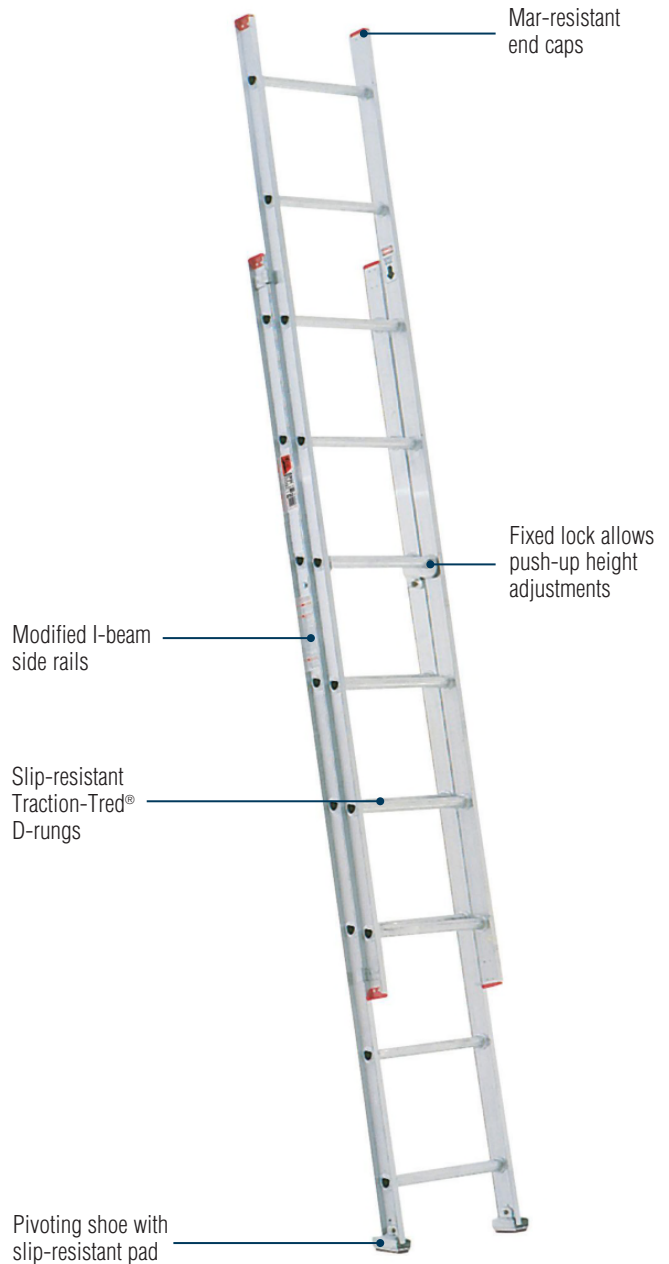

### SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D1116-2‡	16'	13'	4.9	18.5
D1120-2	20'	17'	6.2	23.0
D1124-2	24'	21'	7.4	30.0
D1128-2	28'	25'	9.0	38.5

‡ Note: D1116-2 is not equipped with rope and pulley

### DIMENSIONS

Rails:	2-3/4" wide (16' & 20') 3" wide (24' & 28')	Rungs:	1-1/2"
Flange:	15/16" wide	Base Width:	16" outside rails














### SPECIFICATIONS

Model No.	Total Length of Sections	Max. Working Length	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
D716-2	16'	13'	4.6	17.5

### DIMENSIONS

Rails:	2-1/2" wide	Rungs:	1-1/4"
Flange:	3/4" wide	Base Width:	15-3/4" outside rails

# ALUMINUM EXTENSION LADDER COMPARISON CHART

Features and Benefits	D500-2 SERIES	D1500 SERIES	D1800-2EQ SERIES	D1300-2 SERIES	D1700-2EQ SERIES	D1200-2 SERIES	D1100-2 SERIES	D716-2 MODEL
	TYPE IAA/IA	TYPE IA	TYPE I	TYPE I	TYPE II	TYPE II	TYPE III	TYPE III
 Rope clamp ties rope to rung	●	●	●	●	●	●	●	
 Heavy duty shoe with slip-resistant tread and spur plate	●							
Removable sections for use as a single ladder	●	●	●	●	●	●	●	
 External guide brackets		●						
 Pivoting shoe							●	●
 Slip-resistant shoe with Shu-lok® feature and spur plate		●	●	●	●	●		
 Interlocking side rails	●		●	●	●	●	●	
 Rope and pulley system	●	●	●	●	●	●	●	
 Spring loaded locks	●	●	●	●	●	●	●	
 Modified I-beam rails	●	●	●	●	●	●	●	●
 Alflo® rung joint for Twist-Proof® performance	●	●	●	●	●	●	●	●
 Mar-resistant end caps	●	●	●	●	●	●	●	●
 Slip-resistant Traction-Tred® D-rungs	●	●	●	●	●	●	●	●
 Integrated Leveling			●		●			



**MTSERIES** Telescoping MultiLadder††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING



**MIA SERIES** Folding Multi-Ladder††

**300lbs.** LOAD CAPACITY PER SIDE

**TYPE IA**  
DUTY RATING



- Telescoping design for maximum versatility

**SPECIFICATIONS**

Model No.	Stepladder Height	Extension Height	Stair Height	Scaffold Height	Wall Height	Approx. Cu. Ft. Per Unit	Approx. Ship Wt. Lbs.
MT-13	3' to 5'	7' to 11'	3' to 5'	1'-1" to 2'	4' to 5'	5.9	31.5
MT-17	4' to 7'	9' to 15'	4' to 7'	1'-1" to 3'	5' to 7'	6.9	39.5
MT-22	5' to 9'	11' to 19'	5' to 9'	1'-1" to 3'	6' to 9'	10.8	47.0
MT-26	6' to 11'	13' to 23'	6' to 11'	1'-1" to 3'	7' to 11'	12.3	62.6

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Rails:	2-5/8" wide	Rungs:	1" wide
Flange:	1" wide		

- Shippable by ground parcel services
- Set-up of some positions requires additional equipment, not included.

**SPECIFICATIONS**

Model No.	Closed Height	Scaffold Height	Stepladder Height	Straight Ladder Length	Approx. Cu. Ft. Per Unit	Approx. Ship Wt. Lbs.
M1A-6-12B	40-5/8"	3'	6'	12'	4.0	33.5
M1A-8-16B	52-5/8"	4'	8'	16'	5.2	39.5

†† Designed for one or two person jobs. Note: When used as a double stepladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

Rails:	2-1/2" wide	Rungs:	1-1/4" multi-directional round type
Flange:	1" wide		


## AP-20SERIES Work Platform

**225lbs.** LOAD CAPACITY



## AP-25MODEL Work Platform

**300lbs.** LOAD CAPACITY

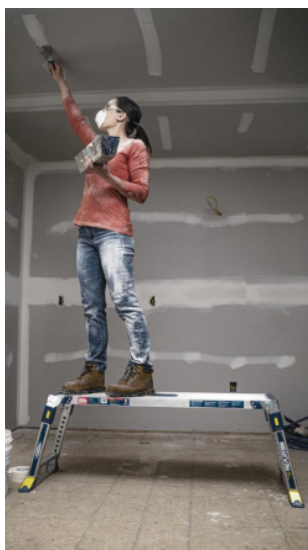

Work comfortably along walls and windows. Ideal for painting.



EASY-GRAB handles make it simple to carry your platform quickly and safely

### SPECIFICATIONS

Model No.	Height	Width	Depth	Approx. Cu. Ft.	Approx. Shipping Wt. Lbs.
AP-20*	20-9/16"	50-1/4"	15-5/8"	2.1	12.1
AP-20-MP6‡	41"	16-5/8"	35-3/4"	14.1	75.0

\* Note: Dimensions of fully open individual unit ‡ Note: Dimensions for packaged unit of 6

### DIMENSIONS

Top Deck:	39-1/2" x 12"	Highest Standing Level:	20-9/16"
-----------	---------------	-------------------------	----------

### SPECIFICATIONS

Model No.	Height	Width	Depth	Approx. Cu. Ft.	Approx. Shipping Wt. Lbs.
AP-25*	20-1/32"	52-13/32"	15-5/16"	1.5	14.8

\* Note: Dimensions of fully open individual unit

### DIMENSIONS

Top Deck:	45" x 12"	Highest Standing Level:	20"
-----------	-----------	-------------------------	-----

## AH SERIES Aluminum Folding Attic Ladder

**375lbs.** LOAD CAPACITY

STANDARD / EXTRA WIDE OPENINGS



Model AH2510

Step-by-Step Installation Made Easy

**Online Video**

[werneratticladders.com](http://werneratticladders.com)

Adjustable feet for easy installation and correct fit

- Lightweight – easy to open, close and install
- Attractive – will not splinter, decay or rust

### SPECIFICATIONS

Model No.	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
AH2210	22-1/2" x 54"	7'8" to 10'3"	14-1/8"	6.8	48.5
AH2510	25" x 54"	7'8" to 10'3"	17-1/8"	7.6	52.0
AH2512	25" x 66"	10'5" to 12'	17-1/8"	9.2	58.5

### DIMENSIONS

Rails:	2-3/8" wide	Steps:	3" wide
Flange:	1-1/2" wide		

## AA MODEL Compact Aluminum Attic Ladder

**250lbs.** LOAD CAPACITY

BUILT FOR SMALL OPENINGS




Step-by-Step Installation Made Easy

**Online Video**

[werneratticladders.com](http://werneratticladders.com)

Non-marring feet

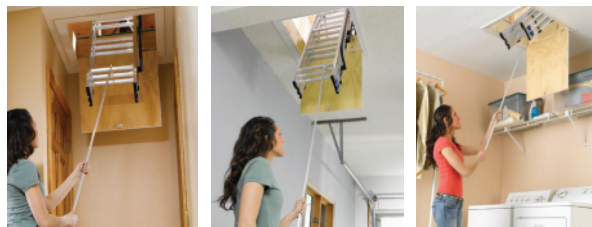

Hallways

Garages

Tight Spaces

### SPECIFICATIONS

Model No.	Rough Opening Width x Length	Floor to Floor Height Range	Approx. Ladder Width	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
AA1510	18" x 24" Minimum	7' to 9'10"	12-1/8"	2.55	15.5

### DIMENSIONS

Rails:	5/8" x 2-1/8" wide	Steps:	1-3/16" wide
--------	--------------------	--------	--------------

# WSERIES Wood Folding Attic Ladder

**250lbs.** LOAD CAPACITY

STANDARD / EXTRA WIDE OPENINGS



Step-by-Step Installation Made Easy

**Online Video**

[werneratticladders.com](http://werneratticladders.com)

## SPECIFICATIONS

Model No.	Rough Opening Width x Length	Floor to Ceiling Height Range	Approx. Ladder Width	Approx. Shipping Wt. Lbs.
W2508	25" x 54"	7' to 8'9"	16-3/4"	51.2
W2510	25" x 54"	8'9" to 10'4"	16-3/4"	53.9
WU2210	22.5" x 54"	8' to 10'	14-1/4"	59

## NOMINAL DIMENSIONS

	Actual Lumber Size	Rough Lumber Size
Rails:	3/4" x 3-1/2"	1" x 4"
Grooved Steps:	3/4" x 3-1/2"	1" x 4"



## ATTIC LADDER COMPARISON CHART

Product Advantages	AH SERIES	AA SERIES	WSERIES
Material	Aluminum	Aluminum	Wood
Style	Folding	Sliding	Folding
Size	8 ft., 10 ft., 12 ft.	7' - 9' 10"	8 ft., 10 ft.
Load Capacity	375 lbs.	250 lbs.	250 lbs.
Ceiling Height Range	7' to 12'	7' to 9' 10" (floor to floor)	7' to 10' 4"
Locking Device	Gas Strut	N/A	Spring
Opening Device	Rope	Push/Pull Rod	Rope
Door Material	Plywood	Not Included (Door hardware included)	Plywood
Frame Material	Pine	N/A	Pine
Full Width Door Hinge	Yes	N/A	Yes
Metal-to-Metal Rail Hinge	Yes	N/A	Yes
Requires Cutting Rail	Yes	No	Yes
Separate Foot Attachment	Yes	No	No
Number of People for Installation	Two	One	Two
Step Depth	3"	1-3/16"	3-1/2"
Finished Rails with Eased Edges	2-3/8" wide	2-1/8" wide	3-1/2" wide
Approximate Shipping Weight	48-58 lbs.	15.5 lbs.	48-54 lbs.

## PS-48MODEL Portable Scaffold

**500lbs.** LOAD CAPACITY\*

### MULTIPLE WORKING HEIGHTS



Mar-resistant wheels  
High grade wheels prevent marring by locking securely into place



Multi-use S-Hooks make transportation easy and are ToolLasso® ready



Extra wide 10" plank for secure standing and comfort

- Versatile; can be used as push cart, storage shelf or work bench
- \*250 lbs. per plank (500 lbs. combined)

### SPECIFICATIONS

Model No.	Height	Width	Depth	Approx. Cu. Ft Per Packaged Unit	Approx. Shipping Wt. Lbs.
PS-48	50-1/8"	46-1/8"	25-1/2"	3.4	60.0

### PLANK DIMENSIONS

	Length	Width
Narrow Plank	46"	6"
Wide Plank	46"	10"

## SRS-72MODEL 6' Steel Rolling Scaffold

**1000lbs.** LOAD CAPACITY\*



Deck pins secure plywood to scaffold frame

Sections stack easily when casters are removed (2 high maximum)

Platform height adjustable in 2" increments for unique working heights and uneven surfaces

Protected locking pins prevent accidental release

Locking casters swivel for convenient 360° mobility

- Easy one-person assembly- No tools required for quick setup and tear down.
- \*1000 lbs. load capacity distributed evenly

### DIMENSIONS

Model No.	Approx. Width	Approx. Length	Approx. Height	Approx. Shipping Wt. Lbs.
SRS-72	29-1/2"	73-3/4"	74-7/8"	127
SRS-72T	29-1/2"	73-3/4"	74-7/8"	130

### COMPONENT DIMENSIONS

Component	Quantity Included	Approx. Width	Approx. Length	Approx. Height
Frames	2	29"	68-3/4"	1-1/2"
Arm Braces	2	1-1/2"	73-7/8"	17-7/8"
Plywood Deck	1	28-1/2"	66-3/4"	1-1/2"
Locking Casters	4	5-1/8"	9-7/8"	—

### ACCESSORIES (AVAILABLE SEPARATELY)


Model No.	Description	Approx. Width	Approx. Length	Approx. Height	Approx. Shipping Wt. Lbs.
SRO-72-4	Outriggers (4-pc master carton)	18"	20-3/4"	—	37.5
SRQ24-72-4	Outriggers (4-pc master carton)	18"	24"	—	38
SRG-72	Guard Rail and Toeboard Kit	28-7/8"	69-5/8"	42"	70.5
SRC-72-4	Casters (4-pc master carton)	5-1/8"	1-1/8"	9-7/8"	20.0
SRD-72	Plywood Deck	28-1/2"	66-3/4"	2"	32.5
SRD-72T	Plywood Deck with Trap Door	28-1/2"	66-3/4"	2"	35.5

Note: Outriggers and Guard Rails are required when working height reaches 10'



## PA200SERIES Aluminum Extension Plank

- 1 person, 250 lb. Load Capacity.
- For use on stepladders, telescoping multiladders, extension trestle ladders and extension and single ladders equipped with ladder jacks.

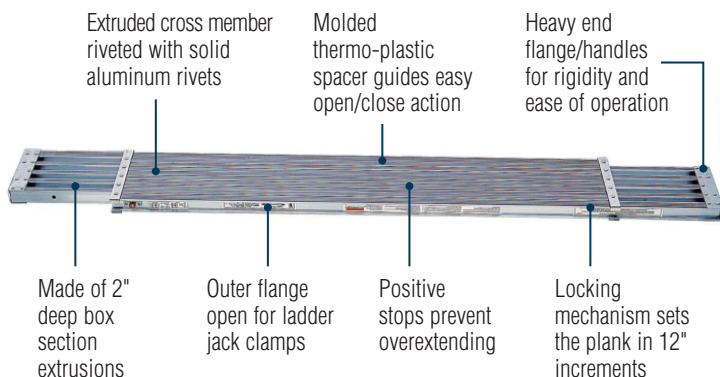

### SPECIFICATIONS

Model No.	Closed Position	Open Position	Approx. Width	Inner Rails	Outer Flanged Rails	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
PA206	6'	9'	14"	1-1/8" x 2"	1-7/8" x 2"	1.5	31.0
PA208	8'	13'	14"	1-1/8" x 2"	1-7/8" x 2"	2.0	40.5
PA210	10'	17'	14"	1-1/8" x 2"	1-7/8" x 2"	2.5	56.5

Note: When assembled as scaffold or staging, these planks must be used in conjunction with suitable guard rail protection in compliance with applicable governmental codes, ordinances, regulations and safe practice.

## 5600SERIES 2-Piece Extruded Aluma-Board™



Model 5607-19

### SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5607-19	75 lbs.	19-1/16"	7'	2"	30.0

### FOR USE WITH STEEL SCAFFOLDS

## 5500SERIES Aluminum Decked Aluma-Plank®



Model 5507-19

### SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5507-19	75 lbs.	19-1/16"	7'	3"	25.0
5508-19	75 lbs.	19-1/16"	8'	4"	34.0
5510-19	75 lbs.	19-1/16"	10'	4"	43.0

### FOR USE WITH STEEL SCAFFOLDS

## 5300SERIES Plywood Decked Aluma-Plank®



Model 5310-19

### SPECIFICATIONS

Model No.	Duty Rating/Sq. Ft.	Width	Side Rail Length	Side Rail Depth	Approx. Shipping Wt. Lbs.
5307-19	75 lbs.	19-1/16"	7'	3-1/2"	27.0
5308-19	75 lbs.	19-1/16"	8'	4-1/2"	38.0
5310-19	75 lbs.	19-1/16"	10'	4-1/2"	47.0

### FOR USE WITH STEEL SCAFFOLDS

# ALUMINUMPUMP JACK SYSTEM

- Versatile, dependable and easy to operate
- Field replaceable components
- Compatible and interchangeable with the leading competitor




Note: When working 10 ft. and above, OSHA requires fall protection. Refer to product labels.

- |                                             |                                       |                                |                                |                                |                                            |                                        |
|---------------------------------------------|---------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------------------|----------------------------------------|
| <b>1</b> Foldable Support<br>Brace (PJ-SBF) | <b>2</b> Nestable Stage<br>(WNS 2512) | <b>3</b> Safety Net<br>(PJ-SN) | <b>4</b> Work Bench<br>(PJ-WB) | <b>5</b> Pump Jack<br>(PJ-100) | <b>6</b> End Rail Kit<br>(narrow) (PJ-ERN) | <b>7</b> 24' Aluminum Pole<br>(PJ-24P) |
|---------------------------------------------|---------------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------------------|----------------------------------------|
- 
- |                                                                                                                           |                                                                                                                |                                                                                     |                                                                                     |                                                                                      |                                                                                                                                      |                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>(Rigid Support<br>Brace available) | <br>(other sizes available) |  |  |  | <br>PJ-ERW<br>kit for<br>wide span<br>available | <br>Also available:<br>6' (PJ-6P)<br>12' (PJ-12P)<br>18' (PJ-18P) |
|---------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|

- Pump Jack
- Work Bench
- Poles and Brace
- End Rail Kits
- Safety Net



## Nestable Stages

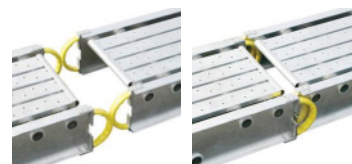

- Continuous work platform reduces trip hazard
- 2 Person – 500 lbs. Rated

### PUMP JACK COMPONENTS


Model No.	Description	Approx. Shipping Wt. Lbs.
PJ-100	Pump jack	30.0
PJ-PF-4	Pole foot	3.0
PJ-6P	6' aluminum pole	14.0
PJ-12P	12' aluminum pole	28.0
PJ-18P	18' aluminum pole	42.0
PJ-24P	24' aluminum pole	56.0
PJ-PC	Pole connector	12.0
PJ-SBF	Foldable support brace	9.0
PJ-SBR	Rigid support brace	14.0
PJ-WB	Work bench	15.0
PJ-ERN	End rail kit (narrow)	15.0
PJ-ERW	End rail kit (wide)	17.0
PJ-SN	Safety net	14.0

### NESTABLE STAGES

Model No.	Nestable Stage Description	Approx. Shipping Wt. Lbs.
WNS-2412	14" x 12'	46.0
WNS-2416	14" x 16'	63.0
WNS-2420	14" x 20'	86.0
WNS-2424	14" x 24'	115.0
WNS-2512	20" x 12'	54.0
WNS-2516	20" x 16'	75.0
WNS-2520	20" x 20'	103.0
WNS-2524	20" x 24'	122.0
WNS-2612	24" x 12'	62.0
WNS-2616	24" x 16'	81.0
WNS-2620	24" x 20'	116.0
WNS-2624	24" x 24'	139.0

2-person - 500 lbs. rated


# STEELPUMP JACK SYSTEM

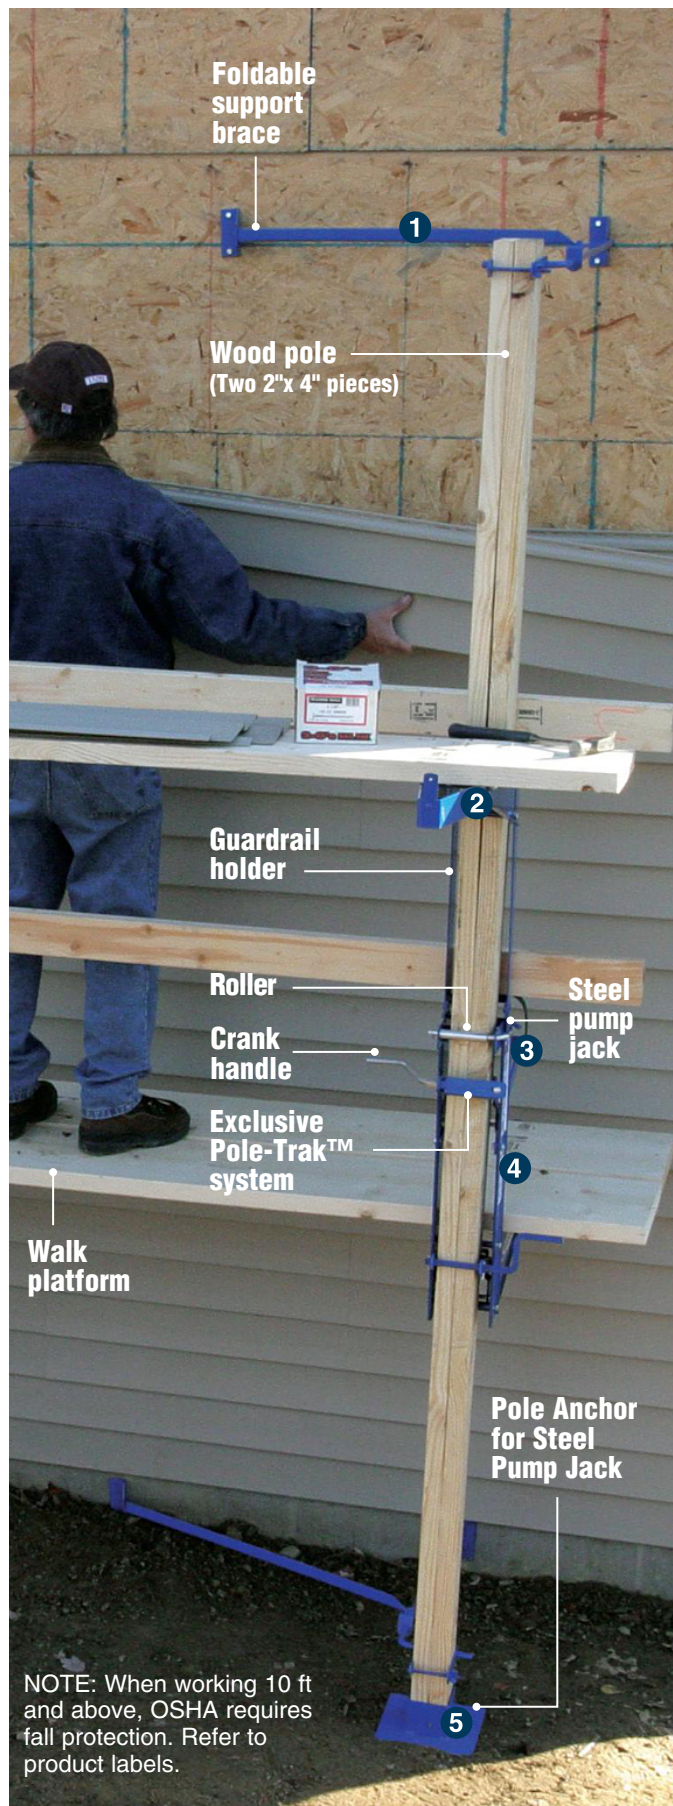

NOTE: When working 10 ft and above, OSHA requires fall protection. Refer to product labels.

- Exclusive Pole-Trak™ system with rugged hand crank and safety brake
- Slip-resistant foot lever with oversized boot strap
- Accommodates up to a 24" wide plank
- Economical and easy to operate
- Meets ANSI and OSHA standards

- **Pump Jack**
- **Work Bench with Guard Rail Holder**
- **Pole Anchor**
- **Foldable Brace**

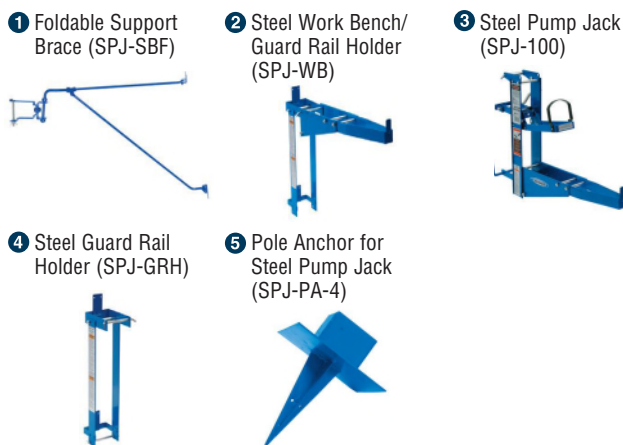


## COMPONENTS SHOWN

Description	Model Number	Product Weight (lbs)
<b>1</b> Foldable Support Brace	SPJ-SBF	7.0
<b>2</b> Steel Work Bench/ Guard Rail Holder	SPJ-WB	11.0
<b>3</b> Steel Pump Jack	SPJ-100	23.0
<b>4</b> Steel Guard Rail Holder	SPJ-GRH	5.5
<b>5</b> Pole Anchor for Steel Pump Jack (Shipped in 4-packs)	SPJ-PA-4	5.5 (4-pk weight: 23.0)

# ALUMINUM TASK MASTER® STAGES

- **Twist-Proof® Stage Design**
- **Ideal for ladder jack applications, swing stages or catwalks**

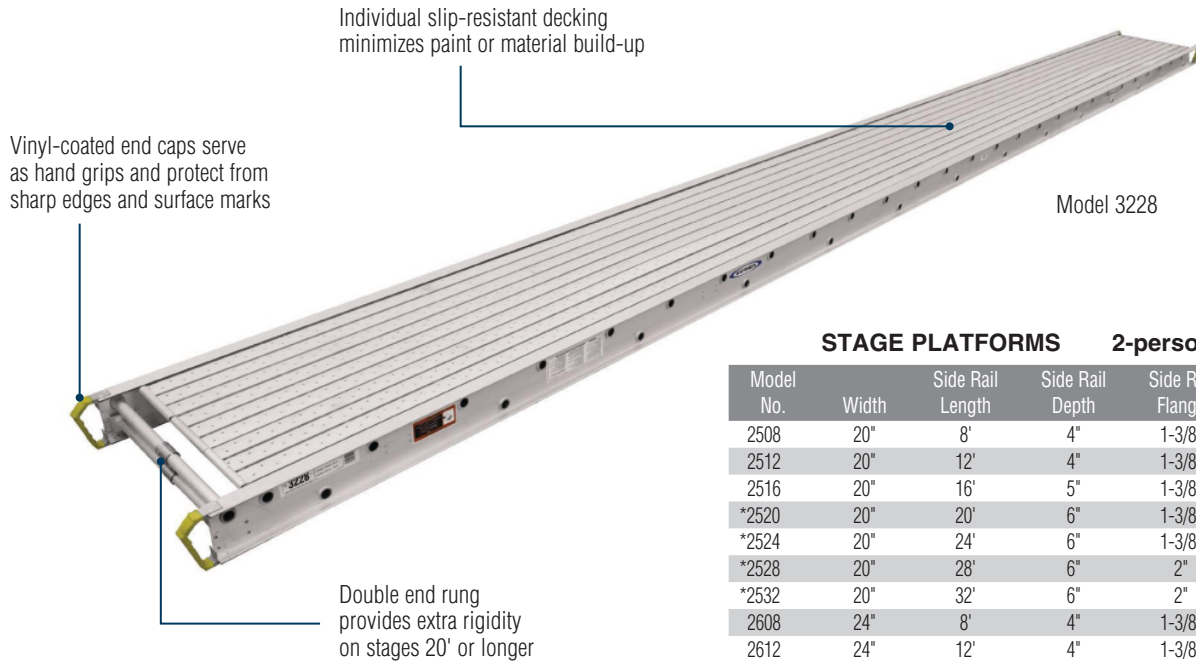

Model 3228

### STAGE PLATFORMS 2-person - 500 lbs. rated

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2508	20"	8'	4"	1-3/8"	33.0
2512	20"	12'	4"	1-3/8"	48.0
2516	20"	16'	5"	1-3/8"	70.0
*2520	20"	20'	6"	1-3/8"	102.0
*2524	20"	24'	6"	1-3/8"	121.0
*2528	20"	28'	6"	2"	157.0
*2532	20"	32'	6"	2"	179.0
2608	24"	8'	4"	1-3/8"	38.0
2612	24"	12'	4"	1-3/8"	56.0
2616	24"	16'	5"	1-3/8"	81.0
*2620	24"	20'	6"	1-3/8"	115.0
*2624	24"	24'	6"	1-3/8"	138.0
*2628	24"	28'	6"	2"	168.0
*2632	24"	32'	6"	2"	191.0
2708	28"	8'	4"	1-3/8"	41.0
2712	28"	12'	4"	1-3/8"	60.0
2716	28"	16'	5"	1-3/8"	87.0
*2720	28"	20'	6"	1-3/8"	124.0
*2724	28"	24'	6"	1-3/8"	147.0
*2728	28"	28'	6"	2"	187.0
*2732	28"	32'	6"	2"	213.0

### 3-person - 750 lbs. rated

3112	24"	12'	4"	2"	64.0
3116	24"	16'	5"	2"	92.0
*3120	24"	20'	5"	2"	115.0
*3124	24"	24'	6"	2"	145.0
*3128	24"	28'	6" Heavy Duty	2"	204.0
*3132	24"	32'	6" Heavy Duty	2"	236.0
*3136	24"	36'	6" Heavy Duty	2"	323.0
*3139	24"	39'	6" Heavy Duty	2"	365.0
3208	28"	8'	4"	2"	48.0
3212	28"	12'	4"	2"	71.0
3216	28"	16'	5"	2"	103.0
*3220	28"	20'	5"	2"	128.0
*3224	28"	24'	6"	2"	161.0
*3228	28"	28'	6" Heavy Duty	2"	220.0
*3232	28"	32'	6" Heavy Duty	2"	251.0
*3236†	28"	36'	6" Heavy Duty	2"	344.0
*3239†	28"	39'	6" Heavy Duty	2"	388.0

\*Includes set of double rungs at the end of stage. †Includes reinforcing channel


### DECORATOR PLANKS 1-person - 250 lbs. rated

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2008	12"	8'	4"	1-3/8"	25.0
2012	12"	12'	4"	1-3/8"	36.0
2016	12"	16'	4"	1-3/8"	48.0
2020	12"	20'	5"	1-3/8"	65.0
2024	12"	24'	5"	1-3/8"	78.0

### SCAFFOLD PLANKS 2-person - 500 lbs. rated

Model No.	Width	Side Rail Length	Side Rail Depth	Side Rail Flange	Approx. Shipping Wt. Lbs.
2316	12"	16'	4"	1-3/8"	48.0
2320	12"	20'	6"	1-3/8"	79.0
2324	12"	24'	6" Heavy Duty	1-3/8"	112.0
2328	12"	28'	6" Heavy Duty	1-3/8"	131.0
2330	12"	30'	6" Heavy Duty	1-3/8"	140.0
2332	12"	32'	6" Heavy Duty	1-3/8"	149.0
2408	14"	8'	4"	1-3/8"	27.0
2412	14"	12'	4"	1-3/8"	40.0
2416	14"	16'	5"	1-3/8"	58.0
2420	14"	20'	6"	1-3/8"	85.0
2424	14"	24'	6"	2"	109.0
2428	14"	28'	6"	2"	127.0
2432	14"	32'	6" Heavy Duty	2"	182.0

# GUARD RAIL SYSTEMS

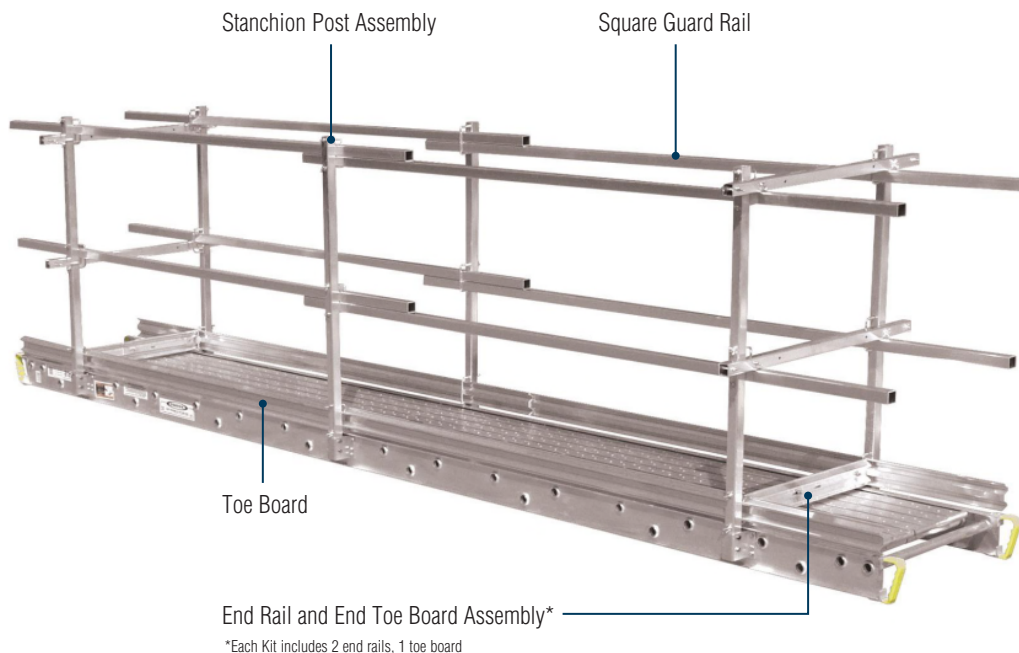

## SQUARE MODULAR GUARD RAIL SYSTEM

### System Sizing: How do I size a guard rail system?

The following steps show how to size a single-sided, three-sided, and four-sided guard rail system:

- Step 1: Determine the stage length and width.
- Step 2: Determine whether guardrail system is one-, two-, three-, or four -sided.
- Step 3: Read across the row to determine component requirements.
- Step 4: If ordering a three- or four-sided system, order two ERT-N for 12" and 14" wide stages, and two ERT-W for all stages 20" wide or greater.

*Note: If ordering a two sided system, double the single sided component requirement.*

Model No.	Description	Approx. Shipping Wt. Lbs.
ERT-N	End rail and end toe board assembly - narrow	4.5
ERT-W	End rail and end toe board assembly - wide	7.0
SSP-47	Stanchion post assembly	5.0
SGR-09	1-1/2" square guard rail cut length - 108"	6.0
SGR-13	1-1/2" square guard rail cut length - 156"	8.5
STB-09	3-1/2" toe board cut length - 108"	4.5
STB-13	3-1/2" toe board cut length - 156"	6.5

Stage Length	Single-sided					Three-sided					Four-sided						
	SSP-47	SGR-09	SGR-13	STB-09	STB-13	SSP-47	SGR-09	SGR-13	STB-09	STB-13	ERT-N/ ERT-W*	SSP-47	SGR-09	SGR-13	STB-09	STB-13	ERT-N/ ERT-W*
8'	2	2	0	1	0	4	2	0	1	0	2	4	4	0	2	0	2
12'	3	0	2	0	1	5	0	2	0	1	2	6	0	4	0	2	2
16'	3	4	0	2	0	5	4	0	2	0	2	6	8	0	4	0	2
20'	4	2	2	1	1	6	2	2	1	1	2	8	4	4	2	2	2
24'	5	4	2	2	1	7	4	2	2	1	2	10	8	4	4	2	2
28'	6	2	4	1	2	8	2	4	1	2	2	12	4	8	2	4	2
32'	6	2	4	1	2	8	2	4	1	2	2	12	4	8	2	4	2
36'	6	10	0	5	0	8	10	0	5	0	2	12	20	0	10	0	2
39'	7	4	4	2	2	9	4	4	2	2	2	14	8	8	4	4	2

\*ERT-N is for 12" and 14" wide stages; ERT-W is for 20" wide and greater stages

# ALUMINUM SCAFFOLDING

Werner aluminum scaffolding is best suited for construction and building maintenance applications, especially in high-traffic areas where mobility and appearance are important.

**CONSTRUCTION:**

- Drywall
- Insulation
- Drop ceilings
- Ductwork

**BUILDING MAINTENANCE:**

- Window and façade cleaning
- Changing light bulbs
- Painting
- Wallpapering

## Aluminum scaffolding has benefits that steel scaffolding does not.

- More corrosion resistant
- Convenient - 30-50% lighter
- Easier and quicker to install
- Better on-site appearance

## Werner offers scaffolding as towers, sections and individual components.

- Towers and sections for the one-time purchaser with limited scaffold knowledge
- Components for the regular purchaser with extensive knowledge on configuring a scaffold tower

## Scaffolding can be used on inclines and stairs.

- For use on an incline, a scaffold tower must be secured to prevent movement.
- Scaffolding can be used on a stairway provided the horizontal braces from one end frame to the other are at the same level and adequate braces are used.

# ALUMINUM SCAFFOLD TOWERS

- Easy and convenient to order
- Takes the guesswork out of what is required to meet Code
- Ideal for schools, hospitals and building maintenance

Includes guard rails, toeboards and planks with access door that allows end users to climb from inside. 23' towers include additional fixed board (no access door). Outriggers included on all models except 4201-12, 4202-12 and 4203-12. These models meet the ANSI code as noted on Page 50 - "Notice".

## Narrow Span Towers

Platform Length	Total Width (W)	Total Length (L)
6'	9' 6"	9' 6"
8'	9' 6"	11' 6"
10'	9' 6"	13' 6"



### 12' Platform Height

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4101-12	6'	29"	12'	15' 5"	359.0
4102-12	8'	29"	12'	15' 5"	389.0
4103-12	10'	29"	12'	15' 5"	410.5



### 18' Platform Height

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4101-18	6'	29"	17' 6"	20' 11"	405.0
4102-18	8'	29"	17' 6"	20' 11"	439.0
4103-18	10'	29"	17' 6"	20' 11"	462.5



### 23' Platform Height

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4101-23	6'	29"	23'	26' 4"	451.0
4102-23	8'	29"	23'	26' 4"	489.0
4103-23	10'	29"	23'	26' 4"	514.5

Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck & scaffold.


## Wide Span Towers



### 12' Platform Height\*

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4201-12	6'	4-1/2'	12'	15' 5"	299.5
4202-12	8'	4-1/2'	12'	15' 5"	338.0
4203-12	10'	4-1/2'	12'	15' 5"	366.0


\*Outriggers not included with 12' high platform wide span towers (Per ANSI code, does not require outriggers).

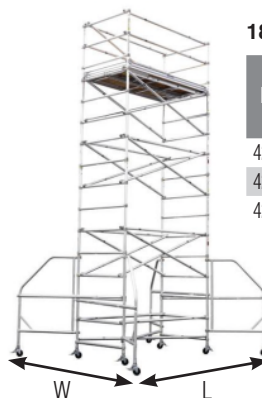

### 18' Platform Height

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4201-18	6'	4-1/2'	17' 6"	20' 11"	561.5
4202-18	8'	4-1/2'	17' 6"	20' 11"	610.0
4203-18	10'	4-1/2'	17' 6"	20' 11"	643.0

Platform Length	Total Width (W)	Total Length (L)
6'	10' 10"	10' 10"
8'	10' 10"	12' 10"
10'	10' 10"	14' 7"

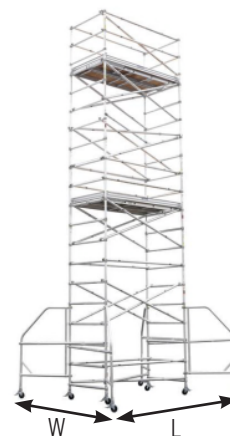

### 23' Platform Height

Model No.	Platform Length	Platform Width	Platform Height	Total Tower Height	Approx. Shipping Wt. Lbs.
4201-23	6'	4-1/2'	23'	26' 4"	695.0
4202-23	8'	4-1/2'	23'	26' 4"	778.0
4203-23	10'	4-1/2'	23'	26' 4"	862.0

Platform Length	Total Width (W)	Total Length (L)
6'	10' 10"	10' 10"
8'	10' 10"	12' 10"
10'	10' 10"	14' 7"


Load Capacity: 25 lbs. per sq. ft. or 500 lbs. per deck and 1,000 lbs. maximum per scaffold.

# SCAFFOLD SECTIONS

- Easy and convenient to order
- Enables user to easily add to an existing scaffold tower
- Ideal for painting and remodeling contractors

## NARROW SPAN SCAFFOLD SECTIONS

Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck and scaffold

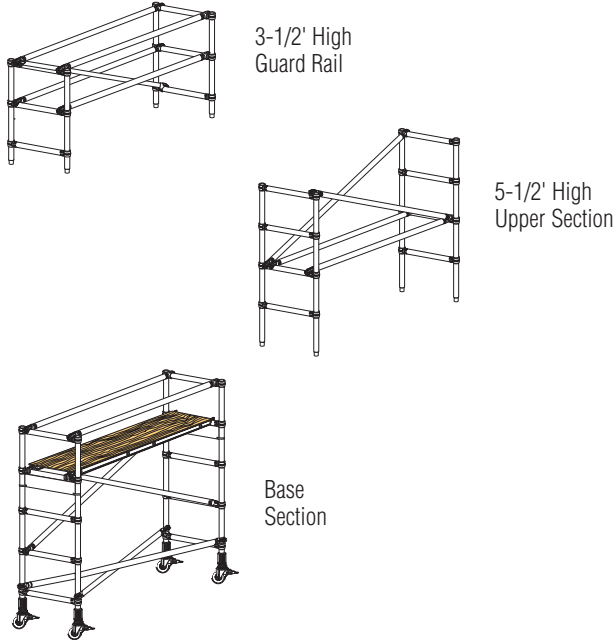

## WIDE SPAN SCAFFOLD SECTIONS

Load Capacity: 25 lbs. per sq. ft. or 500 lbs. maximum per deck and 1000 lbs. maximum per scaffold



Model No.	Width	Length	Approx. Shipping Wt. Lbs.
<b>6' 6" to 7' 6" High Adjustable Base Sections</b>			
4101	29"	6'	121.0
4102	29"	8'	133.0
4103	29"	10'	145.0
<b>6-3/4' High Upper Sections</b>			
4127	29"	6'	60.0
4128	29"	8'	65.0
4129	29"	10'	68.0
<b>5-1/2' High Upper Sections</b>			
4104	29"	6'	53.0
4105	29"	8'	58.0
4106	29"	10'	62.0
<b>4' High Upper Sections</b>			
4107	29"	6'	47.0
4108	29"	8'	51.0
4109	29"	10'	55.0
<b>3-1/2' High Guard Rails</b>			
4110	29"	6'	44.0
4111	29"	8'	48.0
4112	29"	10'	52.0

Model No.	Width	Length	Approx. Shipping Wt. Lbs.
<b>6' 6" to 7' 6" High Base Sections</b>			
4201	4-1/2'	6'	167.0
4202	4-1/2'	8'	188.0
4203	4-1/2'	10'	208.0
<b>5-1/2' High Upper Sections</b>			
4204	4-1/2'	6'	71.0
4205	4-1/2'	8'	76.0
4206	4-1/2'	10'	81.0
<b>4' High Upper Sections</b>			
4207	4-1/2'	6'	62.0
4208	4-1/2'	8'	68.0
4209	4-1/2'	10'	73.0
<b>3-1/2' High Guard Rails</b>			
4210	4-1/2'	6'	55.0
4211	4-1/2'	8'	60.0
4212	4-1/2'	10'	65.0



## SCAFFOLD COMPONENTS

- Provides most flexibility during installation
- Enables end user to easily convert to different length or height scaffold towers
- All components available separately
- Ideal for rental yards and theatrical and entertainment applications.

## FRAMES

Model No.	Description	Approx. Shipping Wt. Lbs.
<b>For Narrow Span, 29" Wide</b>		
FNB-80	Base end frame	35.0
FNU-81	6-3/4' H upper end frame	19.0
FNU-65	5-1/2' H upper end frame	15.0
FNU-49	4' H upper end frame	12.0
FNG-42	Guard rail end frame	11.5
<b>For Wide Span, 4-1/2' Wide</b>		
FWB-80	Base end frame	39.5
FWU-81	6-3/4' H wide span upper end frame	22.0
FWU-65	5-1/2' H upper end frame	19.0
FWU-49	4' H upper end frame	14.5
FWG-42	Guard rail end frame	14.5


## SCAFFOLD BOARDS

Model No.	Description	Approx. Shipping Wt. Lbs.
P22W-6	6' scaffold board	28.5
P22W-8	8' scaffold board	36.0
P22W-10	10' scaffold board	42.5
PD22W-6	22" wood deck with access door - 6' board	33.0
PD22W-8	22" wood deck with access door - 8' board	41.0
PD22W-10	22" wood deck with access door - 10' board	49.0


## BRACES

Model No.	Description	Approx. Shipping Wt. Lbs.
BD-6	6' diagonal brace	4.0
BD-8	8' diagonal brace	5.0
BD-10	10' diagonal brace	5.5
BH-6	6' horizontal brace	4.0
BH-8	8' horizontal brace	5.0
BH-10	10' horizontal brace	5.5
BN-6	6' narrow span horizontal-diagonal brace	4.0
BN-8	8' narrow span horizontal-diagonal brace	5.0
BN-10	10' narrow span horizontal-diagonal brace	6.0
BW-6	6' wide span horizontal-diagonal brace	5.0
BW-8	8' wide span horizontal-diagonal brace	5.5
BW-10	10' wide span horizontal-diagonal brace	6.0

## ACCESSORY KITS



**Kit No. 41-1  
ONE SWIVEL  
BASE  
PLATE**



**Kit No. 43-1  
GUARD RAIL HOLDER**


**A Werner Exclusive**

Includes four steel guard rail holders. With a set of guard rail holders, you can easily turn a horizontal brace into a guard rail.

**NOTE:** Guard Rail Holder fits Intermediate Scaffold Section Models: 4104-4109, 4127-4129, 4204-4209. They are not designed for Werner Co. Guard Rail Upper Section Models: 4110, 4111, 4112, 4210, 4211, 4212.

Kit No.	Description	Approx. Shipping Wt. Lbs.
41-1	One swivel base plate for stairway and span type scaffolds	8.0
43-1	Guard Rail Holder fits intermediate scaffold section models: 4104-4109, 4127-4129, 4204-4209.	1.2

## OUTRIGGERS for Wide and Narrow Span Scaffolds

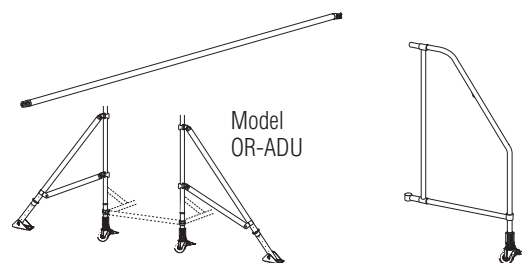


**Note:** Braces and Frames are ordered separately

Model No.	Description	Approx. Shipping Wt. Lbs.
BOR-N	Narrow span outrigger brace	4.0
BOR-W	Wide span outrigger brace	5.0
FRO	Rolling outrigger frame (with every frame, a brace is needed)	18.0
<b>Knee-Type Outriggers</b>		
OR-ADU	Adjustable 1' to 5' 6" wide for narrow or wide span scaffolds	11.0

## TOE BOARD SYSTEMS

OSHA requires toe boards on scaffolds over 10' high

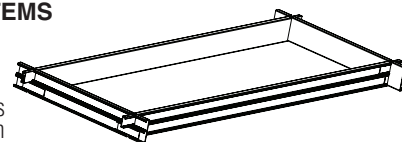

Model No.	Size	Approx. Shipping Wt. Lbs.
<b>Aluminum Toe Board Assemblies for 4100 Series</b>		
TN4A-6U	4" x 6'	18.0
TN4A-8U	4" x 8'	21.0
TN4A-10U	4" x 10'	25.0
<b>Aluminum Toe Board Assemblies for 4200 Series</b>		
TW4A-6U	4" x 6'	21.0
TW4A-8U	4" x 8'	25.0
TW4A-10U	4" x 10'	28.0

**NOTICE – ALL SCAFFOLDS:** Maximum scaffold platform height is equal to 4x the smaller base section dimension of the scaffold or installed outrigger in most states except California which requires 3x. Check state and local codes.

Scaffold Towers		Narrow Span (29" wide) Towers									Wide Span (4-1/2" wide) Towers									
Platform Length		6' Long			8' Long			10' Long			6' Long			8' Long			10' Long			
Component Model No.	Description	4101-12	4101-18	4101-23	4102-12	4102-18	4102-23	4103-12	4103-18	4103-23	4201-12	4201-18	4201-23	4202-12	4202-18	4202-23	4203-12	4203-18	4203-23	
<b>FNB-80</b>	Adjustable Base Section	2	2	2	2	2	2	2	2	2										
<b>FNU-65</b>	5-1/2' Upper Section	2	4	6	2	4	6	2	4	6										
<b>FNG-42</b>	Guard Rail	2	2	2	2	2	2	2	2	2										
<b>FWB-80</b>	Adjustable Base Section										2	2	2	2	2	2	2	2	2	2
<b>FWU-65</b>	5-1/2' Upper Section										2	4	6	2	4	6	2	4	6	
<b>FWG-42</b>	Guard Rail										2	2	2	2	2	2	2	2	2	2
<b>PD22W-6, -8, -10*</b>	Access Door Plank	1	1	2	1	1	2	1	1	2	1	1	2	1	1	2	1	1	2	
<b>P22W-6, -8, -10*</b>	Wood Deck										1	1	2	1	1	2	1	1	2	
<b>BH-6, -8, -10*</b>	Horizontal Brace	8	10	12	8	10	12	8	10	12	8	10	12	8	10	12	8	10	12	
<b>BD-6, -8, -10*</b>	Diagonal Brace	5	7	9	5	7	9	5	7	9	9	13	17	9	13	17	9	13	17	
<b>BN-6, -8, -10*</b>	Horizontal-Diagonal	2	2	4	2	2	4	2	2	4										
<b>BW-6, -8, -10*</b>	Horizontal-Diagonal										2	2	4	2	2	4	2	2	4	
<b>FRO</b>	Outrigger	4	4	4	4	4	4	4	4	4		4	4		4	4			4	4
<b>BOR-N, -W</b>	Outrigger Brace	4	4	4	4	4	4	4	4	4		4	4		4	4			4	4
<b>TN4A-6U, -8U, -10U</b>	Toe Board	1	1	2	1	1	2	1	1	2										
<b>TW4A-6U, -8U, -10U</b>	Toe Board										1	1	2	1	1	2	1	1	2	

\*-6, -8, -10 refers to platform length. Add suffix to model number for corresponding platform length.

Please follow these steps and refer to the chart below for purchasing a ladder accessory that is factory installed. Certain combinations of factory installed accessories to the same ladder are also available. Lead time for factory installed accessories may vary depending on availability. If you have a question or need assistance, please call customer service at 1-888-523-3371.

Step 1: Locate the ladder's model number and add an X on to the end of the model number.

Step 2: Use the chart provided and find the accessory you want attached. Add the 4 digit designator to the end of the ladder model number after the X.

Example: Ladder Model Number: D6220-2  
 Add the X to signify factory installation: D6220-2X  
 Accessory to install: APK80  
 Locate accessory on chart and find that "0004" designates this accessory being added.

**MODEL TO ORDER: D6220-2X0004**

Attached Accessories	Description	4-Digit Designator
A6I	Combination Spur-Hoop Shoe	0038
A7I	Padded Fixed V-Rung	0005
A72	Adjustable Pole Strap	0008
A74	Cable Hooks	0003
A78	Fly Section Shoe	0058
A8I	Adjustable Pole Lashes	0089
A83	Rubber Padded Shoe	0049
A86	Spur Shoe	0007
A92	Cable Hook and V-Rung Assembly	0002
APK70	LevelLok <sup>®</sup> Ladder Leveler with 2 base units	0086
APK80	Level-Master Automatic Ladder Levelers	0004


See price list for added cost.

Werner's illustrations are representative and may not include all styles.

All accessories, attachments, and replacement parts are designed and tested for Werner Co. products only.



PaintCup & PaintCupLiner




JobBucket



UtilityBucket



JobCaddy



UtilityHook



ToolLasso®

# CUSTOMIZE YOUR LADDER TOP



## AC27-P

### Paint Cup



Model No.	Fits on
AC27-P	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000, AC24

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
9-1/8" x 13-3/4" x 10-7/8"	4.0

*Shipping quantity (6) units per carton*

- Great for trim painting and cut-in applications
- Built-in magnet to secure a paint brush
- Holds 1 quart of paint
- Can be used with disposable Paint Cup Liner AC27-L

## AC27-L

### Paint Cup Liner



Model No.	Fits on
AC27-L	AC27-P

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
5-1/8" x 13-3/8" x 10"	2.2

*Shipping quantity (10) units per carton (40) liners per carton*

- Disposable liner makes clean up easy
- Each AC-27L unit includes 4 liners

## AC50-JB-3

### Job Bucket



Model No.	Fits on
AC50-JB-3	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
15-1/4" x 11-7/8" x 16-1/4"	6.6

*Shipping quantity (3) units per carton*

- Increase ladder storage and maximize your work space
- Integrated tape measure and screwdriver holders
- Top grooves hold round pipes in place
- 600 cubic inches of storage, 25 lbs. load capacity

## AC52-UB

### Utility Bucket



Model No.	Fits on
AC52-UB	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
13-1/2" x 10-3/4" x 10-3/4"	4.5

*Shipping quantity (3) units per carton*

- Expand your work surface
- Integrated Lock-In Socket for adding Paint Cup, ToolLasso® or Utility Hook
- Ideal for wet or dry applications
- Holds up to one gallon of liquid, 25 lbs. capacity

## AC54-JC

### Job Caddy



Model No.	Fits on
AC54-JC	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
15-1/2" x 8-3/8" x 10-3/8"	6.7

*Shipping quantity (3) units per carton*

- Holds large or odd shaped items like fluorescent bulbs or ceiling fan blades
- 4 storage compartments keep small parts separated
- Screwdriver, pliers, putty knife & towel holders
- End hook built in for increased convenience

## AC58-TL

### Tool Lasso®



Model No.	Fits on
AC58-TL	OBEL00, OBPT00, OBCN00, 6200, 6100, 6000, AC24, PS-48

Approx. Shipping Dimensions	Approx. Shipping Wt. Lbs.
10-7/8" x 12-1/4" x 9-3/4"	4.0

*Shipping quantity (12) units per carton*

- Secures tools from falling
- Wraps around the grip of power tools, hand tools and caulk guns
- Locks into HolsterTop® to keep tools safe and ready to use
- Compatible with the ToolLasso® belt clip
- AC58-TL includes 1 belt clip and 2 ToolLassos

**AC11**

**Stepladder Hanger**



Kit No.	Fits on	Approx. Shipping Weight
AC11		1.8 lbs. each

Hanger can be mounted on a wall to hold stepladders. Industrial strength coated steel wire construction.

**User Installed Only**

*Shipping quantity (6) units per carton*

**PK76**

**Universal Auto-Closing Pail Shelf**



Kit No.	Fits on	Approx. Shipping Wt.
PK76-3	Fiberglass Stepladders & Aluminum 400 Series Stepladders	2.5 lbs.

Spill-Proof®, rugged construction, easy to keep clean, automatically closes with stepladder, built-in rag rack. Pail shelf comes with mounting hardware and instructions.

**User Installed Only**

*Shipping quantity (4) units per carton*

**76**

**Molded Plastic Pail Shelf**



Kit No.	Fits on Fiberglass Series	Approx. Ship. Wt.
76-2	6000 6200	2.5 lbs.

Spill-Proof®, rugged construction, easy to keep clean, automatically closes with stepladder. Pail shelf comes with mounting hardware and instructions.

**User Installed Only**

*Shipping quantity (2) units per carton*

**40**

**Casters/Bracket Kits**



Kit No.	Fits on Series	Approx. Ship. Wt.
40-2HD	PT370, PT6000 PT7400 (MK 4 & up)	5.0 lbs.

Note: Fits only ladder originally equipped with casters.

Heavy duty aluminum bracket with 4" caster allows 360° mobility of ladder. Soft rubber wheels are easy on floors; designed to roll over door thresholds. Casters may be used on all 4 legs; order 2 kits for this purpose. Two (2) casters/brackets come with mounting hardware and instructions.

Order models below as a "-4C" for factory installation.

**User Installed Only**

**AC24**

**Multipurpose Project Tray**



Kit No.	Fits on	Approx. Shipping Wt.
AC24	MT Series M1 Series Type IA (300 lbs.) & Type IAA (375 lbs.) Stepladders	2.8 lbs.

Project Tray conveniently holds tools, paints and supplies. Made for Werner multiladders and stepladders. Attaches easily; works at multiple heights; includes ToolLasso®.


**User Installed Only**






# WALKTHRU™

EXTENSION LADDER SAFETY ACCESSORY

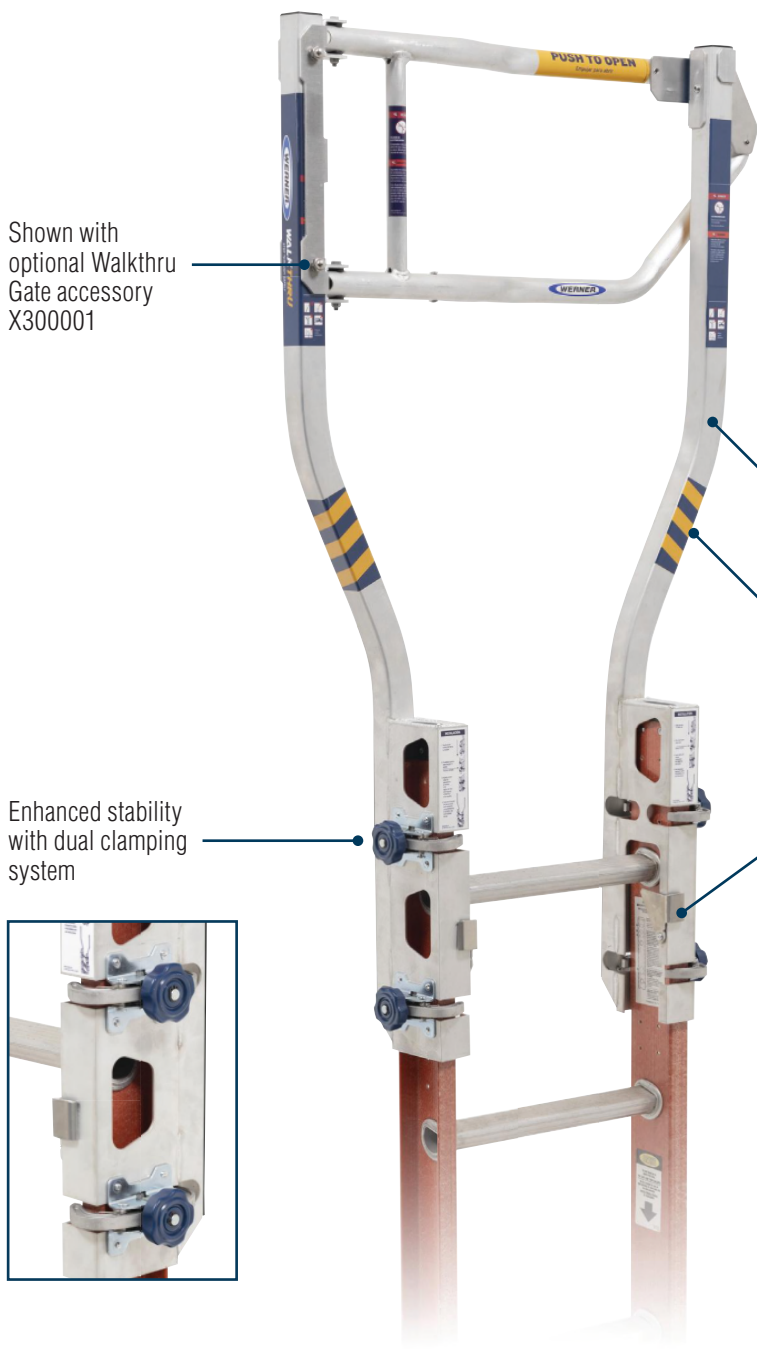

Shown with optional Walkthru Gate accessory X300001

Enhanced stability with dual clamping system

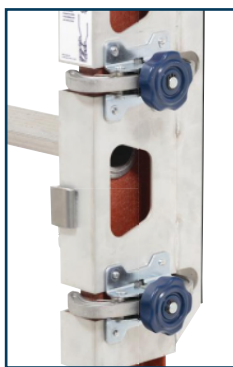

- Provides ergonomic transition area from ladder to roof, eliminating the need to step around the ladder
- Wide base provides additional contact area on the worksurface making a safer transition to and from the access point
- Spring closed gate accessory also available
- Easy to install and uninstall

Brace arms are designed for optimal descending and handles positioned for best ergonomics

Violator markings for visibility

Latch spring mechanism fits securely in place

LADDER*	DUTY RATING	
Type IAA	Special Duty	375 lbs
Type IA	Extra Heavy Duty	300 lbs
Type I	Heavy Duty	250 lbs
Type II	Standard	225 lbs

Meets Compliance Standards  
**OSHA** 1910 & 1926



MODEL #	ITEM NAME	SHIPPING HEIGHT	SHIPPING LENGTH	SHIPPING WIDTH	SHIPPING WEIGHT	PRODUCT WEIGHT
X300000	Extension Ladder WalkThru	7.1 in	51 in	9.75 in	11 lbs	10.5 lbs
X300001	Extension Ladder WalkThru Gate	3.75 in	30.7 in	14.17 in	4 lbs	4 lbs

\*Not compatible with 7800, 500-1,500-3,7100-1(manhole ladders only),9500-1,9500-2, D1300-2 & D1800-2EQ series ladders.

## LADDER JACKS

Recommended for use with 300 lbs. Type IA and 375 lbs. Type IAA extension ladders (OSHA and ANSI allow use with 250 lbs. Type I extension ladders also)

### User Installed Only



2-Rung Model AC10-14-02 Short Body  
Accepts Stages to 14" width



2-Rung Model AC10-20-02 Long Body  
Accepts Stages to 20" width




3-Rung Model AC10-20-03 Long Body  
Accepts Stages to 20" width

- Lightweight, sturdy, easy to use
- Designed for quick field adjustments
- Mounts on either side of extension ladder

Kit No.	Approx. Shipping Wt.
AC10-14-02	15.0 lbs.
AC10-20-02	18.0 lbs.
AC10-20-03	20.0 lbs.

Shipping quantity  
2 per unit;  
(1) unit per carton



**PLATFORM CLAMP SYSTEM**  
Clamp secures platform to ladder jacks and ties supporting ladders together to help secure entire ladder jack system

## AC18MT

### Platform



Kit No.	Fits on All	Approx. Shipping Wt.
AC18MT	MT Series	4.5 lbs.

Slip-resistant surface. Aluminum construction. Kicks out of way for easy climbing. 300 lbs. load capacity.

### User Installed Only

## AC19

### Extension Ladder Covers



Kit No.	Fits on	Approx. Shipping Wt.
AC19-2	ALL Single and Extension Fiberglass and Aluminum Ladders (except 500, D1300-2 Series, D500, D7136-2, D7140-2)	1.2 lbs. each

Helps prevent damage to support surfaces. Designed to 'snap' over extension ladder rail end caps. Resists paints, stains, thinners and solvents.

### User Installed Only

Shipping quantity 1 pair per unit;  
(6) units per carton

## AC22

### Paint Can/Bucket Hanger



Kit No.	Fits on	Approx. Ship. Wt.
AC22	ALL Extension Ladders	0.5 lbs. each

Holds one gallon can. Easy on and off. Right or left hand use. Plated steel.

### User Installed Only

Shipping quantity  
(6) units per carton

## ARBIO-10

### Adjustable Roof Bracket

Carton Dimensions	Approx. Shipping Wt.
4-5/8" x 19-1/2" x 14-1/4"	25.0 lbs.

### User Installed Only

Shipping quantity  
(10) units per carton

## FRB4510-10

### Fixed Roof Bracket

FRB4510-10



Carton Dimensions	Approx. Shipping Wt.
9-3/8" x 18-1/4" x 9-1/4"	22.0 lbs.

Accommodates a 12/12, 45-degree roof pitch

Shipping quantity  
(10) units per carton

## AC78

### Quickclick™ Stabilizer



Kit No.	For use on Singles and Extensions with	Approx. Ship Wt.
AC78	1-1/4" round rungs 1-1/2" flat rungs 1-3/4" flat rungs 1-5/8" flat rungs	6.4 lbs.

Span: 44", Standoff :10"  
Requires no tools. Spring-loaded locking latch makes it easier and quicker to install/remove than any other stabilizer on the market. Mar-resistant rubber end caps protect work surface. Stabilizer comes with instructions. Paint can hook included.

**User Installed Only**  
**Not for use on Werner MultiLadders, Type III Aluminum or Type II Fiberglass extension ladders**

Shipping quantity  
(1) unit per carton

## AC96

### Aluminum Stabilizer



Kit No.	Fits on	Ladder Size	Approx. Ship. Wt.
AC96	Aluminum Series Extension Ladders with rails up to 3" x 1-3/16"	ALL	4.5 lbs.
D716		16'	
D1100		ALL	
D1200		ALL	
D1300		ALL	
D1500		ALL	
D500		20' - 24'	
MT		ALL	
M1		ALL	

Span: 47", Standoff :10"  
 For use on aluminum ladders of all duty ratings. Attaches in minutes. Mar-resistant rubber caps protect work surface. Paint can hook included. Comes with mounting hardware and instructions.

#### User Installed Only

**Ideal for stabilizing M1 MultiLadder when in scaffold or stairway positions**

Shipping quantity  
 (6) units per carton

## PK70-1/APK70

### Leveler with Base Units



Kit No.	Fits on All	Approx. Shipping Wt.
PK70-1 and APK70	MT Series, D7100, D6200, 7100, D1300, 7800	8.5 lbs.

Levelok® Ladder Leveler with 2 base attachments. Base unit stays attached to the ladder while leveler can be easily removed when not in use. Swivel shoe with ice pick on both ends. Leveler can be used on either side of ladder. Provides 8-1/2" of travel.

Levelok® is a registered trademark of the Levelok Corporation.

#### User or Factory Installed

## PK70-2

### Leveler Base Units



Kit No.	Fits on All	Approx. Shipping Wt.
PK70-2	MT Series, D7100, D6200, 7100, D1300, 7800	3.2 lbs.

Levelok® Ladder Leveler 2 base attachments. Base units attach to the ladder to be used with Levelok® Leveler supplied with PK70-1.

Levelok® is a registered trademark of the Levelok Corporation.

#### User Installed Only

## PK70-3

### Leveler



Approximate Shipping Weight  
 6.2 lbs.

Levelok® Ladder Leveler attaches to the base units supplied with PK70-1 and PK70-2.

Levelok® is a registered trademark of the Levelok Corporation.

## PK80/APK80

### Level-Master® Automatic Ladder Levelers



Kit No.	Fits on Fiberglass Series	Ladder Size
PK80-2 & APK80	D5900, D6000, D6200, D6300, 7100, D7100	ALL ALL ALL ALL

Kit No.	Fits on Aluminum Series	Ladder Size
PK80-2 & APK80	D1100, D1200, D1300, D1500, D500	ALL ALL ALL

Note: The original shoes of a D1500 series ladder may replace the steel shoes on a model PK80-2.

Approx. Shipping Weight

9.5 lbs.

Approx. Added Weight to Ladder for Factory Install

6.5 lbs.

Shipping quantity  
 (1) unit per carton

Easily attaches to Werner fiberglass and aluminum extension ladders to level ladder on uneven surfaces.

Automatically adjusts up to 8-1/2". Easily levels and locks securely in place. The width of the ladder is increased by approximately 3-3/4". Note: The ladder's duty rating will remain the same after proper installation of leveler. Two (2) ladder levelers (one for each ladder rail) come with mounting hardware and instructions.

#### User or Factory Installed

## A61

### Combination Spur-Hoop Shoe



Factory Install No.	Fits on Fiberglass Series	Ladder Size
A61	D6200-2, 7100-2, D7100-2	16' - 32' ALL 16' - 32'

Approx. Added Weight to Ladder for Factory Install

3.0 lbs.

Combination aluminum rail shield bracket and spur-hoop shoe assembly.

#### Factory Installed Only

## A62

### Flange Guards



Factory Install No.	Fits on Fiberglass Series	Ladder Size
A62	7100-2, 7200-2, D7100-2, D7200-2, D8100-2	16' - 32' ALL 16' - 32' ALL ALL

Approx. Added Weight to Ladder for Factory Install

4.0 lbs.

Black plastic guards prevent damage to ladder rails.

#### Factory Installed Only



## 66-1/A66-1

### Reflective Tape



Kit No.	Fits on	Approx. Ship. Wt.
66-1	All Ladders	0.04 lbs.

Factory Install No.	Fits on	Ladder Size
A66-1	All Ladders	ALL

Highly reflective tape to add visibility to ladders. User-installed kit includes two 12" strips.

#### **User or Factory Installed**

## 71/A71

### Padded Fixed V-Rung



Kit No.	Fits on Fiberglass Series	Ladder Size
71-1	D6200-2	ALL
	7100-2	ALL
	D7100-2	16' - 32'
	7800	ALL

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A71	D6200-1	ALL
	D6200-2	ALL
	7100-1	Up to 16'
	7100-2	ALL
	D7100-2	16' - 32'
	7800	ALL

#### Approx. Shipping Weight

71-1: 1.5 lbs.  
71-4: 2.0 lbs.

#### Approx. Added Weight to Ladder for Factory Install

1.4 lbs.

Slip-resistant rubber grip attached to steel v-rung for wood, metal or concrete poles. Pre-pierced holes in fiberglass top rails are provided to accept this accessory. V-rung assembly comes with mounting hardware and instructions.

## 72/A72

### Adjustable Pole Strap



Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Ship. Wt.
72-2	D6200-2	ALL	1.3 lbs.
	7100-2	Up to 16'	
	D7100-2	16' - 32'	

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A72	D6200-2	ALL
	7100-1	Up to 16'
	7100-2	ALL
	D7100-2	16' - 32'

Adjustable strap design for all diameter poles. Slip-resistant rubber grip stitched to strap. Strap assembly comes with mounting hardware and instructions.

#### **User or Factory Installed**

## 74/A74

### Cable Hooks



Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Ship. Wt.
74-1	D6200-2	ALL	2.6 lbs.
	7100-1	Up to 16'	
	7100-2	ALL	
	D7100-2	16' - 32'	


Factory Install No.	Fits on Fiberglass Series	Ladder Size
A74	D7100-2	ALL

Easily folds within side rails for storage. Cable hooks can be mounted above or below top rung. Consult Werner if using in conjunction with other accessories. Cable hooks come with mounting hardware and instructions.

#### **User or Factory Installed**

## A78

### Fly Section Shoes w/ Quick Disconnect



Factory Install No.	Fits on Fiberglass Series	Ladder Size
A78	D6200-2	ALL
	7100-2	ALL
	D7100-2	16' - 32'

#### Approx. Added Weight to Ladder for Factory Install

1.5 lbs.

Combination aluminum rail shield bracket and hoop shoe with corrugated slip-resistant extruded rubber pad on fly section, allows use as a single or manhole ladder assembly.

#### **Factory Installed Only**

## 81/A81

### Adjustable Pole Lashes



Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
81-3	D7100-2	36' - 40'	1.5 lbs.

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A81	D6200-2	ALL
	7100-1	ALL
	7100-2	ALL
	D7100-2	ALL

For use with ladders having hoop style end caps only. Adjustable strap design for all diameter poles. Adjustable pole lash comes with mounting hardware and instructions.

**User or Factory Installed**

## A83

### Rubber Padded Shoe



Factory Install No.	Fits on Fiberglass Series	Ladder Size
A83	D6200-1	ALL
	D6200-2	16' - 32'
	7100-1	Up to 16'
	7100-2	ALL
	D7100-2	16' - 32'

Approx. Added Weight to Ladder for Factory Install  
2.2 lbs.

Aluminum protective rail shield and rubber padded foot. Comes with two (2) padded shoes.

**Factory Installed Only**

## A82

### Red Rungs



Factory Install No.	Fits on Fiberglass Series	Ladder Size
A82-1	D7100-2	16' - 32'
	D7200-2	16' - 32'
	D8100-2	ALL
A82-2	D7100-2	ALL
A82-3	D7100-2	36' - 40'

Set of 3 painted red rungs for fiberglass extension ladders. Available for rung-plate models only.

**Factory Installed Only**

## 92/A92

### Cable Hook and V-Rung Assembly



Kit No.	Fits on Fiberglass Series	Ladder Size
92-88	D6200-2	16' - 40'
	D8200-2EQ	20' - 28'
92-89	7100-2, D7100-2	16' - 32'
	D7100-2LV	20' - 32'

Factory Install No.	Fits on Fiberglass Series	Ladder Size
A92	D6200-2	ALL
	D6200-3	ALL
	7100-2	ALL
	7100-1	8' - 16'
	D8200-2EQ	ALL
	D7100-2	16' - 32'
	D7100-2LV	20' - 32'

Approx. Shipping Weight  
4.0 lbs.

Approx. Added Weight to Ladder for Factory Install  
3.0 lbs.

Functions as both cable hook and v-rung. For use in applications where the diameter of the pole at the point of support does not exceed 10". Steel v-rung has rubber pad for slip-resistant performance. One (1) cable hook and v-rung assembly, mounting hardware and instructions included.

**User or Factory Installed**

## 86/A89

### Spur Shoe



Factory Install No.	Fits on Fiberglass Series	Ladder Size
A86	D6200-1	ALL
	D6200-2	16' - 32'
	7100-1	Up to 16'
	7100-2	ALL
	D7100-2	16' - 32'

Approx. Shipping Weight  
2.5 lbs.


Approx. Added Weight to Ladder for Factory Install  
2.0 lbs.

Plated steel spur for use on penetrable surfaces. Two (2) spur shoe assemblies, mounting hardware and instructions included.

**User or Factory Installed**

## 91

### Adjustable Pole Lash Assembly w/ Angle Brackets



Kit No.	Fits on Fiberglass Series	Ladder Size	Approx. Shipping Wt.
91-2	D6200-2	ALL	2.0 lbs.
	7100-2	ALL	
	D7100-2	16' - 32'	

This assembly comes with brackets for independent use; wraps around pole. Strap design for all diameter poles. Adjustable pole lash assembly comes with two (2) angle brackets, mounting hardware and instructions.

**User Installed Only**

## 94

### Ladder-Cinch™



Kit No.	Fits All	Ladder Size	Approx. Shipping Wt.
94-2	Fiberglass Series	ALL	1.0 lbs.


Extension Ladders

Use as a quick tie down. Strap designed for all diameter poles. One (1) Ladder-Cinch™ assembly, storage bag and instructions.

**User Installed Only**

# 97P

Adjustable True Grip® Stabilizer & Surface Protectors



Kit No.	Fits on Aluminum Series	Ladder Size
97P	D716-2	16'
	D1100	ALL
	D1200	ALL
	D1300	ALL
	D1500	ALL
	D500-2	20' - 24'
	D1700-2EQ	ALL
	D1800-2EQ	ALL

Note: Not to be used on Multi-Ladders

Approx. Shipping Weight

9.5 lbs.

Span adjustment : 49", 57" or 65"  
 Stand-off distance: 12" or 29-1/2"  
 Rectangular stabilizer spans double windows. Quickly converts stand off distance for larger overhangs. Mounts quickly and easily. This comes with one (1) stabilizer, rubber pads, fleece bonnets, mounting hardware and instructions.

- Fits rail up to 3" x 1-3/16"

**User Installed Only**

# 36-82

Attic Ladder Assist Pole



Kit No.	Fits on	Approx. Shipping Wt.
36-82	ALL Attic Ladders	3.0 lbs. each

3' assist pole allow easy access and smooth opening of attic ladder door.

**User Installed Only**





U.S. HEADQUARTERS

Werner Co.

555 Pierce Rd., STE 300

Itasca, IL 60143

To contact us, please visit:

[WERNERCO.COM](http://WERNERCO.COM)