

FALL PROTECTION



SAFETY ABOVE ALL™





TABLE OF CONTENTS

WERNER FALL PROTECTION

TOTAL JOBSITE SOLUTIONS3

THE WERNER PRODUCT PROMISE 4-5

HARNESSES 6-21

 WERNER HARNESS BRANDS 6-7

 CHOOSING A HARNESS.....7-9

 PROFORM F3.....10-11

 BLUE ARMOR12-15

 LITEFIT 16-17

 BASEWEAR..... 18

 ARC FLASH AND HI-VIZ..... 19

 HARNESS ACCESSORIES20

 DROP SAFETY EQUIPMENT.....21

SELF RETRACTING LIFELINES 22-29

 WERNER SRL BRANDS22

 MAX PATROL..... 23-24

 BANTAM25-26

 BASELINE27

 AUTOCOIL 228-29

LANYARDS 30-35

 WERNER LANYARD BRANDS..... 30-31

 DECOIL32-33

 SOFT COIL.....34

 ARC FLASH34

 POSITIONING35

ANCHORS 36-40

 CONCRETE.....36-38

 STEEL/I-BEAM.....39-40

 ROOF AND TIE-OFF STRAP 41-42

LIFELINES 43-44

WERNER KITS 45-49

 URMARK KITS45

 COMPLIANCE KITS46

 TRIPOD SYSTEM.....47

 RESCUE LADDER SYSTEM49

 TRAUMA STRAPS49

WERNER SAFETY TRAINING50

 SAFETY KAGE51

SAFETY ABOVE ALL.™

Werner Fall Protection is a team of industry Pros dedicated to jobsite safety through superior products and training. It's in our DNA and who we are. Built from the ground up, Werner Fall Protection was born from a passion to keep contractors safe when they leave the ground. Our experience and training expertise come together to form industry leading product innovations. Depend on Werner and experience a higher standard.



Safety is in Our DNA.

- Safety is core to Werner culture and history.
- A legacy of leadership in safe access at height.
- 150 years of combined fall protection expertise.



Dedicated Partner for Life.

- Unmatched national training team.
- Customer focused throughout the lifecycle.
- Industry pros committed to a higher standard.




Innovation Comes Standard.

- In-house design, testing and manufacturing.
- Designed to perform when it matters most.
- Leaders in post-fall safety.




VISUAL INSPECTION AID

WERNER
WebAlert™
INSPECTABLE WEBBING



WERNER
WebAlert™
INSPECTABLE WEBBING



WebAlert inspectable polyester webbing makes inspection easier by making wear and damage visible and obvious

POST-FALL ADJUSTMENT

PATENTED
RELIEF CORD
POST-FALL ADJUSTMENT SYSTEM



PROFORM F3
FUNCTION FIT / PROFORM

PATENTED
RELIEF HANDLE
POST-FALL ADJUSTMENT SYSTEM



Blue Armor · **LITEFIT™**
INSPECTABLE HARNESS · SAFETY HARNESS

Achieve Chair In The Air™ position in seconds, relieving the pressure on femoral arteries



THE WERNER PRODUCT PROMISE

Must offer inspectability to indicate wear or damage prior to use

Must be adjustable to accommodate most body frames to ensure comfort and productivity with or without tools

INSPECTABILITY

ADJUSTABILITY



Must perform safely
in the event of a fall

PERFORMANCE



Must be able to be
manipulated in a post-fall
condition to eliminate pain,
pressure points and improve
ability to assist in a rescue

MANIPULATION





1

ANCHORAGE/ANCHORAGE CONNECTORS

Static/Fixed Anchor Points (Not Shown)

Horizontal Lifelines

Must support 5,000 lbs.

SELECT PRODUCT THAT MATCHES APPLICATION

2

CONNECTION DEVICE

Fall Arrest (fall potential up to 6 ft.)

SELF RETRACTING LIFELINES (6' - 60')

LANYARDS (SINGLE OR TWIN LEG)

ROPES/GRABS (MANUAL OR TRAILING)

Fall Restraint (no fall potential)

LANYARDS (SINGLE OR TWIN LEG)

ROPES/GRABS (MANUAL)

3

HARNESSES

Standard

Climbing

Positioning

Retrieval

Construction

HARNESSES BRANDS



PROFORM™ F3

FUNCTION | FIT | FREEDOM

Werner ProForm F3 harnesses are athletically styled and constructed with lightweight materials to deliver maximum comfort and unrelenting safety performance. In the event of a Fall, simply pull the patented Relief Cords to deploy the built-in seat and achieve the Chair In The Air™ position, reducing the potential hazards of suspension trauma. ProForm F3 delivers Function, Fit and Freedom through the relief cords, dual back pad system, WebAlert2 inspectable webbing, integrated SRL bumper, cam torso adjustment, and all aluminum hardware. 425 lb. Rated.



Blue Armor™

INSPECTABLE HARNESS

Werner Blue Armor harnesses are designed and manufactured for the most demanding applications and the most serious professional workers. In the event of a fall, simply pull the patented Relief Handles to achieve the Chair In The Air™ position, reducing the potential hazards of suspension trauma. They combine safety features, comfort and durability for the highest levels of application. Unique wear-indicating webbing and impact indicators allow for easy inspection, 5-point adjustability deliver optimal fit, and bright colors improve worker visibility. 425lb. rated.



LITEFIT™

SAFETY HARNESS

The Werner Litefit line provides the right harness, the right fit, and the right value. In the event of a fall, simply pull the patented Relief Handles to achieve the Chair In The Air™ position, reducing the potential hazards of suspension trauma. These harnesses offer full adjustability for fit, comfort, and convenience, lightweight and durable hardware, and bright colors for enhanced visibility. 425lb. rated.



BASEWEAR™

SAFETY HARNESS

The Werner BaseWear line provides compliant fall protection at an economical value. These harnesses promote all day wear with lightweight design and Universal sizing. 310lb. rated.

KNOW YOUR HARNESS

How to choose the correct harness for the job

WEBBING

The webbing is the skeleton of the harness and must have the strength and durability to satisfy fall protection needs in demanding job environments.



LANYARD KEEPERS

The lanyard keeper provides a safe place to park a lanyard not in use and also reduces the likelihood of tripping on or snagging the lanyard.



STRAP KEEPERS

When properly adjusted and fit to a user, a harness may have extra webbing strap hanging out of the various buckles. Simple strap keepers allow the user to organize and store this extra strap to improve comfort and prevent snagging.

ALTERNATE ATTACHMENT HARDWARE


Different harnesses have additional D-Rings for specific applications: near the hips, on the chest, or on the shoulders.



SUB-PELVIC STRAP


When properly positioned, the sub-pelvic straps help to distribute force and weight during and after a fall.






BACK/SHOULDER PAD WITH DORSAL BACK D-RING

Cushioning on the back and shoulders helps distribute pressure, improving users' comfort.



LABELS

Harness labels include important product information and provide a place to record inspection data. Labels must be protected from wear and damage; legibility is critical.



IMPACT INDICATORS

Any harness exposed to a fall should be removed from service. These indicators provide instant evidence whether or not a fall has occurred.

ADJUSTMENT LOCATIONS


For optimal comfort and performance in a fall event, a harness must be properly adjusted and fit on the user. All areas of the harness should be snug, but not overly tight. Most harnesses have adjustments for the torso/shoulder straps, chest straps, and leg straps.

LEG STRAPS


Leg straps fasteners come in different styles, including pass through buckles, tongue buckles, and quick connect buckles.



Pass through



Tongue Buckle



Quick Connect

HARNESSES STYLES



STANDARD

For fall arrest only, features only a dorsal D-Ring on the back



CLIMBING

For climbing applications and attachment to fixed ladder safety systems, these harnesses include a frontal attachment point



POSITIONING

These harnesses have D-Rings located at the hips for use with positioning lanyards to allow for hands-free working in vertical structure applications



RETRIEVAL


D-Rings on the shoulders are used for lifting or lowering a user, typically in confined space or rescue applications



CONSTRUCTION STYLE (positioning with belt)

Construction harnesses feature belts and additional attachment points for a variety of applications. The belt allows users to carry tools, and additional padding improves user comfort

HARNESSES SIZE CHART

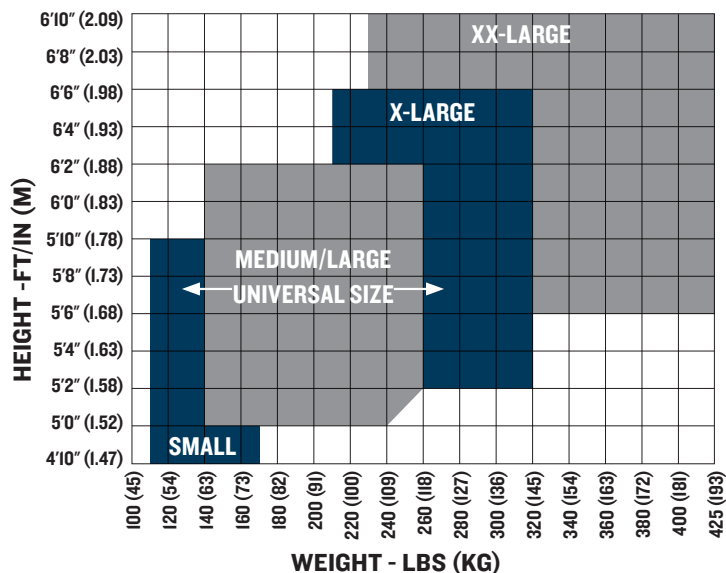

PROFORM™ F3

FUNCTION | FIT | FREEDOM



LABEL PACK & PROTECTION

Keeps product labels protected from the elements and allows for personalization



DUAL BACK PAD SYSTEM

Dual back pad system provides cooling airflow and breathability and can be repositioned after a fall to reduce pressure on the clavicle




IMPACT INDICATOR

Clearly shows if the harness has been involved in a fall



SRL BUMPER

Integrated SRL bumper protects the lower back when wearing personal SRL's



WebAlert™ 2 INSPECTABLE WEBBING

WebAlert 2 is red inside to identify damaged webbing, resistant to cuts, and has a weather resistant coating



GEAR LOOPS

Allows connection of tool lanyards to secure tools



425 LB. RATED

Werner ProForm F3 harnesses are athletically styled and constructed with lightweight materials to deliver maximum comfort and unrelenting safety performance.

ProForm F3 delivers function, fit and freedom through the relief cords, dual back pad system, WebAlert™2 inspectable webbing, integrated SRL bumper, cam torso adjustment, and all aluminum hardware.

PATENTED RELIEF CORD POST-FALL ADJUSTMENT SYSTEM



Achieve Chair In The Air™ position in seconds, relieving the pressure on femoral arteries





Standard Harness



Climbing Harness



Positioning Harness



Climbing/Positioning Harness



Construction Harness




Climbing/Construction Harness

MODEL	MODEL & DESCRIPTION
H01300*	Standard Harness, Quick Connect Legs
H01200*	Standard Harness, Tongue Buckle Legs
H01300*XS	Standard Harness, Quick Connect Legs, Steel Hardware
H01200*XS	Standard Harness, Tongue Buckle Legs, Steel Hardware
H02300*	Climbing Harness, Quick Connect Legs
H02200*	Climbing Harness, Tongue Buckle Legs
H03300*	Positioning Harness, Quick Connect Legs
H03200*	Positioning Harness, Tongue Buckle Legs

MODEL	MODEL & DESCRIPTION
H06300*	Climbing/Positioning Harness, Quick Connect Legs
H06200*	Climbing/Positioning Harness, Tongue Buckle Legs
H03310*	Construction Harness, Quick Connect Legs
H03210*	Construction Harness, Tongue Buckle Legs
H03310*XS	Construction Harness, Quick Connect Legs, Steel Hardware
H03210*XS	Construction Harness, Tongue Buckle Legs, Steel Hardware
H06310*	Climbing/Construction Harness, Quick Connect Legs
H06210*	Climbing/Construction Harness, Tongue Buckle Legs

“*” IN MODEL NUMBER INDICATES THE SIZE OF THE HARNESS (i.e. 1=small, 2=M, -L, 4=XL, 5=XXL)

INSPECTABLE HARNESS




WebAlert™
INSPECTABLE WEBBING
WebAlert webbing makes wear or damage clearly visible



BACK PAD
Improves user comfort



WEB TERMINATIONS
STRAP KEEPERS
Keeps excess webbing organized and out of the way



QUICK CONNECT
CHEST BUCKLE
Provides fast and easy connection



IMPACT INDICATOR
Clearly shows if the harness has been involved in a fall




LABEL PROTECTION
Durable cover easily reveals labels



425 LB. RATED

Blue Armor comes with Legs Straps with fast, easy, quick connect buckles or tongue buckles, ideal when multiple workers use same harness and a Lanyard Keeper to keep lanyard end secure and out of the way when not in use.



It has a lightweight compression comfort back pad with breathable, sweat absorbing foam helps keep the harness untangled when donning.

The patented Relief Handle will achieve the Chair In The Air™ position in seconds.



PATENTED
RELIEF HANDLE
POST-FALL ADJUSTMENT SYSTEM



Achieve Chair In The Air™ position in seconds, relieving the pressure on femoral arteries

Standard Harness

Back D-Ring, Quick Connect Legs (shown)



SMALL

H113001 Quick Connect Legs
H112001 Tongue Buckle Legs

MEDIUM/LARGE

H113002 Quick Connect Legs
H112002 Tongue Buckle Legs

X-LARGE

H113004 Quick Connect Legs
H112004 Tongue Buckle Legs

XX-LARGE

H113005 Quick Connect Legs
H112005 Tongue Buckle Legs



Climbing Harness

Back and Chest D-Rings, Quick Connect Legs (shown)



SMALL

H123001 Quick Connect Legs
H122001 Tongue Buckle Legs

MEDIUM/LARGE

H123002 Quick Connect Legs
H122002 Tongue Buckle Legs

X-LARGE

H123004 Quick Connect Legs
H122004 Tongue Buckle Legs

XX-LARGE

H123005 Quick Connect Legs
H122005 Tongue Buckle Legs



Positioning Harness

Back and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H133001 Quick Connect Legs
H132001 Tongue Buckle Legs

MEDIUM/LARGE

H133002 Quick Connect Legs
H132002 Tongue Buckle Legs

X-LARGE

H133004 Quick Connect Legs
H132004 Tongue Buckle Legs

XX-LARGE

H133005 Quick Connect Legs
H132005 Tongue Buckle Legs



Climbing/Positioning Harness

Back, Chest, and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H163001 Quick Connect Legs
H162001 Tongue Buckle Legs

MEDIUM/LARGE

H163002 Quick Connect Legs
H162002 Tongue Buckle Legs

X-LARGE

H163004 Quick Connect Legs
H162004 Tongue Buckle Legs

XX-LARGE

H163005 Quick Connect Legs
H162005 Tongue Buckle Legs



Construction Harness

Back and Hip D-Rings, Tool Belt, Quick Connect Legs (shown)



SMALL

H133101 Quick Connect Legs
H132101 Tongue Buckle Legs

MEDIUM/LARGE

H133102 Quick Connect Legs
H132102 Tongue Buckle Legs

X-LARGE

H133104 Quick Connect Legs
H132104 Tongue Buckle Legs

XX-LARGE

H133105 Quick Connect Legs
H132105 Tongue Buckle Legs



Retrieval Harness

Back and Shoulder D-Rings, Quick Connect Legs (shown)



SMALL

H143001 Quick Connect Legs
H142001 Tongue Buckle Legs

MEDIUM/LARGE

H143002 Quick Connect Legs
H142002 Tongue Buckle Legs


X-LARGE

H143004 Quick Connect Legs
H142004 Tongue Buckle Legs

XX-LARGE

H143005 Quick Connect Legs
H142005 Tongue Buckle Legs





WebAlert™ INSPECTABLE WEBBING

WebAlert webbing makes wear or damage clearly visible




BACK PAD

Improves user comfort



WEB TERMINATIONS STRAP KEEPERS

Keeps excess webbing organized and out of the way



PASS THROUGH CHEST BUCKLE

Easy and fast adjustment and fastening



IMPACT INDICATOR

Clearly shows if the harness has been involved in a fall




LABEL PROTECTION

Durable cover easily reveals labels



425 LB. RATED

Blue Armor comes with Legs Straps with fast, easy, quick connect buckles or tongue buckles, ideal when multiple workers use same harness and a Lanyard Keeper to keep lanyard end secure and out of the way when not in use.



It has a lightweight compression comfort back pad with breathable, sweat absorbing foam helps keep the harness untangled when donning.

The patented Relief Handle will achieve the Chair In The Air™ position in seconds.



PATENTED RELIEF HANDLE POST-FALL ADJUSTMENT SYSTEM



Achieve Chair In The Air™ position in seconds, relieving the pressure on femoral arteries

Standard Harness

Back D-Ring, Pass Through Legs (shown)



SMALL

H211001 Pass Through Legs
H212001 Tongue Buckle Legs

MEDIUM/LARGE

H211002 Pass Through Legs
H212002 Tongue Buckle Legs

X-LARGE

H211004 Pass Through Legs
H212004 Tongue Buckle Legs

XX-LARGE

H211005 Pass Through Legs
H212005 Tongue Buckle Legs

XXX-LARGE

H212006 Tongue Buckle Legs



Climbing Harness

Back and Chest D-Rings, Pass Through Legs (shown)



SMALL

H221001 Pass Through Legs
H222001 Tongue Buckle Legs

MEDIUM/LARGE

H221002 Pass Through Legs
H222002 Tongue Buckle Legs

X-LARGE

H221004 Pass Through Legs
H222004 Tongue Buckle Legs

XX-LARGE

H221005 Pass Through Legs
H222005 Tongue Buckle Legs



Positioning Harness

Back and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H231001 Pass Through Legs
H232001 Tongue Buckle Legs

MEDIUM/LARGE

H231002 Pass Through Legs
H232002 Tongue Buckle Legs

X-LARGE

H231004 Pass Through Legs
H232004 Tongue Buckle Legs

XX-LARGE

H231005 Pass Through Legs
H232005 Tongue Buckle Legs



Climbing/Positioning Harness

Back, Chest, and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H261001 Pass Through Legs
H262001 Tongue Buckle Legs

MEDIUM/LARGE

H261002 Pass Through Legs
H262002 Tongue Buckle Legs

X-LARGE

H261004 Pass Through Legs
H262004 Tongue Buckle Legs

XX-LARGE

H261005 Pass Through Legs
H262005 Tongue Buckle Legs



Construction Harness

Back and Hip D-Rings, Tool Belt, Tongue Buckle Legs (shown)



SMALL

H231101 Pass Through Legs
H232101 Tongue Buckle Legs

MEDIUM/LARGE

H231102 Pass Through Legs
H232102 Tongue Buckle Legs

X-LARGE

H231104 Pass Through Legs
H232104 Tongue Buckle Legs

XX-LARGE

H231105 Pass Through Legs
H232105 Tongue Buckle Legs



Retrieval Harness

Back and Shoulder D-Rings, Tongue Buckle Legs (shown)



SMALL

H241001 Pass Through Legs
H242001 Tongue Buckle Legs

MEDIUM/LARGE

H241002 Pass Through Legs
H242002 Tongue Buckle Legs

X-LARGE

H241004 Pass Through Legs
H242004 Tongue Buckle Legs

XX-LARGE

H241005 Pass Through Legs
H242005 Tongue Buckle Legs





LANYARD KEEPER

Keeps the lanyard secure and out of the way when not in use




D-RING

Adjustable for optimal fit on different body sizes



STRAP KEEPERS

Keeps excess webbing organized and out of the way



PASS THROUGH CHEST BUCKLE

Easy and fast adjustment and fastening

*Also available in Litefit Plus w/ Quick Connect



LABEL PROTECTION

Durable cover easily reveals labels



IMPACT INDICATOR

Clearly shows if the harness has been involved in a fall



425 LB. RATED

LITEFIT comes with tongue buckle Leg Straps and is ideal when multiple workers use same harness, or convenient pass through buckles and a Lanyard Keeper to keep lanyard end secure and out of the way when not in use.

The patented Relief Handle will achieve the Chair In The Air™ position in seconds.



PATENTED RELIEF HANDLE POST-FALL ADJUSTMENT SYSTEM



Achieve Chair In The Air™ position in seconds, relieving the pressure on femoral arteries

Standard Harness

Back D-Ring, Tongue Buckle Legs (shown)



SMALL

H311001 Pass Through Legs
H312001 Tongue Buckle Legs

MEDIUM/LARGE

H311002 Pass Through Legs
H312002 Tongue Buckle Legs

X-LARGE

H311004 Pass Through Legs
H312004 Tongue Buckle Legs

XX-LARGE

H311005 Pass Through Legs
H312005 Tongue Buckle Legs



Climbing Harness

Back and Chest D-Rings, Pass Through Legs (shown)



SMALL

H321001 Pass Through Legs
H322001 Tongue Buckle Legs

MEDIUM/LARGE

H321002 Pass Through Legs
H322002 Tongue Buckle Legs

X-LARGE

H321004 Pass Through Legs
H322004 Tongue Buckle Legs

XX-LARGE

H321005 Pass Through Legs
H322005 Tongue Buckle Legs



Positioning Harness

Back and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H331001 Pass Through Legs
H332001 Tongue Buckle Legs

MEDIUM/LARGE

H331002 Pass Through Legs
H332002 Tongue Buckle Legs

X-LARGE

H331004 Pass Through Legs
H332004 Tongue Buckle Legs

XX-LARGE

H331005 Pass Through Legs
H332005 Tongue Buckle Legs



Climbing/Positioning Harness

Back, Chest, and Hip D-Rings, Tongue Buckle Legs (shown)



SMALL

H361001 Pass Through Legs
H362001 Tongue Buckle Legs

MEDIUM/LARGE

H361002 Pass Through Legs
H362002 Tongue Buckle Legs

X-LARGE

H361004 Pass Through Legs
H362004 Tongue Buckle Legs

XX-LARGE

H361005 Pass Through Legs
H362005 Tongue Buckle Legs



Construction Harness

Back and Hip D-Rings, Tongue Buckle Legs, Tool Belt (shown)



SMALL

H332101 Tongue Buckle Legs

MEDIUM/LARGE

H332102 Tongue Buckle Legs

X-LARGE

H332104 Tongue Buckle Legs

XX-LARGE

H332105 Tongue Buckle Legs



LITEFIT™ PLUS Harness

Quick Connect Chest Connection, Enhanced Comfort Back Pad



SMALL

H312001XQP Standard, Tongue Buckle Legs
H332001XQP Positioning, Tongue Buckle Legs
H332101XQP Construction, Tongue Buckle Legs

MEDIUM/LARGE


H312002XQP Standard, Tongue Buckle Legs
H332002XQP Positioning, Tongue Buckle Legs
H332102XQP Construction, Tongue Buckle Legs

X-LARGE

H312004XQP Standard, Tongue Buckle Legs
H332004XQP Positioning, Tongue Buckle Legs
H332104XQP Construction, Tongue Buckle Legs

XX-LARGE

H312005XQP Standard, Tongue Buckle Legs
H332005XQP Positioning, Tongue Buckle Legs
H332105XQP Construction, Tongue Buckle Legs



PASS THROUGH CHEST BUCKLE

Easy and fast adjustment and fastening

IMPACT INDICATOR

Clearly shows if the harness has been involved in a fall

LEG STRAP


Available with tongue buckles, ideal when multiple workers use same harness, or convenient pass through buckles

SLIDING BACK PAD

Adjustable for universal fit on different body sizes

LANYARD KEEPER

Keeps lanyard end secure and out of the way when not in use



STRAP KEEPERS

Keeps excess webbing organized and out of the way

LABEL PROTECTION

Durable cover easily reveals labels



310 LB. RATED

Standard Harness



Back D-Ring
Tongue Buckle,
Legs (shown)

UNIVERSAL

H411002
Pass Through Legs
H412002
Tongue Buckle Legs



Positioning Harness



Back and Hip
D-Rings, Pass
Through
Legs (shown)

UNIVERSAL

H432002
Tongue Buckle Legs
H431002
Pass Through Legs



Construction Harness



Back and Hip D-Rings,
Tongue Buckle Legs,
Tool Belt, Removable
Shoulder Pads

SMALL

H432101

MEDIUM/LARGE

H432102

X-LARGE

H432104

XX-LARGE

H432105



ARC FLASH HARNESS

Compatible with R290006 SRL on page 29 and Arc Flash Lanyards on page 34. The Arc Flash Harness has built-in relief handles

Standard Harness



Back D-Ring,
Pass Through Legs

SMALL
H914001

MEDIUM/LARGE
H914002

X-LARGE
H914004

XX-LARGE
H914005



Positioning Harness



Back and Hip D-Rings,
Pass Through Legs

SMALL
H934001

MEDIUM/LARGE
H934002

X-LARGE
H934004

XX-LARGE
H934005



Construction Harness



Back and Hip D-Rings,
Pass Through Legs,
Tool Belt

SMALL
H934101

MEDIUM/LARGE
H934102

X-LARGE
H934104

XX-LARGE
H934105



- Meets requirements of ASTM F887
- 1¾" Kevlar® Webbing
- Dielectric Hardware

- Built in Relief Handle system assists user to achieve Chair In The Air™ position in seconds after a fall arrest

- SIGMA™ flame resistant (FR) Backpad, Waist pad and protective label cover

WELDING HARNESS

Welding High Heat harness is specifically designed for welding applications. Equipped with built-in relief handles



Standard Harness

For fall arrest only, features only a dorsal D-Ring on the back

SMALL
H913001 Quick Connect Legs

MEDIUM/LARGE
H913002 Quick Connect Legs

X-LARGE
H913004 Quick Connect Legs

XX-LARGE
H913005 Quick Connect Legs



- Whole Harness of Kevlar Web – Resists 700°F Char Temperature
- Nomex Strap Keepers
- Built in Relief Handle system assists user to achieve Chair In The Air™ position in seconds after a fall arrest
- Built in Suspension Trauma Relief
- Offsetting color for visibility

HI-VIZ HARNESS

The harness with a higher visibility web



Standard Harness

Back D-Ring, Tongue Buckle
Legs (shown)

MEDIUM/LARGE
H112002XHV

X-LARGE
H112004XHV



Positioning Harness

Back and Hip D-Rings, Pass
Through Legs

MEDIUM/LARGE
H132002XHV

X-LARGE
H132004XHV



Tool/Positioning Belt

Hip D-Rings



- SMALL**
M210001
- MEDIUM/LARGE**
M210003
- X-LARGE**
M210004
- XX-LARGE**
M210005

Belt with Pad



- SMALL**
M110001
- MEDIUM/LARGE**
M110003
- X-LARGE**
M110004
- XX-LARGE**
M110005

LiteFit Replacement Belt



- 38-48" BELT**
M610001
- 41-51" BELT**
M610002
- 45-55" BELT**
M610004
- 48-58" BELT**
M610005

ProForm/Blue Armor Replacement Belt



- 38-48" BELT**
M620001
- 41-51" BELT**
M620002
- 45-55" BELT**
M620004
- 48-58" BELT**
M620005
- 52-62" BELT**
M620006

Shoulder Pads

M010001



M010003



Twin Leg SRL Spacer

Designed to provide a connection point for twin leg SRLs. Prevents SRLs from sliding down the harness webbing and holds the dorsal D-ring in an upright position.

M020000



Leg Pads

M010005



D-Ring Extender

18" LENGTH
M010000



DROP SAFETY EQUIPMENT

Protect your tools, property and workers below. Quickly attaches to existing tools and meets ANSI/ISEA 121-2018

M440001 – Smartphone Jacket with 1lb Tether

- Meets ANSI/ISEA121-2018
- Easily secures your phone at height to protect it from dropping
- Jacket fits smartphones up to 3.8" x 7.1"
- Clear captive touch screen cover with audio perforations
- Transparent rear to accommodate all cameras and opening for fingerprint access
- Retractable tether included



M440002 – Tape Measure Jacket

- Meets ANSI/ISEA121-2018
- Quickly attaches to most commonly used tape measures
- No hook and loop straps to get dirty and degrade



M440003 – Drill Jacket

- Meets ANSI/ISEA121-2018
- Quickly attaches to most commonly used cordless power drills
- No hook and loop straps or zippers to wear out and degrade
- Designed for use with 5lb Tool Tether



M430001 – 1lb Self Retracting Tool Tether

- Meets ANSI/ISEA 121-2018
- Maximum workload capacity: 1 lb
- Polymer covered stainless steel cable extends up to 42 inches
- Durable, impact resistant polycarbonate housing with stainless steel inner spring
- Anodized aluminum dual auto-locking carabiner
- Retraction force is 8oz



M430005 – 5lb Self Retracting Tool Tether

- Meets ANSI/ISEA 121-2018
- Maximum workload capacity: 5 lb
- Polymer covered stainless steel cable extends up to 60 inches
- Durable, impact resistant glass filled ABS housing with stainless steel inner spring
- Anodized aluminum dual auto-locking carabiner
- Nylon strap / belt loop opening
- Retraction force is 6oz



M410001, 2, & 3 – Tool Attachments

- Meets ANSI/ISEA 121-2018
- Maximum workload capacity: 5 lb
- Quickly attaches to existing tools
- Polyester web w/stainless steel D-Ring
- Tool Attachment: M400001 5lb Rated Tool Tape
- Tether Attachment: D-Ring
- One pack includes 3 of same size tool attachments shown



M400001 – 5 lb. Rated Tool Tape

- Meets ANSI/ISEA 121-2018
- 1 in x 120 inch roll
- Tape activates and bonds as it stretches
- Use with M410001, M410002 or M410003 Tool Attachments



M400003 – Tool Tether

- Heavy duty 15lb tool capacity
- Stretch cord surrounded by durable webbing
- Retracts to 30in and extends to 50in
- Includes carabiner and drawstring
- Nylon material with drawstring and Carabiner end connectors



M400004 – Hard Hat Tether

- Meets ANSI/ISEA 121-2018
- Fits accessory slot on hard hat
- Clamp attachment to hard hat
- Buckle end fits around shoulder strap
- Hard hat not included



SELF RETRACTING LIFELINE BRANDS

MAX PATROL Self Retracting Lifelines



- Provides maximum freedom of movement with a higher line-lock performance
- Meets the ANSI requirements
- Visual differentiation provides clear identification
Class 1: Non-Leading Edge (Blue) or
Class 2: Leading Edge (Yellow)
- Durable recessed labels are attached and protected to aid inspection
- The industry's best carry handle for better transportation, aiding in productivity *on select models
- First Leading Edge SRL approved for 3 different surfaces
- 400 lb rated capacity
- Available in 11' length (UHMWPE/Polyester)
- Available in 20', 30' & 50' lengths (Galvanized Cable)
Leading Edge available in 20', 30', 50' & 65' lengths (Galvanized Cable) and 6' Web Leading Edge



- Compact and lightweight personal SRL weighing less than 2.5 lbs
- Meets the ANSI requirements
- Visual differentiation provides clear identification
Class 1: Non-Leading Edge (Blue) or
Class 2: Leading Edge (Yellow)
- Durable recessed labels are attached and protected to aid inspection
- Available in Single and Twin Leg models
- Available in 6' length (Dyneema/Polyester)
- Available in 8' Cable Models for Leading Edge use
- Available in Tie-Back Model
- 400 lb. Rated capacity
- Available in 6' web models for Leading Edge use



- The affordable alternative for small web SRLs
- Meets the ANSI requirements
- Available in 7' & 11' lengths (Dyneema/Polyester)



- Longest length SRLs in Werner offering
- Meets the ANSI requirements
- Available in 7', 11', 18' & 50'; Twin Leg 7' (Dyneema/Polyester)
- Available in 10', 20' & 30', 60' lengths (Galvanized Cable)
- Available in 6' Arc Flash Rated Model

Max Patrol Self Retracting Lifelines provides maximum freedom of movement with a higher line-lock performance with a 400 lb rated capacity.

Max Patrol Web SRL

UHMWPE/Polyester Webbing with WebAlert™, Thermoplastic Housing, Carabiner

11' LENGTH STEEL SNAP HOOK

R430011 3.5 lbs

11' LENGTH ALUMINUM REBAR HOOK

R430011-R 3.9 lbs

11' LENGTH STEEL FORM HOOK

R430011-SR 4.2 lbs

- 11 foot working range
- Visual differentiation provides clear identification
Class 1: Non-Leading Edge (Blue)
- Durable recessed labels are attached and protected to aid inspection
- Swivel top with steel carabiner included
- Aluminum rebar hook has a gate opening of 2 7/16 inches (63 mm)
- Steel form hook has a gate opening of 2 3/4 inches (70 mm)
- Snap hooks, rebar hooks, form hooks and carabiners are self-locking with a minimum tensile break strength of 5,000 pounds, and a 3,600 pound gate rating

ANSI Z359.14-2014 OSHA 29 CFR 1910 & 1926



Max Patrol Cable SRL

Galvanized Cable, Thermoplastic Housing, Carabiner

20' LENGTH

R410020 8.2 lbs

30' LENGTH

R410030 9.9 lbs

50' LENGTH

R410050 14.7 lbs

- Robust line of 20', 30' and 50'
- Visual differentiation provides clear identification
Class 1: Non-Leading Edge (Blue)
- Durable recessed labels are attached and protected to aid inspection
- Cable SRL's
- Improved line-lock performance
- Rugged design for durability in construction environments
- Indicating swivel Saphook and swivel top with Carabiner included
- Carry-handle allows for easier transport

ANSI Z359.14 OSHA 1910 & 1926



LEADING EDGE

Max Patrol Leading Edge with 3/16" Galvanized Cable Lifeline and a double-locking Snaphook is approved for use over steel beam, precast concrete and B-Deck. It meets ANSI and OSHA Standards.



- Approved for use over steel beam, precast concrete and b-deck.
- Meets ANSI z359.14 and OSHA Standards
- Visual differentiation provides clear identification
- Minimizes Fall Arrest Distance to < 24" when used overhead
- Max Patrol Freedom of Movement with line-lock performance
- Impact Resistant Polymer Housing with swivel top
- Carrying handle allows for easier transport
- Durable recessed labels and shock pack cover to aid inspection
- Supports workers up to 400 lbs.

Max Patrol Leading Edge

Thermoplastic Housing, Carabiner, Double Locking Snaphook

20' LENGTH

R410020LE 9.3 lbs

30' LENGTH

R410030LE 9.9 lbs

50' LENGTH

R410050LE

65' LENGTH

R410065LE 18 lbs

Standard Compliance Leading Edge Use:

ANSI z359.14, 310 lbs. **OSHA** 1910 & 1926, 310 lbs.

Standard Compliance Overhead Use:


ANSI z359.14, 310 lbs. **OSHA** 1910 & 1926, 400 lbs.



LIGHTWEIGHT SAFETY IN THE PALM OF YOUR HAND

LEADING EDGE

Compact and Versatile Leading Edge Protection. Low profile and compact with integrated to harness versatility. The steel harness web connector allows for quick and easy attachment. Tested and approved over steel beam, B-Deck and precast concrete. As an ANSI Class 2 device, the Bantam is ideal for low clearance applications when attached overhead. Supports worker up to 400 lbs.

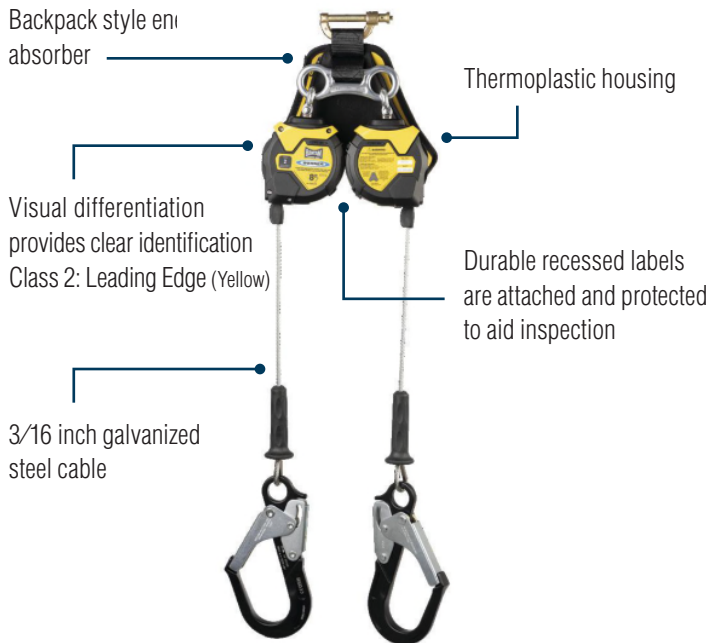

Leading Edge 8' Steel Cable

3/16" Galvanized Steel Cable
Thermoplastic Housing Energy Absorbing Pack

SINGLE LEG

STEEL SWIVEL SNAPHOOK

R410008LE

ALUMINUM REBAR HOOK

R410008LE-R

STEEL FORM HOOK

R410008LE-SR

TWIN LEG

STEEL SWIVEL SNAPHOOK


R413008LE

ALUMINUM REBAR HOOK

R413008LE-R

STEEL FORM HOOK

R413008LE-SR

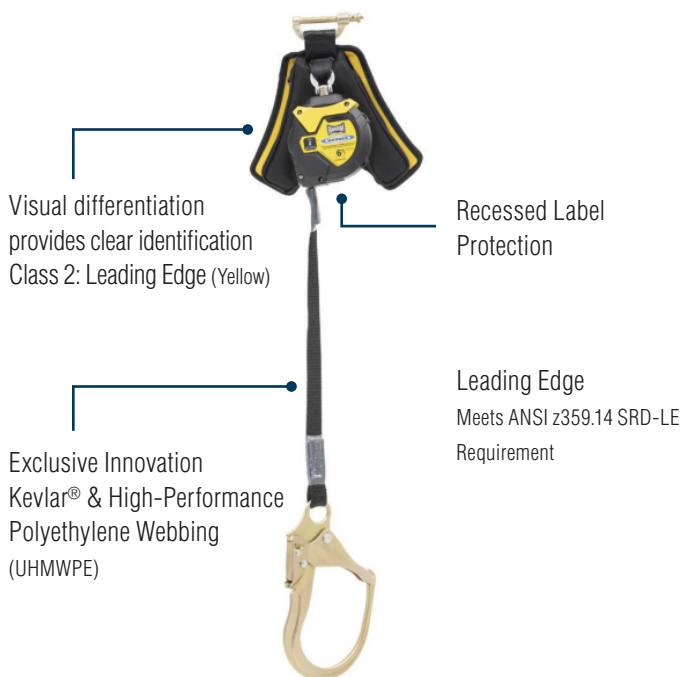

Bantam Web 6' Leading Edge

SINGLE LEG

STEEL SWIVEL SNAPHOOK

R430006LE

ALUMINUM REBAR HOOK

R430006LE-R

STEEL FORM HOOK

R430006LE-SR

TWIN LEG

STEEL SWIVEL SNAPHOOK

R433006LE

ALUMINUM REBAR HOOK

R433006LE-R

STEEL FORM HOOK

R433006LE-SR



LIGHTWEIGHT SAFETY IN THE PALM OF YOUR HAND

BANTAM Extremely compact and lightweight, weighing less than 2.5 lbs, Bantam 6 is made of durable Dyneema/Polyester and is available in Single and Twin Leg models. Meets the ANSI requirements of and 400 lb. capacity per OSHA.



6' Bantam Web SRL

Dyneema® / Polyester Webbing
Impact Resistant Nylon Carabiner

SNAPHOOK

R430006 2.3 lbs

ALUMINUM REBAR

R430006-R 2.5 lbs

FORM HOOK

R430006-SR 3.3 lbs

ANSI Z359.14, 24"

OSHA 1910 & 1926



6' Bantam Twin Leg Web SRL

Dyneema® / Polyester Webbing
Impact Resistant Nylon Twinleg Carabiner

SNAPHOOK

R431006 5.5 lbs

ALUMINUM REBAR

R431006-R 5.7 lbs

FORM HOOK

R431006-SR 7.6 lbs

ANSI Z359.14, 24"

OSHA 1910 & 1926



6' Bantam Twin Leg Web SRL

Dyneema® / Polyester Webbing
Impact Resistant Nylon Carabiner

SNAPHOOK

R433006 5.3 lbs

ALUMINUM REBAR

R433006-R 5.5 lbs

FORM HOOK

R433006-SR 7.4 lbs



6' Bantam Twin Leg Web SRL

Dyneema® / Polyester Webbing
Impact Resistant Nylon Twinleg Carabiner

SNAPHOOK

R434006 5.5 lbs

ALUMINUM REBAR

R434006-R 7.0 lbs

FORM HOOK

R434006-SR 7.5 lbs



9' Tie-Back

Dyneema® / Polyester Webbing
Impact Resistant Nylon
Carabiner
Steel Tie-Back Saphook

SINGLE LEG

CARABINER

R430006TB

TWIN LEG

TWIN LEG CARABINER

R431006TB

TWIN LEG PIN ADAPTOR (A100531)

R433006TB

TWIN LEG SRL BRACKET (100331)

R434006TB

CONNECTING HARDWARE



Carabiner

A100301



Twin Leg Carabiner Adaptor

A100341



Twin Leg Pin Adaptor


A100531



Twin Leg SRL Adaptor

A100331

Available in 7' & 11' lengths in Dyneema/Polyester, Baseline is the affordable alternative for small web SRLs. Meets the ANSI requirements.

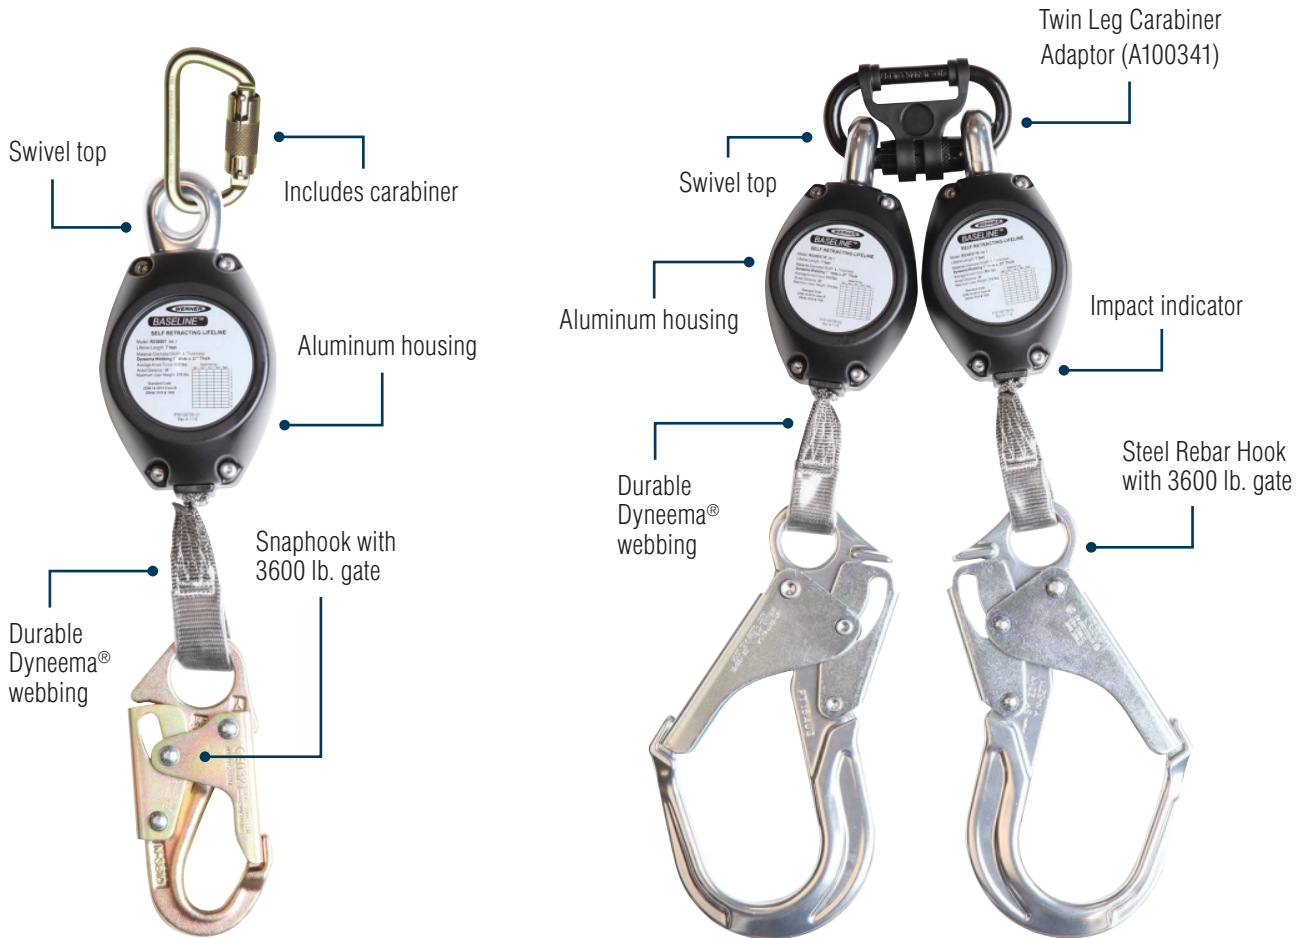

Baseline

Dyneema Lifeline, Aluminum Housing, Carabiner

7' LENGTH SNAPHOOK

R530007 3.5 lbs

7' LENGTH ALUMINUM REBAR

R530007-R 3.7 lbs

7' LENGTH STEEL REBAR

R530007-SR 4.0 lbs

11' LENGTH SNAPHOOK

R530011 4.0 lbs

11' LENGTH ALUMINUM REBAR

R530011-R 4.6 lbs

11' LENGTH STEEL REBAR

R530011-SR 4.8 lbs

- Internal braking mechanism keeps fall distance < 36"

Baseline Twin Leg

Dyneema Lifeline, Aluminum Housing, Twinleg Carabiner

7' LENGTH SNAPHOOK

R531007 6.1 lbs

7' LENGTH ALUMINUM REBAR

R531007-R 7.0 lbs

7' LENGTH STEEL REBAR

R531007-SR 7.5 lbs

- Twin Leg for 100% Tie-Off
- Twin Leg Carabiner Adaptor connects through webbing under harness D-Ring
- Aluminum rebar hooks with 3600 lb. gate

ANSI Z359.14 OSHA 1910 & 1926

AutoCoil 2 Self-Retracting Lifelines are designed to enhance safety performance and productivity. The right tool for the job with models ranging from 7 ft web to 60 ft galvanized cable giving the user the freedom to work and increase reach from a single anchor point.



- Security When Needed - Internal braking mechanism for reduced fall clearances
- Proven design meets applicable ANSI standards and OSHA regulatory requirements
- Extend life through Werner Retractable Repair and Maintenance Program



Dyneema® / Polyester Web

Snaphook, Carabiner



Twin Leg Dyneema® / Polyester Web

Swivel Snaphook, Carabiner



Arc Flash / Aramid Web


Snaphook, Carabiner

MODEL	LIFELINE LENGTH	LIFELINE MATERIAL	HOUSING MATERIAL	LIFELINE CONNECTOR	ANCHORAGE CONNECTOR	WEIGHT
R210010	10'	Galvanized Cable	ThermoPlastic	Swivel Snaphook	Carabiner	4.6 lbs
R210020	20'	Galvanized Cable	ThermoPlastic	Swivel Snaphook	Carabiner	7.2 lbs
R210030	30'	Galvanized Cable	ThermoPlastic	Swivel Snaphook	Carabiner	8.8 lbs
R210040	40'	Galvanized Cable	ThermoPlastic	Swivel Snaphook	Carabiner	11.4 lbs
R210060	60'	Galvanized Cable	ThermoPlastic	Swivel Snaphook	Carabiner	16.7 lbs
R213030	30'	Galvanized Cable	Aluminum	Swivel Snaphook	Carabiner	9.7 lbs
R213060	60'	Galvanized Cable	Aluminum	Swivel Snaphook	Carabiner	18.0 lbs
R230007	7'	Dyneema® / Polyester	Aluminum	Snaphook	Carabiner	2.9 lbs
R231007	Twinleg 7'	Dyneema® / Polyester	Aluminum	Swivel Snaphook	Carabiner	6.1 lbs
R231007-R	Twinleg 7'	Dyneema® / Polyester	Aluminum	Rebar Hook	Carabiner	7.5 lbs
R230011	11'	Dyneema® / Polyester	Aluminum	Snaphook	Carabiner	2.7 lbs
R230011-R	11'	Dyneema® / Polyester	Aluminum	Rebar Hook	Carabiner	4.4 lbs
R230018	18'	Dyneema® / Polyester	ThermoPlastic	Snaphook	Carabiner	4.8 lbs
R230050	50'	Dyneema® / Polyester	ThermoPlastic	Snaphook	Carabiner	12.5 lbs
R290006	6'	Aramid Web	Aluminum	Snaphook	Carabiner	4.4 lbs

LANYARD BRANDS



DeCoil™
ENERGY ABSORBING LANYARD



WebAlert™
WebAlert inspectable polyester webbing makes wear and damage visible and obvious making inspection easier



SoftCoil™
INTERNAL ENERGY ABSORBING LANYARD



SNAPHOOK
Double Locking Snaphook with gate rating of 3,600 lbs.




Positioning
NON ENERGY ABSORBING



DCELL™
SHOCK PACK
Werner DCELL Shock Pack is a deceleration device designed for controlled tearing action to reduce fall arrest forces on the user



ARC Flash



ELASTIC WEBBING
Contracts the lanyard length from 6' to 4', reducing the hazards of tripping, dragging, or snagging



IMPACT INDICATOR
Provides clear indication to users during inspection when lanyard has been involved in a fall and should be taken out of service

LANYARD END OPTIONS

All Werner Hooks are compliant with ANSI Z359 code.

SNAPHOOK



REBAR HOOK



2" GATE CARABINER



LOOP



LANYARD STYLES



NON ELASTIC SHOCK PACK ENERGY ABSORBING

These lanyards utilize a packed deceleration device (shock pack) designed for controlled tearing action to reduce fall arrest forces.



INTERNAL ENERGY ABSORBING

These lanyards feature a tubular, energy absorbing inner core that uses the entire length of the lanyard to absorb the energy of a fall and reduce the arresting forces on a user.



ELASTIC SHOCK PACK ENERGY ABSORBING

These lanyards utilize an energy absorbing device (shock pack) and have elastic webbing that contracts from 6' to 4' reducing the hazards of tripping, dragging, or snagging.



POSITIONING

These lanyards do not have any shock absorbing features and are only for work positioning or restraint applications.

LANYARD ATTRIBUTES



TIE-BACK

The tie-back feature allows these lanyards to act as both a connecting means and anchorage connector when no other acceptable anchor is available.



ADJUSTABLE

Adjustable in length to adapt to different working conditions.



TWINLEG (100% TIE-OFF)

Two lanyards connected together are meant for 100% tie-off, allowing the user to safely move from one location to another.



400#/12' FREE FALL

Dual purpose for either 400lb or 12' free fall applications.

DeCoil™

ENERGY ABSORBING LANYARD

DeCoil Snaphook

DCELL Shock Pack, 1" Web



3' SINGLE LEG
C311104

6' SINGLE LEG
C311100

6' TWINLEG
C411100



DeCoil Rebar Hook

DCELL Shock Pack, 1" Web



6' SINGLE LEG
C311200

6' TWINLEG
C411200



DeCoil Carabiner

DCELL Shock Pack, 1" Web



6' SINGLE LEG
C311400

6' TWINLEG
C411400



DeCoil Soft Loop

DCELL Shock Pack, 1" Web, Loop



6' SINGLE LEG
C313100

6' TWINLEG
C413100



DeCoil Tie-Back

DCELL Shock Pack, 1" Web



6' SINGLE LEG
C311701 Tie-Back

6' TWINLEG
C411701 Tie-Back

DeCoil Adjustable

DCELL Shock Pack, 1" Web



6' SINGLE LEG
C311102 Snaphook

6' TWINLEG
C411102 Snaphook
C411202 Rebar Hooks



DeCoil 400# 12' Free Fall

DCELL Shock Pack, 1" Web



- 6'-12' SINGLE LEG**
- C311120
- Snaphook
- C311220
- Rebar Hooks
- C311721
- Tie-Back
- 6' -12' TWINLEG**
- C411120
- Snaphook
- C411220
- Rebar Hooks
- C411721
- Tie-Back

DeCoil Cable

DCELL Shock Pack, 1/4" Vinyl Coated Cable



- 6' SINGLE LEG**
- C361400
- Snaphook/2" Carabiner
- C361100
- Snaphooks
- C361200
- Snaphook/Rebar Hook
- 6' TWINLEG**
- C461400
- Snaphook/2" Carabiner
- C461100
- Snaphooks
- C461200
- Snaphook/Rebar Hook

DeCoil Stretch

DCELL Shock Pack, Elastic Web



- 4'-6' SINGLE LEG**
 - C341100
 - Snaphooks
 - C341200
 - Snaphook/Rebar Hook
 - 4'-6' TWINLEG**
 - C441100
 - Snaphooks
 - C441200
 - Snaphook/Rebar Hook
 - C443100
 - Loop/Snaphook
- WebAlert™**
INSPECTABLE WEBBING

6' Leading Edge Lanyards

DeCoil Cable Lanyard

DCELL Shock Pack, 1/4" Vinyl Coated Cable



- 3' SINGLE LEG**
- C31120LE Snap Hook

DeCoil Cable Lanyard

DCELL Shock Pack, 1/4" Vinyl Coated Cable



- 6' SINGLE LEG**
- C361220LE Snap Hook

DeCoil Cable Lanyard

DCELL Shock Pack, 1/4" Vinyl Coated Cable



- 6' TWIN LEG**
- C461120LE Snap Hook

DeCoil Cable Lanyard

DCELL Shock Pack, 1/4" Vinyl Coated Cable



- 6' TWIN LEG**
- C461220LE Snap Hook

SoftCoil™

INTERNAL ENERGY ABSORBING LANYARD

SoftCoil

Energy Absorbing Inner Core, 2" Carabiner



6' SINGLE LEG
C351400 Snaphook

SoftCoil

Energy Absorbing Inner Core



6' SINGLE LEG
C351100 Snaphook
6' TWINLEG
C451100 Snaphook

SoftCoil

Energy Absorbing Inner Core, Loop



6' SINGLE LEG
C353100 Snaphook
6' TWINLEG
C453100 Snaphook

SoftCoil

Energy Absorbing Inner Core



6' SINGLE LEG
C351200 Snaphook
6' TWINLEG
C451200 Rebar Hook

Arc Flash

Arc Flash

Kevlar Web Design and FR Shock Pack meets ASTM F887, Snaphook



6' SINGLE LEG
C811100
6' TWINLEG
C911100

Arc Flash

Kevlar Web Design and FR Shock Pack meets ASTM F887, Loop, Snaphook



6' SINGLE LEG
C813100
6' TWINLEG
C913100

Arc Flash

Kevlar Web Design and FR Shock Pack meets ASTM F887, Snaphook, Rebar Hook



6' SINGLE LEG
C811200
6' TWINLEG
C911200

Arc Flash

Kevlar Web Design and FR Shock Pack meets ASTM F887, Loop, Rebar Hook



6' SINGLE LEG
C813200
6' TWINLEG
C913200

Positioning

NON ENERGY ABSORBING

Positioning

1" Web, Snaphook, Rebar Hook



6' SINGLE LEG
C111206

WebAlert™
INSPECTABLE WEBBING

Positioning

1" Web, Loop, Snaphook



6' SINGLE LEG
C113106

WebAlert™
INSPECTABLE WEBBING

Positioning

1/4" Vinyl Coated Cable, Snaphook



2' LENGTH
C161102

3' LENGTH
C161103

4' LENGTH
C161104

6' LENGTH
C161106

Positioning

1" Web, 2 Snaphook



2' LENGTH
C111102

3' LENGTH
C111103

4' LENGTH
C111104

5' LENGTH
C111105

6' LENGTH
C111106

WebAlert™
INSPECTABLE WEBBING

Positioning Adjustable

1" Web, Snaphook



6' SINGLE LEG
C111506

WebAlert™
INSPECTABLE WEBBING

Rebar Positioning

Web, 2 Snaphook, Rebar Hook



18" LENGTH
C111203

22" LENGTH
C111204

Rebar Positioning

Chain, 2 Snaphook, Rebar Hook



18" LENGTH
C191203

22" LENGTH
C191204

ANCHORAGE CONNECTORS

TEMPORARY AND REUSEABLE

5K CONCRETE ANCHORS

drill hole 3/4" x 3.5" deep



A510000
Blue 3/4"



A510000XGY
Gray 3/4"



A510000XK
Black 3/4"



A510000LB
Lt blue 3/4"



A510000XO
Orange 3/4"



A510000XR
Red 3/4"



A510000XY
Yellow 3/4"

TEMPORARY AND REUSEABLE

TOGGLE LOCKS



A410000
Blue 3/4"



A410000XGY
Gray 3/4"



A410000XK
Black 3/4"



A410000XO
Orange 3/4"



A410000XR
Red 3/4"



A410000XY
Yellow 3/4"



A410000XB
Blue 3/4"

TEMPORARY AND REUSEABLE

2" SWIVEL D-RING CONCRETE ANCHORS



A513000XR
Red 3/4"



A515000
Black 3/4" hole-plug feature

TEMPORARY AND REUSEABLE

10K CONCRETE ANCHORS



A510010
Black drill hole
1" x 4.5" deep
MBS 10,000 lbs



A510010XG
Green drill hole
1" x 4.5" deep
MBS 10,000 lbs

EVO REMOTE ANCHOR SYSTEM


The EVO Remote Anchor System makes every task safer, faster, and more efficient by allowing you to install and remove anchors throughout the job site without leaving the ground.



A311000
EVO ANCHOR



A312000
EVO GRIP ONLY



PERMANENT
A313000
EVO ANCHOR
RECEPTACLE
Green drill hole



PERMANENT
A314000
EVO ANCHOR
RECEPTACLE
Metal decking

ANCHORAGE CONNECTORS

A320003 MEGA-SWIVEL STEEL ANCHOR

SWIVEL TOP DESIGN

For concrete applications

**DRILL HOLE $\frac{5}{8}$ "
MINIMUM $\frac{1}{4}$ "
THICK STEEL**



**A320004
REPLACEMENT
STEEL BOLTS
10/PK**



A510001 10K MEGA-SWIVEL CONCRETE ANCHOR

Easily insert and remove from pre-drilled 3000 psi concrete, Minimum 7" concrete thickness

**HEAVY-DUTY
SWIVEL TOP DRILL
HOLE $\frac{3}{4}$ " X 5" DEEP**



**A510004
10K REPLACEMENT
CONCRETE BOLTS
10/PK**



STRAIGHT LOOP INSERT ANCHOR

Easily to use, permanent anchor system for cast in place



**A510021
STRAIGHT
LOOP INSERT
ANCHOR/25 PK**

**A510022
SWIVEL
STRAIGHT
LOOP BOLT**

**A510023
STRAIGHT
LOOP BOLT
ASST/25 PK**

A330000 D-RING ANCHORAGE CONNECTOR

Made with alloy and stainless steel

$2\frac{3}{8}$ " D-RING



A320001 D-BOLT ANCHOR

For $\frac{5}{8}$ " diameter fastener (not included)



A320002 D-BOLT ANCHOR ANCHOR

Integrated bolt with washer and nut

**$\frac{1}{2}$ " STUD DIAMETER
MAXIMUM 1" THICK
MATERIAL**



A420000 BUILDERS GRIP

**FITS HOLE
 $\frac{3}{4}$ " - $1\frac{1}{4}$ " DIAMETER
MAXIMUM $1\frac{1}{4}$ "
THICK MATERIAL**




A510002 10K HYBRID REMOVEABLE



A570007 WELD ON MOUNTING KIT



A320005 10K BACKER PLATE



5K SWIVEL ANCHORS

A320013 5K MEGA-SWIVEL



A320014
5K MEGA SWIVEL
STEEL ANCHOR
For steel applications



A320011
5K REPLACEMENT
BOLTS
For steel applications



A510011
5K MEGA SWIVEL
STEEL ANCHOR
For steel applications



A510012
5K REPLACEMENT
BOLTS
For steel applications

A570000 5K MEGA-SWIVEL STAINLESS



A570001
5K MEGA SWIVEL
STAINLESS STEEL
ANCHOR
For steel applications



A570003
5K REPLACEMENT
BOLTS
For steel applications



A570002
5K MEGA SWIVEL
STAINLESS STEEL
ANCHOR
For steel applications



A570004
5K REPLACEMENT
BOLTS
For steel applications

A216400 BULL RING ANCHORAGE CONNECTOR



A270000 WOOD TRUSS ANCHOR

Attic anchor



ANCHORAGE CONNECTORS

TEMPORARY AND REUSEABLE

BEAM ANCHORS

A540000 3"-12" BEAM SLIDER



A550000 3.5"-14" BEAM SLIDER



A555000 3.5"-14" HYBRID SLIDER



A560000 3.5"-14" BEAM SLIDER

One-hand adjustment



A550030 12"-30" BEAM SLIDER



A460000 I-BEAM FIXED ANCHOR

Ideal for vertical I-Beams. Designed to fit I-Beams from 4" to 14" wide and beam flange thickness of 1/4" to 1-1/4".



A450000 I-BEAM TROLLEY ANCHOR



A11400X ROLLER SLING ANCHOR



A114002
2" length

A114003
3" length

A114006
6" length

TEMPORARY

DROP THROUGH 5K ANCHOR



A710004 4" DROP THROUGH

A710004-1
4" plate
1' cable

A710004-2
4" plate
2' cable

A710004-6
4" plate
6' cable

A710004-8.5
4" plate
8.5' cable

A710006 6" DROP THROUGH

A710006-1
6" plate
1' cable

A710006-2
6" plate
2' cable

A710006-6
6" plate
6' cable

A710006-8.5
6" plate
8.5' cable

A710012 12" DROP THROUGH

A710012-1
12" plate
1' cable

A710012-2
12" plate
2' cable

A710012-6
12" plate
6' cable

A710012-8.5
12" plate
8.5' cable

A111100 CROSS ARM STRAP

Web, Loop, D-Ring, 3" Wear Pad

A111102
2' length

A111103
3' length

A111104
4' length

A111106
6' length

A111108
8' length

A111110
10' length



A111000 CROSS ARM STRAP

Web, O-Ring, D-Ring, 3" Wear Pad

A111002
2' length

A111003
3' length

A111020
20' length

A111004
4' length

A111006
6' length

A111025
25' length

A111008
8' length

A111010
10' length

A111030
30' length

A111012
12' length

A111015
15' length



A112000 CABLE CHOKER

5/16" vinyl coated cable, O-Rings

A112002
2' length

A112003
3' length

A112004
4' length

A112006
6' length

A112008
8' length



A211000 POUR-IN DISPOSABLE ANCHOR STRAP

Loop, D-Ring, Pack of 25

A211002
24" length

A211003
36" length

A211004
48" length

A211006
72" length

A211010
120" length



A211100 POUR-IN DISPOSABLE ANCHOR STRAP

Loop, Loop, Pack of 25

A211103
36" length

A211104
48" length

A211106
72" length



A113000 ANCHOR EXTENSION

1/4" vinyl coated cable, O-Ring, Snaphook

A113002
2' length

A113003
3' length

A113004
4' length



SAFETY ABOVE ALL.™

ANCHORAGE CONNECTORS

ROOF ANCHORS

Permanent Roof Anchor

For new construction or repairs.
Stainless steel design for extended service life

12" FOR TILE ROOFS

A220300

20" FOR TILE ROOFS

A220330



Reusable Roof Anchor

Plated steel with D-Ring now approved for metal decking 24 gauge or thicker

A210400



Single Piece Roof Anchor

Stainless steel design for extended service life

A728200



Knock Down Roof Anchor

A230400/12 Pk


A230400XBULK/60 Pk



Parapet Wall Anchor

14.5" MAXIMUM WALL THICKNESS

A567000

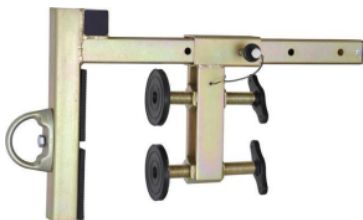

CARABINERS

Carabiner

3600 lb. Gate

3/4" GATE OPENING

A100301

2" GATE OPENING

A100303



HORIZONTAL LIFELINES

Temporary Rope Horizontal Lifeline

Lightweight, compact and durable

MODEL	LIFELINE LENGTH	DESCRIPTION	ANCHOR
L100030	30'	2-Man HLL	Cross Arm Strap
L100060	60'	2-Man HLL	Cross Arm Strap
L100100	100'	2-Man HLL	Cross Arm Strap
L102030	30'	2-Man HLL	Cross Arm Strap & Ratchet
L102060	60'	2-Man HLL	Cross Arm Strap & Ratchet
L102100	100'	2-Man HLL	Cross Arm Strap & Ratchet
L120030	30'	2-Man HLL	D-Bolt Anchors
L120060	60'	2-Man HLL	D-Bolt Anchors
L120100	100'	2-Man HLL	D-Bolt Anchors
L122030	30'	2-Man HLL	D-Bolt Anchors & Ratchet
L122060	60'	2-Man HLL	D-Bolt Anchors & Ratchet
L122100	100'	2-Man HLL	D-Bolt Anchors & Ratchet



Cable Horizontal Lifeline

CROSS ARM STRAPS

L103030, L103060




D-BOLT ANCHOR

L123030, L123060



MODEL	LIFELINE LENGTH	DESCRIPTION	ANCHOR
L103030	30'	2-Man Cable	A111104 Cross Arm Strap
L103060	60'	2-Man Cable	A111104 Cross Arm Strap
L123030	30'	2-Man Cable	A320001-WB D-Bolt Anchors
L123060	60'	2-Man Cable	A320001-WB D-Bolt Anchors
L153030	30'	2-Man Cable	N/A
L153060	60'	2-Man Cable	N/A
L163030	30'	Replacement Cable Assembly	N/A
L163060	60'	Replacement Cable Assembly	N/A
L400001	N/A	Concrete HLL Stanchion	N/A
L400002	N/A	Cast for Concrete HLL Stanchion	N/A
L400003	N/A	Intermediate HLL Stanchion	N/A

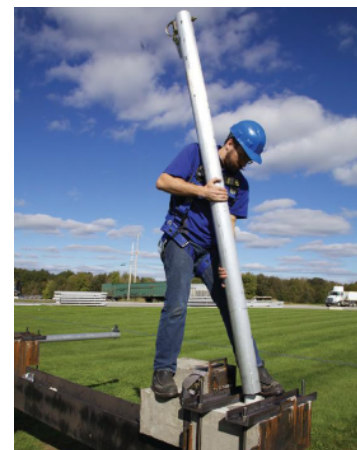

Concrete HLL Stanchion L400001

VERTICAL LIFELINES

Trailing Rope Grab

FOR 5/8" ROPE

L240000 (Stainless Steel)
L250000 (Steel)




Trailing Rope Grab

Shock Absorbing Lanyard, 3'

FOR 5/8" ROPE

L240001 (Stainless Steel)
L250001 (Steel)

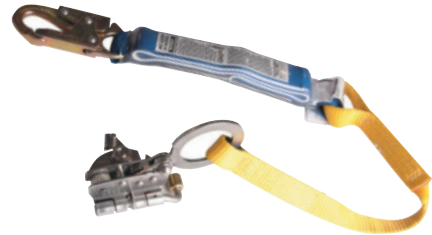

Manual Rope Adjuster

FOR 5/8" ROPE

L210100



Manual Rope Adjuster

Shock Absorbing Lanyard, 3'

FOR 5/8" ROPE

L210106



Vertical Lifeline

5/8" Poly Blend Rope



Rope Termination Plate

TERMINATION FOR 5/8" ROPE

A310000



30' LENGTH
L201030

100' LENGTH
L201100

200' LENGTH
L201200

300' LENGTH
L201300

35' LENGTH
L201035

125' LENGTH
L201125

225' LENGTH
L201225

325' LENGTH
L201325

50' LENGTH
L201050 (shown)

150' LENGTH
L201150

250' LENGTH
L201250

350' LENGTH
L201350

75' LENGTH
L201075

175' LENGTH
L201175

275' LENGTH
L201275

BULK 600' SPOOL
L201600B



Personalize your fall protection equipment with custom logo capability on tool bags and harnesses. Aerial Kits and Harnesses have an option to have a custom logo applied.



BAG LOGO SPECIFICATIONS

5" High x 5" Wide
Two colors maximum
One side of bag only, other side contains the Werner Logo



HARNESS LOGO SPECIFICATIONS

(Eligible only on LiteFit and BaseWear Harness Styles)
1.5" High x 4.5" Wide
Two colors maximum
On Harness Back Strap

LOGO MINIMUM ORDER REQUIREMENTS: Minimum 25 piece opening order required for logoed kits. Minimum 10 pieces required for reorders.

URMARK KITS

These all-in-one kits cover a broad range of applications and take protection and productivity to the next level. Every job is different, as is the fall protection required to get the job done. Werner is committed to providing the right product solution for your needs.

KI21013

Aerial Kit with BaseWear Std Harness, Pass Through Legs 6ft DeCoil Lanyard



HARNESS
H411002

LANYARD
C311100

KI22023

Aerial Kit with BaseWear Std Harness, Tongue Buckle Legs 6ft SoftCoil Lanyard



HARNESS
H412002

LANYARD
C351100

AERIAL KIT TOOLBAG	HARNESS	LANYARD CONNECTOR	LEG STRAPS
K121013	H411002 Standard BaseWear	C311100 6' DeCoil	Pass Through
K122023	H412002 Standard BaseWear	C351100 6' SoftCoil	Tongue Buckle
K123033	H211002 Blue Armor 1000	C341100 6' DeCoil Stretch	Pass Through
K121043	H411002 Standard BaseWear	C411100 6' DeCoil Dual Leg	Pass Through
K121053	H411002 Standard BaseWear	C311101 6' DeCoil Tie-Back	Pass Through
H411002XC311100 COMBO	H411002 Standard BaseWear	C311100 6' DeCoil Attached	Pass Through
H411002XC311104 COMBO	H411002 Standard BaseWear	C311104 3' DeCoil Attached	Pass Through
H431002XC311100 COMBO	H431002 Positioning BaseWear	C311100 6' DeCoil Attached	Pass Through

AERIAL CARRY CASES

KI20000
SMALL TOOL BAG
12" X 18"



KI20001
LARGE TOOL BAG
24" X 16"



KI20002
MEDIUM SIZE BACK PACK



SAFETY ABOVE ALL.™

COMPLIANCE KITS

Roofing Kit



BASEWEAR HARNESS



REUSABLE STEEL ROOF ANCHOR



ROPE ADJUSTER WITH 3' SHOCK ABSORBING LANYARD



POLY BLEND ROPE LIFELINE

BUCKET KIT	DESCRIPTION	HARNESS	LANYARD CONNECTOR	LIFELINE	ANCHOR
K111101	Roofing/30'	H411002 BaseWear Pass Through Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201030 30' Polyblend Rope	A210400 Reusable Steel
K111201	Roofing/50'	H411002 BaseWear Pass Through Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201050 50' Polyblend Rope	A210400 Reusable Steel
K111101XP	Roofing/30' (48 Count)	H411002 BaseWear Pass Through Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201030 30' Polyblend Rope	A210400 Reusable Steel
K112201XP	Roofing/50' (48 Count)	H412002 BaseWear Tongue Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201050 50' Polyblend Rope	A210400 Reusable Steel
K112101	Roofing/30'	H412002 BaseWear Tongue Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201030 30' Polyblend Rope	A210400 Reusable Steel
K112201	Roofing/50'	H412002 BaseWear Tongue Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201050 50' Polyblend Rope	A210400 Reusable Steel
K111204	Roofing Tool Bag/50'	H411002 BaseWear Pass Through Buckle Leg Straps	L210101 Rope Adjuster 3' Shock Absorbing	L201050 50' Polyblend Rope	A210400 Reusable Steel

Construction/Maintenance Kit



BASEWEAR HARNESS



SOFTCOIL 6' LANYARD WITH SNAPHOOK



WEB 6' CROSS ARM STRAP

BUCKET KIT	DESCRIPTION	HARNESS	LANYARD CONNECTOR	ANCHOR
K121001	Construction/Maintenance	H411002 BaseWear Pass Through Buckle Leg Straps	C351100 6' SoftCoil	A111106 Web 6' Cross Arm Strap
K122001	Construction/Maintenance	H412002 BaseWear Tongue Buckle Leg Straps	C351100 6' SoftCoil	A111106 Web 6' Cross Arm Strap

TRIPOD COMPONENTS

T100009

7' Aluminum Tripod

- Integrated Pulley and Accessory option
- Easy set up and tear down
- Lightweight and portable



T210060

60' 3-Way SRL



T210060B

60' 3-Way SRL Bracket




T510045

60' Material Hoist



T510000B

Material Hoist Bracket

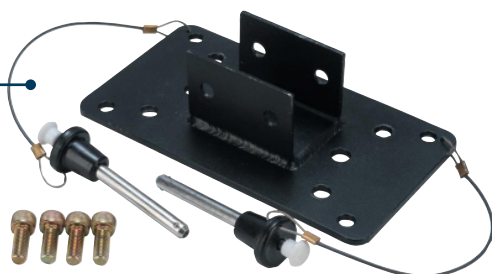

MODEL	DESCRIPTION
T210060B	60' 3-Way SRL Bracket
T210060	60' 3-Way SRL
T210100B	100' 3-Way SRL Bracket
T210100	100' 3-Way SRL
T510045	60' Material Hoist
T510000B	Material Hoist Bracket
T100009	7' Aluminum Tripod
T200001	Tripod Pulley

CUSTOM SYSTEMS

3-WAY SRL SYSTEM


MODEL	DESCRIPTION
T100009	7' Aluminum Tripod
T210060/T210060B	60' 3-Way SRL/Bracket
T200001	Tripod Pulley
A100301	Carabiner

HOIST SYSTEM

MODEL	DESCRIPTION
T100009	7' Aluminum Tripod
T510045	60' Material Hoist
T510000B	Material Hoist Bracket


3-WAY SRL/MATERIAL HOIST SYSTEM

MODEL	DESCRIPTION
T100009	7' Aluminum Tripod
T210060/T210060B	60' 3-Way SRL/Bracket
T510045	60' Material Hoist
T510000B	Material Hoist Bracket
T200001	Tripod Pulley
A100301	Carabiner

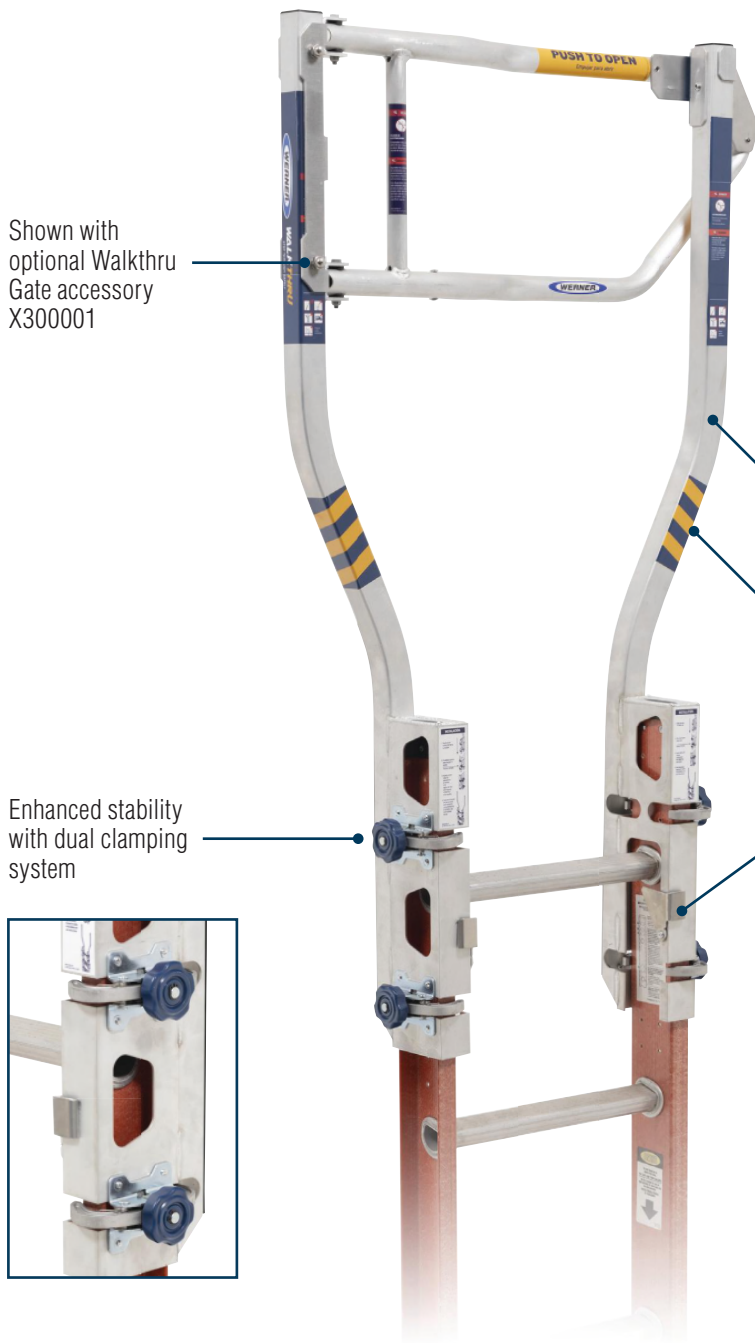

Shown with optional Walkthru Gate accessory X300001

Enhanced stability with dual clamping system

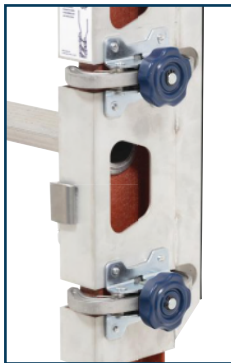

- Provides ergonomic transition area from ladder to roof, eliminating the need to step around the ladder
- Wide base provides additional contact area on the worksurface making a safer transition to and from the access point
- Spring closed gate accessory also available
- Easy to install and uninstall

Brace arms are designed for optimal descending and handles positioned for best ergonomics

Violator markings for visibility

Latch spring mechanism fits securely in place

LADDER*	DUTY RATING	
Type IAA	Special Duty	375 lbs
Type IA	Extra Heavy Duty	300 lbs
Type I	Heavy Duty	250 lbs
Type II	Standard	225 lbs

Meets Compliance Standards
OSHA 1910 & 1926




MODEL #	ITEM NAME	SHIPPING HEIGHT	SHIPPING LENGTH	SHIPPING WIDTH	SHIPPING WEIGHT	PRODUCT WEIGHT
X300000	Extension Ladder WalkThru	7.1 in	51 in	9.75 in	11 lbs	10.5 lbs
X300001	Extension Ladder WalkThru Gate	3.75 in	30.7 in	14.17 in	4 lbs	4 lbs

*Not compatible with 7800, 500-1,500-3,7100-1(manhole ladders only),9500-1,9500-2, D1300-2 & D1800-2EQ series ladders.

RESCUE LADDER KIT

The Rescue Ladder System is designed for rescuing a worker in the event of a fall with minimal work force training by allowing the victim to quickly and efficiently climb to safety with the additional support from a patent pending belay system.

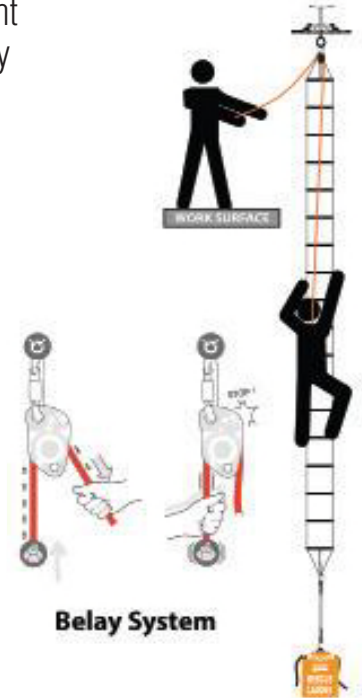

Rescue Ladder

- 18' length 2" Nylon Web
- Aluminum Rungs
- 11 mm Nylon Rope
- Progress Capture Pulley
- 1,600 lb Gate Carabiner

T340018



18' web ladder with belay assist



Portable and quick set up



Convenient ballistic nylon carry bag

TRAUMA STRAPS

The T320000 Suspension Trauma Relief Strap is designed to be used with a full body harness and helps relieve the discomfort of prolonged suspension after a fall arrest. The two piece design provides for quick and easy adjustment to fit users of all sizes, and is transferable from one harness to the next.



Suspension Trauma Relief Strap

- Attaches to any harness
- Two piece zipper case design
- Quick and easy length adjustment
- Transferable from one harness to another

T320000




LEVEL 1: Self-Study Safety eLearning

Who can attend: Anyone

Website – www.Wernerco.com

Support tab → Training → Scroll Down to Fall Protection

- 1) Safety Videos
 - a. Walk It Down
 - b. Harness Inspections
- 2) Fall Protection Core Training (60 min) → Earn your Certificate

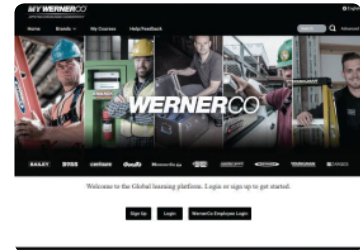

LEVEL 2: Virtual Safety Training (20–30 Minutes)

Who can attend: Anyone

LIVE product WALK IT DOWN and CHAIR IN THE AIR™ demonstration with the WernerCo Fall Protection Team!

LEVEL 3: On-Site Safety Training (30 min-3 hours)

Who can attend: All Employees

- A WernerCo Fall Protection Expert will do an in-person training at your facility on the A (Anchors) B (Body Harness) C (Connectors) D (Decent & Rescue) & E (Education) of Fall Protection
- A virtual meeting or phone call prior to the training is required to get to know your company processes and to and to also understand your training needs

LEVEL 4: On-Site Authorized User (Approximately 8 hours - 1 Day)

Who can attend: This class is designed for users at height who are required to have knowledge of safe use of Fall Protection

- Identify proper equipment and system selection
- Hands on exercises
- Wallet card certificate of completion

LEVEL 5: On-Site Competent Person Training (Approximately 16 hours - 2 Days)

Who can attend: Foreman and above (Safety Directors/Managers, Superintendents, Project Managers)

- Regulations relating to all fall protection topics
- Fall Hazard survey and fall protection procedures
- Detailed hands on inspections to determine when a system is determined unsafe
- Rescue
- Lecture and additional hands on exercises
- Certificate of completion

Set Up Your Safety Training



Email: EndUserSpecialist@wernerco.com

In your email, indicate your location and desired training courses. We will respond to set up a day and time.

Standard Features



Recessed Handles




WATCHMAN® IV Lock System with 3-point latching



Convenient foot latch



Heavy-duty 16-gauge steel construction



Caster-ready 4-way skids



Emergency Storage

*First aid kit, fire extinguisher and personal eye wash not included.

Optional Accessories



Casters

MODEL 139-SK

SAFETY KAGE™

Capacity: **59.4 Cu. Ft.**
Ship Wt: **421 lbs.**

- 16g Diamond Punched steel panels
- Secure Fall Protection Storage
- First Aid Kit and Fire Extinguisher Storage



MODEL 139-SK-01

SAFETY KAGE™

Capacity: **59.4 Cu. Ft.**
Ship Wt: **483 lbs.**

- Heavu-duty 16g steel construction with fully arc-welded seams
- 16g Solid Steel panels allow for protection from harsh weather, yet provide ventilation
- Crane liftable, includes Knaack 497 crane lift kit for added mobility around jobsite



*Shown with optional casters

Uses Accessory Tray Model 21

MODEL 139-SK-02

SAFETY KAGE™

Capacity: **59.4 Cu. Ft.**
Ship Wt: **415 lbs.**

- Ventilated doors with integrated hooks
- 32 storage hooks under shelf



MODEL 139-SK-03

SAFETY KAGE™

Capacity: **59.4 Cu. Ft.**
Ship Wt: **383 lbs.**


- Comes standard with ventilated doors
- Interchangeable doors for customization of cabinet



Available door options:

- SKV-01L – Ventilated Door, Left
- SKV-01R – Ventilated Door, Right
- SKS-01L – Solid Panel Door, Left
- SKS-01R – Solid Panel Door, Right
- SKC-01L – Safety Gear Compartment, Left
- SKC-01L – Safety Gear Compartment, Right

- 24 storage hooks under shelf
- Heavu-duty 3 point locking latch – flexibility for padlocks

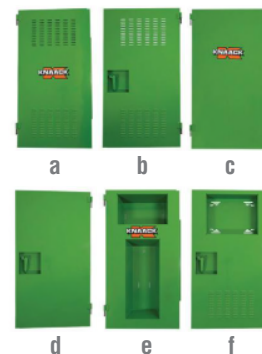



CORPORATE HEADQUARTERS

Werner Co.
555 Pierce Road
Suite 300
Itasca, IL 60143
Tel: 888 523 3371

To contact us please visit:
wernerco.com