

**BASHLIN
INDUSTRIES**
GROVE CITY, PENNSYLVANIA
UP / DOWN / ALL-AROUND QUALITY

IMPORTANT CUSTOMER INFORMATION

Bashlin has supplied quality equipment to Linemen since 1926. You may be able to find products for less, but you will not buy any other Lineman's Equipment that works or wears better than Bashlin's right priced quality products produced in our manufacturing facilities in Grove City, Pennsylvania.

Linework is dangerous. Properly using these products and appropriate training are keys to your safety. To aid in product understanding, as well as proper use of these items, the following information boxes and product application symbols are located with the product write-ups. Please read and understand this information, as well as the material included with and attached to product BEFORE using these items. If there are questions, please contact us via the various methods listed at the bottom of the page.



FALL ARREST

More than 2', but not more than 6' free fall. (Full body harness)



POSITIONING

Maximum 2' free fall. (Positioning belts, Line belts)



RETRIEVAL

For rescue from enclosed confined spaces. (Full body harness)



NOT A SAFETY BELT

Not to be considered personal protective equipment.

MANUFACTURER'S WARRANTY

The Manufacturer warrants equipment manufactured by it to be free from defects in material and workmanship under normal use and service, its obligation under this warranty being limited to replacing at its factory any part or parts which shall, within 30 days after delivery of such equipment to the original purchaser, be returned to it and which its examination shall disclose to its satisfaction to have been thus defective; this warranty being expressly in lieu of all other warranties, expressed or implied, and all other obligations or liabilities on its part.

THE INFORMATION IN THIS CATALOG IS TO THE BEST OF OUR KNOWLEDGE CORRECT AT THE TIME OF PRINTING. WE RESERVE THE RIGHT TO MAKE IMPROVEMENTS AND CHANGES AS NECESSARY TO OUR PRODUCTS WITHOUT NOTICE.

WARRANTED AND ALL OTHER REPAIR WORK MUST BE DONE BY BASHLIN FACTORY PERSONNEL USING BASHLIN COMPONENTS.

TERMS AND CONDITIONS

Pricing - Prices are subject to change without notice. The cost of Bashlin products is as low as is consistent with quality merchandise. We encourage comparison.

Payment - Open account terms are available once credit has been established. Bashlin accepts all major credit cards and cash advance orders. On cash advance orders, overpayment of less than \$2.00 cannot be refunded.

Shipping - All freight terms are F.O.B. shipping point unless otherwise stated.

Contested Shipments - Any shipping or handling claims must be reported within 14 days of shipment. Claims not reported in this time period will not be allowed.

Returned Goods - Returns must be authorized prior to shipment to our warehouse. There is a handling charge on all returned goods.



119 West Pine Street, P.O. Box 867 Grove City, PA 16127
Phone: 724.458.8340 Fax: 724.458.8342 bashlin@bashlin.com





BASHLIN'S FALL PROTECTION AND CLIMBING EQUIPMENT REGULATIONS AND REQUIREMENTS

The equipment used by linemen, cablemen, arborists, and tower workers is manufactured in accordance with consensus standards as well as regulations developed by federal or state authorities. These regulations are important for you because they provide guidelines not only for the users, but also the manufacturers and your employer.

Consensus standards are voluntarily developed. They are approved by the users and manufacturers of the products. The standards are administered by such bodies as the American National Standards Institute, (ANSI) and the American Society of Testing and Materials (ASTM). Following are some consensus standards that apply to these products:

ANSI STANDARDS

- ANSI/ASSP Z359.1 The fall protection code 
- ANSI Z1331.1 Safety requirements for arboricultural operations.
- ANSI A10.32 Standard for fall protection system used in construction and demolition. 


ASTM STANDARD

- F887 Standard specifications for personal climbing equipment and harnesses.

OSHA STANDARDS FOR GENERAL INDUSTRY

Government groups also write laws that they refer to as standards regarding such things as the use of these products. Many times, sections are based on the consensus standards. The difference is that they are mandatory.

Following are some standards that may apply to the users of these products.


- 1910.269 Electric power, generation, transmission and distribution.
- 1910.268 Telecommunications. 
- 1910.67 Vehicle mounted elevating and rotating platforms.
- 1910.140 Personal fall protection systems.

OSHA STANDARDS FOR CONSTRUCTION

- 1926 Subpart M Fall protection.
- 1926.500 to 1926.503
- 1926.954 Personal protective equipment.

For more information, contact your corporate safety professional, supervisor, local OSHA office or insurance carrier.

To the best of our knowledge, Bashlin equipment meets or exceeds all applicable standards or laws at the time of manufacture.

Bashlin Industries Inc. utilizes Underwriters Laboratories  for independent 3rd party certification on many products. Look for the  symbol. Certificates of compliance available on request and on our website.



WARNING: Important information is included with each product. It must be read and understood prior to use. If none is included with your product, or if there are any questions, contact us immediately. Failure to understand the information, or be properly trained prior to using the product may cause accidents, injury, or death.

Linemen's
Climbing
Equipment

5

Fall Protection
and Rescue Equipment
for Lineworkers
and General Industry

33

Bags, Buckets
and Tool Carriers

57

Line Vehicle Equipment
and Construction Tools

69

Electrical Personal
Protective Equipment

79

Gloves, PPE, Books
and Training

89



LINEMEN'S CLIMBING EQUIPMENT

Bashlin Industries, Inc. manufactures quality tool belts, pole straps, and climbers for the professional lineworker. These products are designed for comfort and durability. We offer a complete assortment of climbing products for workers ranging from apprentice to journeyman.

Climbing is serious business. We recommend that you properly care for this equipment; your personal safety depends on it. Learn how to properly use, inspect and maintain your tools. Guidelines appear in this catalog; more detailed information is included with Bashlin products. Remember, when in doubt, DON'T.

SIZING TOOL BELTS

Bashlin belts are sized using the measurement between the 2 D-Rings on the main portion of the belt (A).



2 D-Ring and 4 D-Ring belts are sized identically.

Measure for summer clothing. If the belt is the correct size, there will be ample adjustment for the relatively limited time it will be used in the colder weather.

If a belt is sized correctly, the hip D-Rings will point straight ahead, and the tongue adjustment will be in the center hole (B).



CORRECTLY SIZED TOOL BELT

USE BASHLIN'S LINEMAN'S SIZING BELT (LSB) (E)

Estimate the correct size of your belt and adjust the LSB to the size you believe your belt should be.




Place the LSB on your hips at the location where your tool belt is worn (F).

By trial and error, change the length of the LSB until the belt is the correct length, and note the adjusted size of the belt (G).



TO FIND YOUR D-RING SIZE USING A TAPE MEASURE

1. Locate the point where the heel of the hip D-Ring should rest (C).
2. Begin to measure from this point. Measure with a seamstress tape around the buttocks to the same point on the opposite side (D).

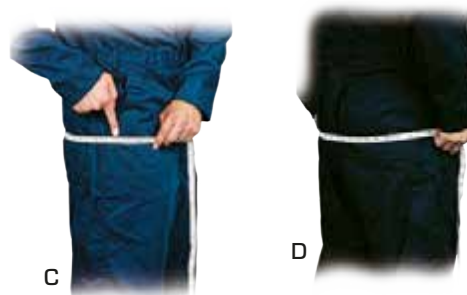

USING A TAPE MEASURE

BELT ADJUSTMENT IN INCHES - PER ASTM F887

D Size - In.	Minimum	Center Hole	Maximum	Tool Loops
D18	32	36	40	3
D19	33	37	41	3
D20	34	38	42	3
D21	36	40	44	4
D22	37	41	45	4
D23	38	42	46	4
D24	40	44	48	4
D25	41	45	49	4
D26	42	46	50	4
D27	44	48	52	4
D28	45	49	53	4

HIP-GRIP SIZING CHART

Upper Tongue Adj.		Upper Tongue Adj.		Upper Tongue Adj.	
D18	33"-39"	D23 or 24	39"-45"	D27 or 28	43"-49"
D19 or 20	35"-41"	D25 or 26	41"-47"	D29 or 30	45"-51"
D21 or 22	37"-43"				

REST-A-BACK SIZING CHART

Upper Tongue Adj.		Upper Tongue Adj.		Upper Tongue Adj.	
D18	29"-36"	D23	34"-41"	D27	38"-45"
D19	30"-37"	D24	35"-42"	D28	39"-46"
D20	31"-38"	D25	36"-43"	D29	40"-47"
D21	32"-39"	D26	37"-44"	D30	41"-48"
D22	33"-40"				

FEATURES OF BASHLIN BELTS

S-SHAPED D-RINGS:

This is Bashlin's original design. The toe lies away from the belt for easier snap engagement, while the curve reduces pressure on the hip for comfort.

ALL LEATHER CUSHION SECTION:

The glove soft, rolled edge cushion provides for a belt which is cooler in the summer, yet flexible in cold weather.

TOP QUALITY MATERIAL:

We utilize the highest quality hardware, nylons, and leathers available.

BASHLIN CRAFTSMANSHIP:

Years of quality manufacturing are built into each product for a subtle, yet meaningful difference. We encourage side by side comparison.

BASHLIN TOOL BELT STYLES

4 D-RING TOOL BELTS:



88MX4D

STACKED 4 D-RING



884D

IN-LINE 4 D-RING



88BMX

HIP-GRIP/REST-A-BACK 4 D-RING



1515PX

STACKED FIXED 4 D-RING

2 D-RING TOOL BELTS:



1511N

STANDARD - FIXED 2 D-RING



88

SEMI-FLOATING - SHIFTING 2 D-RING

STANDARD EQUIPMENT ON BASHLIN BELTS INCLUDES:

4 D-Rings for gut strap attachment (exception - Hip-Grip and Rest-A-Back belts), tape sling, knife snap, glove bag ring and 2 hammer loops and 4 tool loops.

NOTE: D18, D19, and D20 tool belts have 3 tool loops due to the shorter belt section.

Bashlin 4 D-Ring Body Belts are patented under PAT 9.737.737 and 10.099.073

MADE TO ORDER BELTS

All "Made to Order" belts are manufactured outside of standard production. Once the order is placed, it cannot be cancelled. Please allow additional shipping time for all made to order belts.

STOCK AND SPECIAL BELTS

Bashlin offers right handed belts, in sizes D18 to D28 of the most popular belts. Belt sizes may vary on different style belts. Larger belts, up to D32, may be ordered. There is an additional cost for sizes D29 to D32.

Belts and holsters with left hand design are available at no additional cost. Add "LH" to the part number.

4 D-RING TOOL BELTS



88UX4DMP

EZRIDER

- Like working in a "Rocking Chair".
- Saddle design relieves hip and leg pressure.
- Worn slightly higher than a standard tool belt.
- Semi-Float with shifting upper D-Rings fixed lower D-Rings.

No. 88UX4DMP Nylon mesh cushion Wt. 6.5 lb.
No. 88UX4DCC Leather comfort cushion Wt. 7.0 lb.



1515PX4D

EZRIDER LITE

- Our lightest 4 D-Ring belt.
- Nylon or leather cushion.
- Fixed 4 D-Ring.

No. 1515PX4D Nylon cushion Wt. 4.6 lb.
No. 1515PX4DCC leather comfort cushion Wt. 4.8 lb.
No. 1515PX Nylon cushion with two steel upper D-Rings and nylon loop lower Wt. 4.5 lb.



WARNING: Never carry wire, tools, or anything other than the "positioning" strap in the D-Rings of a tool belt. Foreign objects carried in the D-Rings may cause the snap to malfunction and accidental disengagement to occur.



Labrador

- 7" wide for support.
- Made in nylon mesh or soft leather cushion.
- 3 different design choices for different needs.
- Semi-Float with shifting lower D-Rings and fixed upper D-Rings.



Q88GX4DMP

LABRADOR "AMIGO"

- Easy donning quick release buckle upper.
- Tongue and buckle lower.
- Easy to adjust nylon webbing.

No. Q88GX4DMP Nylon mesh cushion Wt. 5.5 lb.
No. Q88GX4DCC Leather comfort cushion Wt. 6.0 lb.



88GX4DCC

LABRADOR "YUKON"

- Dependable double tongue design.
- Leather faced nylon billet.

No. 88GX4DMP Nylon mesh cushion Wt. 6.0 lb.
No. 88GX4DCC Leather comfort cushion Wt. 6.5 lb.



88MX4DMP

LABRADOR "LIBERTY"

- The freedom of a single tongue.
- Durable 7" back.

No. 88MX4DMP Nylon mesh cushion Wt. 5.0 lb.
No. 88MX4DCC Leather comfort cushion Wt. 5.5 lb.

4 D-RING TOOL BELTS



88BMX4DCC

BMX SERIES



- Modeled after Bashlin's Rest-A-Back and Hip Grip, this proven design offers excellent support.
- Double tongue and buckle design.
- Semi-Float with shifting lower D-Rings and fixed upper D-Rings.

No. 88BMX4DMP	Nylon mesh cushion	Wt. 7.0 lb.
No. 88BMX4DCC	Leather comfort cushion	Wt. 7.0 lb.
No. 88BMX4D	Durable leather back	Wt. 7.0 lb.



Q88BMX4DCC

BMX QR SERIES



- Modeled after Bashlin's Rest-A-Back and Hip Grip, this proven design offers excellent support.
- Quick release buckles upper tongue.
- Semi-Float with shifting lower D-Rings and fixed upper D-Rings.

No. Q88BMX4DMP	Nylon mesh cushion	Wt. 7.0 lb.
No. Q88BMX4DCC	Leather comfort cushion	Wt. 7.0 lb.
No. Q88BMX4D	Durable leather back	Wt. 7.0 lb.



88X4D

FLORIDIAN 4D IN-LINE



- 4 D-Ring version to our traditional 88 Floridian belt.
- Semi-Float design and four shifting D-Rings.
- Leather Comfort Cushion.

No. 884D	Floridian 4D - brown	Wt. 6.5 lb.
No. 88X4D	Floridian 4D - black	Wt. 6.5 lb.



88BSX4DCC

REST-A-BACK 4D



- Semi-Float with shifting lower D-Rings with fixed upper D-Rings.

No. 88BSX4DCC	Leather comfort cushion	Wt. 9.0 lb.
----------------------	-------------------------	-------------

*See page 6 for sizing.



88BIX4DCC

HIP GRIP 4D



- Pliable and removable 1 3/4" upper tongue.
- Contour back for additional comfort.
- Semi-Float with shifting in-line D-Rings.

No. 88BIX4DCC	Hip Grip 4D Leather comfort cushion	Wt.. 9.0 lb.
----------------------	--	--------------

*See page 6 for sizing.



WARNING: All Bashlin's tool belts are to be worn snug as possible with the large D-Rings and billet on or above the hips. Wearing the belts improperly may cause accidents or death.

2 D-RING TOOL BELTS



88

FLORIDIAN



- The industry standard for over 50 years.
- The original laced belt.
- Flared cushion for easier climbing.
- Semi-Floating with shifting D-Rings.

No. 88 Leather comfort cushion Wt: 6.5 lb.
No. 88X Black - leather comfort cushion Wt: 6.5 lb.



1511N

WRANGLER



- Fixed D-Rings and shifting billet.
- Neoprene nylon back and tongue.
- Lightweight.

No. 1511N Tool belt Wt: 5.25 lb.



160N

NYLON DELUXE



- Semi-Floating with shifting D-Rings.
- Light and durable nylon back.
- Comfortable leather cushion.
- Tongue and buckle is 6 ply nylon.
- Leather tool loops.

No. 160N Leather comfort cushion Wt: 6.0 lb.



656PX

656 SERIES



- Fixed D-Ring style.
- Lightweight and versatile.
- Moisture wicking mesh pad.

No. 656PX Black Wt: 4.0 lb.
No. 656CM Brown Wt: 4.0 lb.



WARNING: Never carry wire, tools, or anything other than the "positioning" strap in the D-Rings of a tool belt. Foreign objects carried in the D-Rings may cause the snap to malfunction and accidental disengagement to occur.

AUXILIARY POSITIONING AND SUPPORT BELTS



LABRADOR APB



- Easily convert your comfortable 2 D-Ring belt to a 4 D-Ring design.
- Quick release attachment straps.
- Fixed D-Rings for easy secondary lanyard connections.
- FR Arc resistant nylon fabric.

No. Q83H2D Labrador "Tucson"; quick release belt Wt. 3.0 lb.
No. 83H2D Labrador "Sierra"; billet style belt Wt. 3.2 lb.



LABRADOR "LOBO"



- Orthopedically correct Back-A-Line support belt.
- Fixed D-Rings for easy secondary lanyard connections.

No. 83BDH Back-A-Line belt Wt. 3.4 lb.

SIZING: Add 4"-6" to the waist measurement
 Small 32"-40" Medium 36"-44" Large 40"-48" X-Large 42"-50"



WARNING: Bashlin's Lineman's Belt Supporters are never to be used with a Lineman's belt to create a "saddle". The lineman's belt always must be worn snugly, on or above the hips. Incorrect use may cause accidents or death.



NOT A SAFETY BELT



NYLON WEB SUSPENDERS



- Nylon web suspenders.
- Fully adjustable design (one size fits most).
- Tool belt not included*.

No. 80HDS Nylon web suspenders Wt. 2.75 lb.



BELT SUPPORTER STRAP



- Distributes weight of belt and tools.
- Made from top quality russet leather.
- Four adjustable drop straps.

No. 81 Supporter strap Wt. 1.5 lb.
No. 81-1 Leather drop strap only Wt. 0.25 lb.



SAM BROWN SUSPENDERS



- Leather suspenders.

No. 80 Brown Wt. 1.25 lb.
No. 80X Black Wt. 1.25 lb.

BOLT AND NUT BAGS

25A

8 1/2" x 9" x 4" bolt and nut bag with a reinforced top to stay open.

- No corners to lose hardware.
- Features an inside pocket.
- Secures to a belt with two straps joined by snaps and D-Rings.
- Available in traditional canvas, black ballistic nylon, orange nylon, and camo nylon.



No. 25A Canvas bag with straps Wt: 0.7 lb.



No. 25ABX Black ballistic nylon bag with straps Wt: 0.7 lb.



No. 25A-0 Orange nylon bag with straps Wt: 0.7 lb.



No. 25A-C Camo nylon bag with straps Wt: 0.7 lb.

25AM2 WITH MAGNET

Similar to the popular 25A with the addition of 3 inner tool loops, inside pocket and a strong magnet to hold onto hardware such as nuts and cotter keys.



No. 25AM2 Canvas bag with magnet Wt: 1.0 lb.



No. 25AM2BX Black ballistic nylon bag with magnet Wt: 1.0 lb.



No. 25AM2-0 Orange nylon bag with magnet Wt: 1.0 lb.



No. 25AM2-C Camo nylon bag with magnet Wt: 1.0 lb.

BOLT AND NUT BAGS



26DRM

- All leather pouch with tool holders inside.

No. 26DRM 9" x 9" x 2 1/2"

Wt: 0.5 lb.



25BS

- Canvas with snap or thong attachment.

No. 25BS 8" x 9" x 2 1/2"

Wt: 0.5 lb.



25PLS

- An all leather bag with reinforced top.
- Snap or leather thong attachment.

No. 25PLS 8" x 9" x 3"

Wt: 0.9 lb.



25KLBS

- Durable leather with snap or thong attachment.

No. 25KLBS 8" x 9" x 2 1/2"

Wt: 0.8 lb.



25PS

- Wide opening canvas bag with leather bottom and snap attachment.

No. 25PS 8" x 8" x 2 1/2"

Wt: 0.6 lb.



26L

26LX

26L

- Very heavy, durable leather.
- Features a double top to stay open.
- Leather thong attachment.

No. 26L 9" x 9" x 2 1/2"

Wt: 0.7 lb.

No. 26LX 9" x 9" x 2 1/2"

Wt: 0.7 lb.



25R

- Cotton duck bag with 1" straps and leather ties.
- Reinforced top to keep open.

No. 25R 8" x 8 1/2" x 4"

Wt: 0.5 lb.



26G

- A soft leather bag with snap closure and leather thongs.

No. 26G 8 1/2" x 9"

Wt: 0.5 lb.

LINEMEN'S HOLSTERS

Bashlin manufactures only premium holsters for tool belts. They feature double harness leather backs reinforced for extra wear. All holsters come with the hardware necessary for proper attachment.



111HS



111HSX

3 POCKET HOLSTER

- No. 111HS** For pliers, rule, screwdriver, and knife or wrench Wt: 1.0 lb.
- No. 111HSX** For pliers, rule, screwdriver, and knife or wrench - black Wt: 1.0 lb.



111HLS



111HLSX

4 POCKET HOLSTER

- No. 111HLS** For pliers, rule, screwdriver, Channellock®, and knife or wrench Wt: 1.25 lb.
- No. 111HLSX** For pliers, rule, screwdriver, Channellock®, and knife or wrench - black Wt: 1.25 lb.



111HLDS



111HLDSX

5 POCKET HOLSTER

- No. 111HLDS** For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife or wrench Wt: 1.5 lb.
- No. 111HLDSX** For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife or wrench - black Wt: 1.5 lb.



111HE



111HEX

3 POCKET HOLSTER AND KNIFE SHEATH

- No. 111HE** For pliers, rule, screwdriver, and knife Wt: 1.25 lb.
- No. 111HEX** For pliers, rule, screwdriver, and knife - black Wt: 1.25 lb.



111HLE



111HLEX

4 POCKET HOLSTER AND KNIFE SHEATH

- No. 111HLE** For pliers, screwdriver, Channellock®, rule, and knife Wt: 1.5 lb.
- No. 111HLEX** For pliers, screwdriver, Channellock®, rule and knife - black Wt: 1.5 lb.



111HLDSE



111HLDSEX

5 POCKET HOLSTER AND KNIFE SHEATH

- No. 111HLDSE** For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife or wrench Wt: 1.75 lb.
- No. 111HLDSEX** For pliers, rule, screwdriver, Channellock®, ratchet driver, and knife or wrench - black Wt: 1.75 lb.

LINEMEN'S HOLSTERS



111SK



111SKX

SKINNING KNIFE HOLSTER

No. 111SK

Skinning knife holster

Wt: 0.75 lb.

No. 111SKX

Skinning knife holster - black

Wt: 0.75 lb.



4HP

BASHLIN HOLSTER PACK

- Contains two rivet type screws, one small D-Ring, and piece of leather (black or brown) to attach tool holster to belt.

4HP

Brown

Wt: 0.1 lb.

4HPX

Black

Wt: 0.1 lb.



111BWH



111BWHX

BELL WRENCH HOLDER

No. 111BWH

For bell wrenches

Wt: 0.6 lb.

No. 111BWHX

For bell wrenches - black

Wt: 0.6 lb.



4STR

4 SCREW TYPE RIVETS TO SECURE HOLSTER TO BELT

4STR

Screw type rivets

Wt: 0.05 lb.



111LWH



111LWHX

LOWELL WRENCH HOLDER

No. 111LWH

For the Lowell wrench

Wt: 0.6 lb.

No. 111LWHX

For the Lowell wrench - black

Wt: 0.6 lb.



Left handed holsters are available at no extra cost. (Add an "-LH" to the part number when ordering.)

GROUNDMAN HOLSTER ACCESSORIES - CARE



112HLS



112HLSX

GROUNDMEN'S HOLSTER

Bashlin's single backed groundmen's holster is slotted for easy attachment. It features the same pliable pockets used on our linemen's holsters. Do not use these holsters on linemen's tool belts.

- No. 112HLS** For pliers, rule, screwdriver, knife, Channellock® or wrench Wt: 1.0 lb.
- No. 112HLSX** For pliers, rule, screwdriver, knife, Channellock® or wrench - black Wt: 1.0 lb.



WARNING: Do not use groundmen's or electrician's holsters on linemen's tool belts.



33




33L

HANDLINE CARRIER

The nylon handline carrier fits over the tongue-buckle section of the belt. It is designed to straighten and drop the rope if the handline becomes snagged. The 33L locks on the belt.

- No. 33** Handline carrier Wt: 0.1 lb.
- No. 33L** Handline carrier with lock Wt: 0.1 lb.

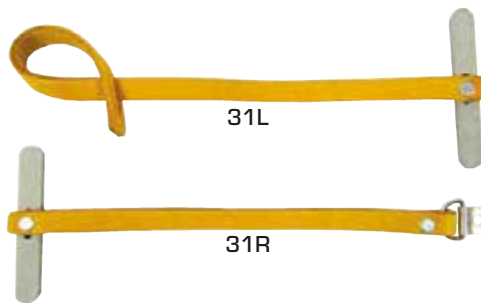

31L

31R

TAPE SLINGS

These swivel bar tape slings will fit any size tape roll. For black - add "X" to part number.

- No. 31L** Loop type Wt: 0.1 lb.
- No. 31R** Rivet type Wt: 0.1 lb.



32A

32AR

32B

32BR

LOOP-N-SNAP

These convenient extra snaps will fit 2" belts. For black - add "X" to part number.

- No. 32A** Small snap for knives Wt: 0.2 lb.
- No. 32AR** Small snap with screw rivets Wt: 0.2 lb.
- No. 32B** Large snap for wrenches Wt: 0.3 lb.
- No. 32BR** Large snap with screw rivets Wt: 0.3 lb.

806-32

806-16

806-8



804

809

LEATHER MAINTENANCE PRODUCTS

Long life for your leather products begins with proper care. Use Saddle Soap to clean the dirt out of the leather, then coat the leather to protect them with "Neatsfoot" or Mink Oil.

- No. 804** Saddle Soap Wt: .75 lb.
- No. 806-8** Neatsfoot Oil (8 oz.) Wt: .50 lb.
- No. 806-16** Neatsfoot Oil (16 oz.) Wt: 1.0 lb.
- No. 806-32** Neatsfoot Oil (32 oz.) Wt: 2.0 lb.
- No. 809** Mink Oil Wt: .30 lb.



ALUMINUM CLIMBERS **RETOOLED**

- ◆ **NEW, INNOVATIVE PROFILE FOR ENHANCED DURABILITY**
- ◆ *SAME TRIED AND TRUE CLIMBING FEEL*
- ◆ **SAME PROVEN AND EFFECTIVE REPLACEABLE GAFF, GAFF ANGLE AND POSITION**



Natural Aluminum
BD14B



Black Anodized
BD14BX



OD Green Anodized
BD14BOD

Forged and Manufactured in USA
from 2014-T6 Aluminum Alloy
Offered in 3 High Quality Finishes

POLE CLIMBERS


BD14B ALUMINUM

- Lightweight aluminum climber.
- Features replaceable gaffs.
- Weighs the same as comparable titanium climbers.
- Offset design gives great climbing qualities.

No. BD14B-1N	Aluminum alloy with bottom straps	Wt: 3.5 lb.
No. BD14B-2N	Bottom straps and top straps	Wt: 4.75 lb.
No. BD14B-3N	Bottom straps, top straps and #110D pads	Wt: 5.25 lb.



Natural Aluminum
BD14B



Black Anodized
BD14BX



OD Green Anodized
BD14BOD

No. BD14B-4N	Bottom straps, top straps and #130D pads	Wt: 5.50 lb.
No. BD14B-5N	Bottom straps, top straps and #140DS pads	Wt: 5.75 lb.
No. BD14BP-1N	For CCA poles - polished gaffs	Wt: 3.5 lb.
No. BD14BA-1N	Longer top slide (18"-21")	Wt: 3.5 lb.

BD16B STEEL

- Durable steel alloy climber.
- Features replaceable gaffs.
- Extra ankle room for linemen who have trouble with rubbing in that area.
- Offset design gives great climbing qualities.

No. BD16B-1N	Steel alloy, straight shanks with bottom straps	Wt: 5.0 lb.
No. BD16B-2N	Bottom straps and top straps	Wt: 6.0 lb.
No. BD16B-3N	Bottom straps and #110D pads	Wt: 6.5 lb.
No. BD16B-4N	Bottom straps, top straps and #130D pads	Wt: 6.75 lb.




BD16B

No. BD16B-5N	Bottom straps, top straps and #140DS pads	Wt: 7.0 lb.
No. BD16BP-1N	For CCA poles - polished gaffs	Wt: 5.0 lb.
No. BD16BA-1N	Longer top slide (18"-21")	Wt: 5.0 lb.

BD16BC TWISTED SHANK STEEL

- Our most popular steel alloy climber.
- Features replaceable gaffs.
- Has a 3° twisted shank so the climber lays flat against the leg.
- Extra ankle room like the BD16B.

No. BD16BC-1N	Steel alloy, twisted shank with bottom straps	Wt: 5.0 lb.
No. BD16BC-2N	Bottom straps and top straps	Wt: 6.0 lb.
No. BD16BC-3N	Bottom straps, top straps and #110D pads	Wt: 6.5 lb.



BD16BC

No. BD16BC-4N	Bottom straps, top straps and #130D pads	Wt: 7.0 lb.
No. BD16BC-5N	Bottom straps, top straps and #140DS pads	Wt: 7.0 lb.
No. BD16BCP-1N	For CCA poles - polished gaffs	Wt: 5.0 lb.
No. BD16BCA-1N	Longer top slide (18"-21")	Wt: 5.0 lb.



All Bashlin Climbers feature Bashlin's superior performing 17° gaff. Gaff Guards and a Gaff Gauge are included with Bashlin Climbers. The standard top slide length has an adjustment of 15"-18". There are longer top slides available, with an adjustment of 18"-21" (A).

POLE CLIMBERS

BD12 STEEL

- Lightweight, steel alloy climber.
- Features riveted non-replaceable gaffs.
- Excellent climbing characteristics.
- Offset design places gaff in proper position for easier penetration.



BD12

No. BD12-1N	Steel alloy with bottom straps	Wt: 5.0 lb.	No. BD12-4N	Bottom straps, top straps and #130D pads	Wt: 6.25 lb.
No. BD12-2N	Bottom straps and top straps	Wt: 5.5 lb.	No. BD12-5N	Bottom straps, top straps and #140DS pads	Wt: 6.5 lb.
No. BD12-3N	Bottom straps, top straps and #110D pads	Wt: 6.0 lb.	No. BD12P-1N	For CCA poles - polished gaffs	Wt: 5.0 lb.
			No. BD12A-1N	Longer top slide (18"-21")	Wt: 5.0 lb.

BD12C TWISTED SHANK STEEL

- This steel alloy climber is an excellent value.
- Features a riveted non-replaceable gaff.
- Has a 3° twisted shank so the climbers lay flat against the leg.
- Offset design places gaff in proper position for easier penetration.



BD12C

No. BD12C-1N	Steel alloy, twisted shank with bottom straps	Wt: 5.0 lb.	No. BD12C-4N	Bottom straps, top straps and #130D pads	Wt: 6.25 lb.
No. BD12C-2N	Bottom straps and top straps	Wt: 5.5 lb.	No. BD12C-5N	Bottom straps, top straps and #140DS pads	Wt: 6.5 lb.
No. BD12C-3N	Bottom straps, top straps and #110D pads	Wt: 6.0 lb.	No. BD12CP-1N	For CCA poles - polished gaffs	Wt: 5.0 lb.
			No. BD12CA-1N	Longer top slide (18"-21")	Wt: 5.0 lb.

BD12L STEEL

- Steel alloy climber.
- Features a riveted non-replaceable gaff.
- Has a narrower stirrup, it measures 3 3/4", the standard measurement is 4 3/4".
- Offset design places gaff in proper position for easier penetration.



BD12L

No. BD12L-1N	Steel alloy, narrow stirrup with bottom straps	Wt: 5.0 lb.	No. BD12L-4N	Bottom straps, top straps and #130D pads	Wt: 6.25 lb.
No. BD12L-2N	Bottom straps and top straps	Wt: 5.5 lb.	No. BD12L-5N	Bottom straps, top straps and #140DS pads	Wt: 6.5 lb.
No. BD12L-3N	Bottom straps, top straps and #110D pads	Wt: 6.0 lb.	No. BD12LP-1N	For CCA poles - polished gaffs	Wt: 5.0 lb.
			No. BD12LA-1N	Longer top slide (18"-21")	Wt: 5.0 lb.



Bashlin tree climbers also available. Contact customer service for more information.

CLIMBER PADS



SPUR-STAY CLIMBER PADS

Developed by a local lineman over 50 years ago, Bashlin introduced the 105 series "Spur-Stay" climber pads with metal inserts for the lineman looking for comfort and shank control. Some of the original users were mocked for using these pads because comfort was not considered "manly". (This is when a climber pad was a single piece of leather measuring 3" x 3".)

The Spur-Stay design allows the climber to adjust the position of the shank, and eliminates "kick-back". It is available with straps or Hook-N-Loop closures.



145BCV



145AC



145BC

145ACV/145BCV/145FCV

This Hook-N-Loop cinch closure pad has deep padding, moisture wicking mesh, and an angled metal insert.

- | | | |
|-------------------|---|-------------|
| No. 145ACV | For BD16B series and BD12 series climbers | Wt. 4.1 lb. |
| No. 145BCV | For BD14 climbers | Wt. 4.1 lb. |
| No. 145FCV | For BD14B climbers | Wt. 4.1 lb. |

145AC/145BC/145FC

This Durable Leather "wide" climber pad has moisture wicking padding, metal insert and a pair of top climber straps.

**** 1 pair of straps is included with pads ****

- | | | |
|------------------|---|-------------|
| No. 145AC | For BD16B series and BD12 series climbers | Wt. 3.3 lb. |
| No. 145BC | For BD14 climbers | Wt. 3.3 lb. |
| No. 145FC | For BD14B climbers | Wt. 3.3 lb. |



145BCVW



105BC

145ACVW/145BCVW/145FCVW

This "wide" pad combines the Hook-N-Loop cinch closure pad combined with sturdy leathers, moisture wicking padding, and angled metal inserts to provide added comfort.

- | | | |
|--------------------|---|-------------|
| No. 145ACVW | For BD16B series and BD12 series climbers | Wt. 3.5 lb. |
| No. 145BCVW | For BD14 climbers | Wt. 3.5 lb. |
| No. 145FCVW | For BD14B climbers | Wt. 3.5 lb. |

105AC/105BC/105FC

This is the original Spur-Stay design. It is lightweight, yet provides comfort and total climber control.

- | | | |
|------------------|---|-------------|
| No. 105AC | For BD16B series and BD12 series climbers | Wt. 1.5 lb. |
| No. 105BC | For BD14 climbers | Wt. 1.5 lb. |
| No. 105FC | For BD14B climbers | Wt. 1.5 lb. |

i Replacement Irons add "R" to the above part numbers. Sold in pairs.

i For climber pads with "straight" metal inserts drop "C" from above part number.

CLIMBER PADS




150V

150V - HOOK-N-LOOP PADS

- Constructed from woven nylon with a soft padding sewn inside.
- Hook-N-Loop closure for extra security.
- Leather tunnel loop to keep the pad in place on the climber.
- Slight angle for an improved gaff position.

No. 150V Hook-N-Loop with "T" design Wt: 4.0 lb.

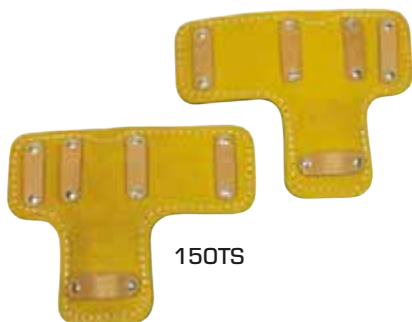

150TS

150T SERIES

- "T" pad constructed from durable latigo leather.
- Offers comfort and protection for the shin and calf.
- Leather lugs are securely riveted for long wear.
- Shank area is available with or without padding.

No. 150T Not padded Wt: .8 lb.
No. 150TS Padded Wt: .9 lb.



110D

110D SERIES

- Basic 2 ply universal fit leather pad that will protect the calf and shin.

No. 110D Not padded Wt: 0.6 lb.
No. 110DS Padded Wt: 0.7 lb.



130D

130D

- Bashlin's original "L" pad.
- Constructed from durable latigo leather.
- Light padding for comfort, while still keeping the pad lightweight.
- Allows shank movement for linemen that prefer less restriction.

No. 130D Padded Wt: 0.7 lb.



140DS

140D SERIES

- Constructed from durable latigo leather.
- Wing design holds the shank securely, and at a slight angle for enhanced control.
- Climber shank fits inside the pad, to add comfort while reducing movement.
- The shank area is available with or without padding.

No. 140D Not padded Wt: 0.8 lb.
No. 140DS Padded Wt: 1.25 lb.

CLIMBER PARTS AND ACCESSORIES



85N - 24"



86N - 28"



87N - 28"



89N - 28"

CLIMBER STRAPS

- Constructed from durable, pliable, and comfortable neoprene nylon (N) or flexible "Bioplastic" coated webbing (NP).
- Double riveted and feature a protective buckle shield.

No. 85N	1 1/16"x24"	
	top climber straps	Wt: 0.6 lb.
No. 85NP	1 1/16"x24"	
	top climber straps	Wt: 0.6 lb.
No. 86N	1 1/16"x28"	
	top climber straps	Wt: 0.6 lb.
No. 86NP	1 1/16"x28"	
	top climber straps	Wt: 0.6 lb.
No. 87N	1 1/16"x28" two piece	
	bottom straps	Wt: 0.7 lb.
No. 87NP	1 1/16"x28" two piece	
	bottom straps	Wt: 0.7 lb.
No. 89N	1 1/16"x28" two piece split ring	
	bottom straps	Wt: 0.7 lb.
No. 89NP	1 1/16"x28" two piece split ring	
	bottom straps	Wt: 0.7 lb.



14TS



14ATS



16TS



16ATS

TOP SLIDES (screws are included)

- Fits all Bashlin climbers.
- The standard adjustment is 15"-18".
- There are longer top slides available, with an adjustment of 18"-21".
- Order according to your climbers.

No. 14TS	For BD14, 15"-18" adjustment	Wt: 0.6 lb.
No. 14ATS	For BD14, 18"-21" adjustment	Wt: 0.85 lb.
No. 14TSB	For BD14B, 15"-21" adjustment	Wt: 0.6 lb.
No. 14ATSB	For BD14B, 18"-21" adjustment	Wt: 0.85 lb.
No. 16TS	For BD16B, BD12 series, 15"-18" adjustment	Wt: 0.6 lb.
No. 16ATS	For BD16B, BD12 series, 18"-21" adjustment	Wt: 0.85 lb.



3

CLIMBER STRAP SPLIT RING

No. 3	Split ring for climber straps (package of 2)	Wt: 0.15 lb.
--------------	--	--------------



4G



4T

SCREWS

- Screws are small and easy to lose.
- Bashlin offers replacement screws for gaffs and top slides.

No. 4G	Gaff screws	Wt: .05 lb.
No. 4T	Slide adjustor screws	Wt: .05 lb.

CLIMBER PARTS AND ACCESSORIES



14

14P

14T

REPLACEMENT GAFFS

- Fits the BD14, BD14B, BD16B, and BD16BC climbers.
- The standard 14 gaff is 1 5/8" long.
- The 14P gaff is 1 5/8" and had the machine marks removed for easier penetration on hard/CCA poles.
- The 14T gaff is 2 1/2" long to penetrate thick bark.

No. 14 1 5/8" pole gaffs with screws Wt: 0.5 lb.

No. 14P 1 5/8" polished pole gaffs with screws Wt: 0.5 lb.

No. 14T 2 1/2" tree gaffs with screws Wt: 0.6 lb.

***Only Bashlin Replacement Gaffs may be used on Bashlin Climbers.**



27

GAFF SHAPING KIT

- Nice compact design.
- Contains all of the tools needed to properly care for the gaffs on your Bashlin climbers.
- Includes #5 gaff gauge, 6" mill file with wooden handle, sharpening stone, and instructions.
- For use with Bashlin pole gaffs only.

No. 27 Gaff shaping kit Wt: 0.55 lb.



5

GAFF GAUGE

- For use with Bashlin pole climbers only.
- Used to maintain the correct shape, taper, and profile of your gaffs.
- Shaping instructions are included.

No. 5 Gaff gauge Wt: 0.2 lb.



2

2SC

B1972G

B1972F

GAFF GUARDS

- Helps keep the gaff protected.
- Helps to protect the user from scratches and puncture wounds.
- Sold in pairs.

No. 2 Standard leather guard with Hook-N-Loop Wt: 0.2 lb.

No. 2SC Deluxe leather guard with Hook-N-Loop attachment Wt: 0.25 lb.

No. B1972G Snap on guard for replaceable gaffs Wt: 0.2 lb.

No. B1972F Snap on guard for fixed gaffs Wt: 0.2 lb.




BHP

HEEL COVER

- Wearing a pair of climbers exposes the lineman's ankle and Achilles tendon to injury.
- Covers this vulnerable area, while not restricting any movement.
- They are light, durable, and easily attach to any standard climber.

No. BHP One size fits most, sold as pair Wt: .5 lb.

FALL RESTRICTING DEVICE

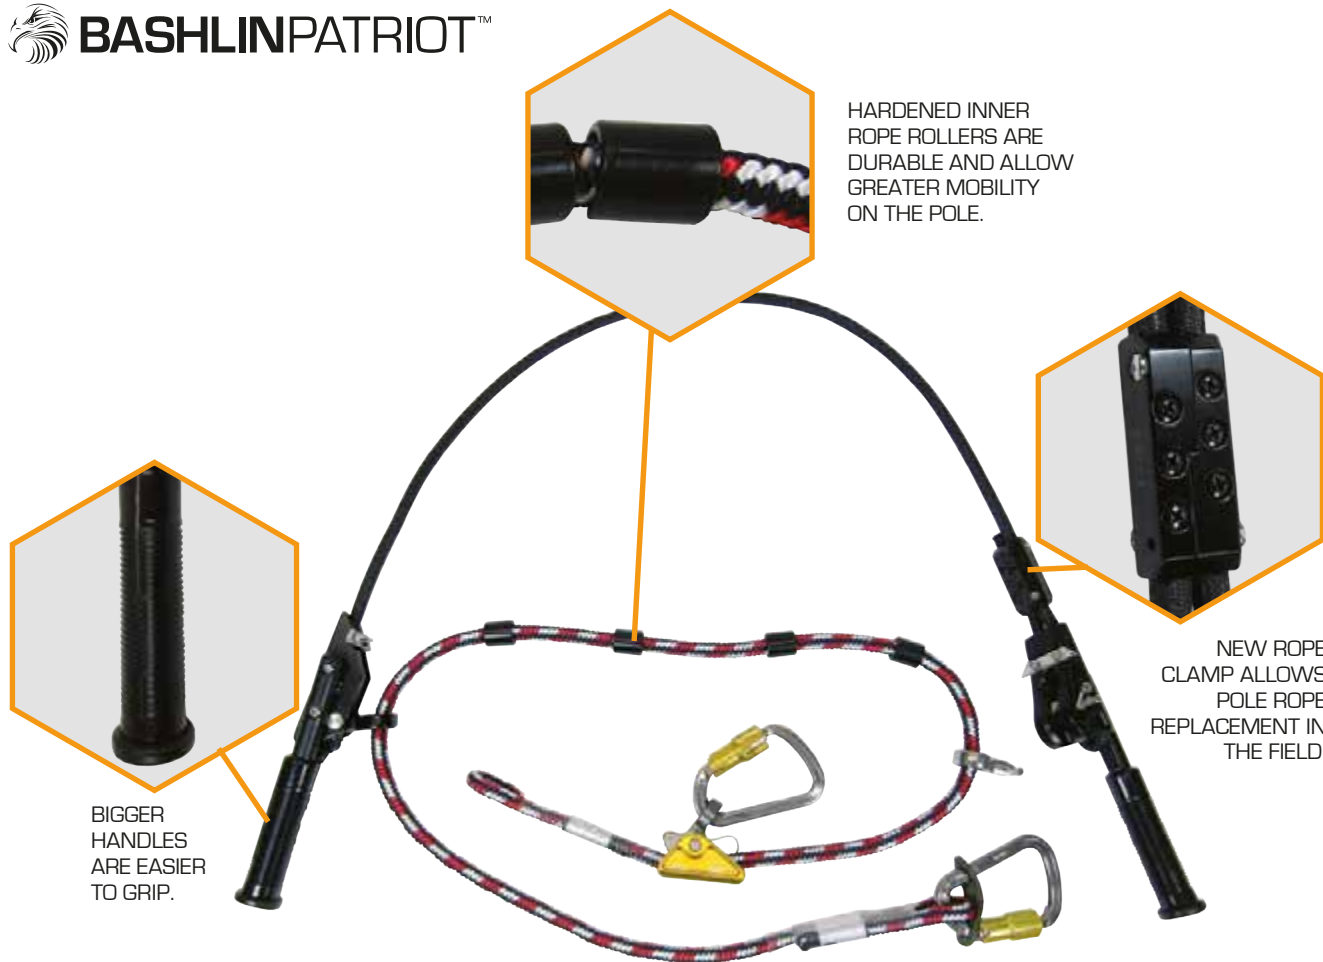

BIGGER HANDLES ARE EASIER TO GRIP.

HARDENED INNER ROPE ROLLERS ARE DURABLE AND ALLOW GREATER MOBILITY ON THE POLE.

NEW ROPE CLAMP ALLOWS POLE ROPE REPLACEMENT IN THE FIELD.

THE PATRIOT™

New and unique design that frees the lineman from the "Tyranny and Restriction" of other fall restraint products.

- Easy, natural movement up and down the pole.
- Light weight - over 20% lighter than other devices.
- Easy movement and light weight=less fatigue for the climber.
- Rope rollers allow freedom of movement left and right while working.
- Easily adapts for left and right handed climbers.

No. 76PAT	6" - 20" diameter poles	Wt: 3.5 lb.
No. 76PAT-T	6" - 30" diameter poles	Wt: 3.5 lb.

REPLACEMENT PARTS

No. 76PAT-ORC	Includes replacement pole rope and rope clamp	Wt: 1.0 lb.
No. 76PAT-OR	Includes replacement rope	Wt: .75 lb.

*The Patriot meets ASTM F887 Type A/B requirements. Including icy or slippery poles.

AN INSTRUCTIONAL VIDEO IS ON OUR WEBSITE OR WWW.BASHLINPATRIOT.COM

AS A RESULT OF INDEPENDENT TESTING THE PATRIOT HAS BEEN CLASSIFIED AS "ERGONOMIST APPROVED".

It's 3.5 lb. weight is less than the 4lb. weight threshold determined by ergonomist studies to cause damaging repetitive motion strains.

The Patriot reduces stress on the arms and shoulders and potential repetitive strain injuries caused by climbing with other Fall Restraint Devices.



WARNING: The carabiners, connector slot and connector latch should be free from debris, open easily and close completely. Verify all connections. The rope clamp should have no signs of stress, no loose screws, nor indicate movement of the line. The red wear indicators of the black outer line, or the red/white/blue inner line should not be visible. If your Patriot has any of these discrepancies, it must be removed from service.

POLE STRAPS



51N-2HL



78A-2HL

50 SERIES



The 6 ply 1 3/4" neoprene coated nylon material uses a tongue buckle adjustment, and has a red wear indicator.

Part No.	Length		Wt:
No. 51N-2HL	5'6"	Pole strap	3.75 lb.
No. 52N-2HL	6'	Pole strap	3.75 lb.
No. 53N-2HL	6'6"	Pole strap	4.0 lb.
No. 54N-2HL	7'	Pole strap	4.0 lb.

78 SERIES



Bashlin's pliable latigo leather straps feature a nylon insert. The stitching is deeply embedded in the leather for longer wear.

Part No.	Length		Wt:
No. 78X-2HL	5'6"	Pole strap	4.25 lb.
No. 78A-2HL	6'	Pole strap	4.25 lb.
No. 78B-2HL	6'6"	Pole strap	4.5 lb.
No. 78C-2HL	7'	Pole strap	4.5 lb.



WARNING: Always visually confirm that the snap is on the D-Ring with the gate closed and locked before allowing the strap to support your body weight. Do not just listen for the "click".



47N-15

EXTENSION STRAPS



Bashlin's extension straps are made from 6 ply nylon and forged steel hardware. The available lengths are 15" and 18".

Part No.	Length		Wt:
No. 47N-15	15"	Extension strap	1.0 lb.
No. 47N-18	18"	Extension strap	1.0 lb.




41NW-2HL

40NW SERIES

The orange woven nylon is soft, pliable, and has a red wear indicator in the center. Adjustment is made with a forged steel friction adjuster.

Part No.	Length		Wt:
No. 41NW-2HL	5'6"	Pole strap	3.5 lb.
No. 42NW-2HL	6'	Pole strap	3.5 lb.
No. 43NW-2HL	6'6"	Pole strap	4.0 lb.
No. 44NW-2HL	7'	Pole strap	4.0 lb.



WARNING: Double action locking snaphooks reduce, but do not eliminate, the possibility of accidental disengagement. Caution and proper work methods including keeping the Snap/D-Ring area free from foreign objects must be practiced at all times. Disabling the gate locks may cause accidents, injury, or death.



WARNING: The 40 and 50 series straps have red wear indicators in the center to help determine when it is time to replace them.

ADJUSTABLE ROPE POSITIONING LANYARDS

- Bashlin's Rope Lanyards for transitioning obstacles when climbing or descending poles are available in several materials with multiple wear protection, adjuster, and snap-hook options.
- Twist lock aluminum carabiner is standard on adjusters.
- Rope options (all have red core for inspection).

YALE BLAZE 16 STRAND XTC

XTC 16 is a tight braid consisting of 16 individual strands of polyester. A high-twist core of torque-balanced polyester keeps the construction firm and round, providing an extra measure of safety. XTC 16 is an excellent choice due to its no snagging, abrasion-resistant construction and excellent energy absorption characteristics.

UNILINE

Uniline is a parallel-core cable of PET (polyester) filament. The Uniline core is bonded together with a rubber-based adhesive, wrapped with red rubber tape, over-braided with a tough polyester sleeve.

**** NEW ****

NEW "R.I.N.G." ROPE

R.I.N.G. Rope is engineered with superior durability and ease of inspection in mind. The modified "TECHNORA" over-braid is designed to maximize cut and abrasion resistance. Inside, you'll find a modified Kernmantle construction. The red polyester sub-sleeve is easily identifiable if the rope becomes compromised due to wear and tear. If the red damage indicator is exposed, just remember - "Red-Is-No-Go!"



WARNING:

Verify connections and red wear indicator.



ADJUSTOR CHOICES

- 4016 Style-standard or straight cam
- 4019 Style-90 degree twist cam



ROPE CONSTRUCTION (ALL HAVE RED CORES FOR INSPECTION)

- Braided rope with PVC cover (NX) (A)
- Braided rope with Ballistic nylon/rope roller (NXBC) (B)
- Durable Yale Uniline (UX) (C)
- Ring rope (TX) (D)



SNAPHOOKS

- Standard steel (1)
- Steel swivel snaphook (SW) (2)
- Aluminum alloy (AL) (3)

ADJUSTABLE ROPE POSITIONING LANYARDS



4019NXBC-8



4019UX-8

4016 LANYARDS - STANDARD ADJUSTOR



No. 4016NX-8	PVC wear cover	Wt. 1.5 lb.
No. 4016NXBC-8	Ballistic nylon wear cover	Wt. 1.5 lb.
No. 4016UX-8	Uniline	Wt. 1.5 lb.
No. 4016NX-8SW	PVC cover/swivel snap	Wt. 1.6 lb.
No. 4016NXBC-8SW	Ballistic nylon/swivel snap	Wt. 1.6 lb.
No. 4016UX-8SW	Uniline/swivel snap	Wt. 1.6 lb.
No. 4016NX-8AL	PVC/aluminum hook	Wt. 1.4 lb.
No. 4016NXBC-8AL	Ballistic/aluminum hook	Wt. 1.4 lb.
No. 4016UX-8AL	Uniline/aluminum hook	Wt. 1.4 lb.

4019 LANYARDS - 90° TWIST



No. 4019NX-8	PVC wear cover	Wt. 1.5 lb.
No. 4019NXBC-8	Ballistic nylon wear cover	Wt. 1.5 lb.
No. 4019UX-8	Uniline	Wt. 1.5 lb.
No. 4019NX-8SW	PVC cover/swivel snap	Wt. 1.6 lb.
No. 4019NXBC-8SW	Ballistic nylon/swivel snap	Wt. 1.6 lb.
No. 4019UX-8SW	Uniline/swivel snap	Wt. 1.6 lb.
No. 4019NX-8AL	PVC/aluminum hook	Wt. 1.4 lb.
No. 4019NXBC-8AL	Ballistic/aluminum hook	Wt. 1.4 lb.
No. 4019UX-8AL	Uniline/aluminum hook	Wt. 1.4 lb.

***** NEW *****



4018TX-8AL




Constructed with 11.5MM Yale "R.I.N.G" Rope, "RAD" device, and an aluminum snap hook. The abrasion and cut resistance of the "TECHNORA" over-braid eliminates the need for additional wear jackets or PVC covers. The "RAD" (Rope Adjustment Device) features an internal breaking system and spring loaded flip out handle which allows for easy one hand operation.

4019TX-8AL



Constructed with 11.5MM Yale "R.I.N.G" Rope, 90° twist stop adjuster and an aluminum snap hook this device will hold up under challenging conditions. The abrasion and cut resistance of the "TECHNORA" over-braid eliminates the need for additional wear jackets or PVC covers.

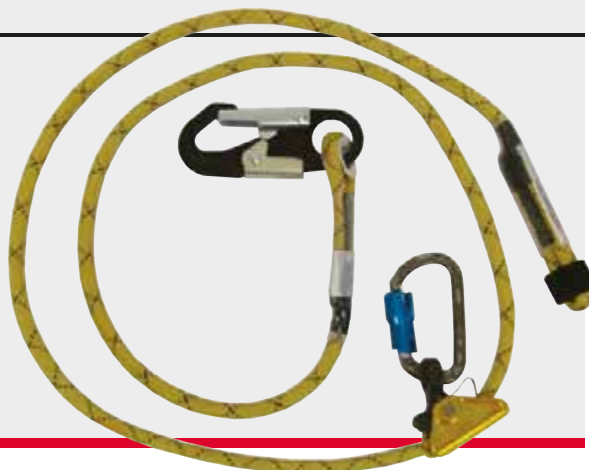

HAND TOOLS



RAUCKMAN'S BUG WRENCHES



- See through port to confirm that the ends are separated.

No. BW221	3/8" - 9/16"	Wt: 0.75 lb.
No. BW2212*	1/2" - 9/16"	Wt: 0.75 lb.
No. BW223	Stamped metal, insulating handle, 9/16" and 3/4"	Wt: 0.75 lb.
No. BW223HD	Heavy-duty, drop-forged, insulating handle, 9/16" and 3/4"	Wt: 0.75 lb.
No. BW2237*	5/8" - 3/4"	Wt: 0.75 lb.
No. BW224*	3/4" - 7/8"	Wt: 0.75 lb.
No. BW244	Heavy-duty, 4-in 1, drop-forged, insulating handle, reversing ratchet, 5/8" and 1/2" - 9/16" and 3/4"	Wt: 0.75 lb.
No. BW288	Heavy-duty, head 1: drop-forged 5/16" hex (Allen) with 2" working length, head 2: ratchet penta socket with built-in 3/8" hex socket for "twist off" lock, insulating handle	Wt: 1.10 lb.
No. BW251	Heavy-duty 4-in 1, drop-forged, insulating handle, reversing ratchet, 5/8" and 1/2" - 9/16" and 3/4"	Wt: .75 lb.
No. R9074	Penta socket with 3/8" drive, deep well	Wt: 0.5 lb.

*Not shown



3146

KLEIN "BELL" LINEMEN'S WRENCH

No. 3146	5/8" hardware	Wt: 2.0 lb.
-----------------	---------------	-------------



KLEIN ADJUSTABLE WRENCHES

- Heavy duty wrenches are made of steel alloy.
- Feature an extra capacity design.
- Plastic dipped handles.

No. D507-8	8" length and 1 1/8" capacity	Wt: 1.0 lb.
No. D507-10	10" length and 1 5/16" capacity	Wt: 1.0 lb.
No. D507-12	12" length and 1 1/2" capacity	Wt: 1.5 lb.



LOWELL LINEMEN'S WRENCHES

- Square socket fits 3/4", 1", 1 1/8".
- Hex end fits 9/16", 3/4", and 5/8" square nuts.
- Reversing lever at head.
- Bolt-thru design.

No. 100TDE	8 1/4" ergo grip	Wt: 1.5 lb.
No. 101TDE	9 1/4" steel handle	Wt: 2.0 lb.
No. 103TDE	12 1/4" steel handle	Wt: 2.25 lb.

TRIPLE SQUARE

- 3/4", 1", 1-1/8"

No. 150-12	12" steel handle	Wt: 2.5 lb.
-------------------	------------------	-------------

QUAD WRENCH

- 3/4", 13/16", 1", 1 1/8"

No. 8D	12" ergo handle	Wt: 1.5 lb.
---------------	-----------------	-------------

Bashlin sells the complete line of Lowell products. Call or write for information.

HAND TOOLS



D213-9NE



D2000-9NE



D2000-9NETH

LINEMEN'S PLIERS

- Made in the U.S.A.
- Designed for professional use.
- Plastic dipped handles.

No. D213-9NE	Klein's most popular (9")	Wt: 1.25 lb.
No. D2000-9NE	Klein hardened jaws (9")	Wt: 1.25 lb.
No. D2000-9NETH	Klein with 5/8" thread cleaners	Wt: 1.25 lb.



420G



430G

ADJUSTABLE PLIERS

- The original Channellock® plier.
- Made in the exact same standards that earned it a quality reputation.

No. 420G	9 1/2" with coated handles	Wt: 1.0 lb.
No. 430G	10" with coated handles	Wt: 1.0 lb.



BSK20



BSK25



BSK30



BSK50



1570-3

LINEMEN'S SKINNING KNIVES

- Plastic handle.
- A ring for hanging on a tool belt or tool board.

No. BSK20	Curved point, 9 1/4" OAL No ring	Wt: 0.5 lb.
No. BSK25	Curved point, 9 1/4" OAL	Wt: 0.5 lb.
No. BSK30	Curved point, 10" OAL	Wt: 0.5 lb.
No. BSK50	Curved point, for shotgun stick, 10" OAL	Wt: 0.5 lb.
No. 1570-3	Curved point, 10" OAL	Wt: 0.4 lb.



1550-4



44005



44218



44219

KLEIN FOLDING LINEMEN'S KNIFE

- 2.5" hardened locking blades.

No. 1550-4	Wood grain plastic with ring	Wt: 1.0 lb.
No. 44005	Impact-resistant handle with rubber insert	Wt: 0.5 lb.
No. 44218	Skinning knife with replaceable blade	Wt: 0.5 lb.
No. 44219	Replacement blades (3 pack)	Wt: 0.1 lb.

HAND TOOLS



HAMMERS

- Made in the USA.

No. B6232	Vaughn line hammer	Wt: 2.0 lb.
No. B832	Klein claw hammer	Wt: 2.5 lb.
No. B809	Klein double face hammer	Wt: 2.5 lb.
No. B816	Klein linemen's hammer	Wt: 2.5 lb.
No. 11417N	Plumb waffle hammer	Wt: 2.5 lb.



KLEIN SCREWDRIVERS

- Features a square shank, keystone tip, cushion grip.


No. 600-4	8 11/32" OAL, 1/4" tip width and 4" shank	Wt: 0.4 lb.
No. 600-6	10 15/16" OAL, 5/16" tip width and 6" shank	Wt: 0.5 lb.
No. 600-8	13 7/16" OAL, 3/8" tip width and 8" shank	Wt: 0.6 lb.
No. 600-12	17 7/16" OAL, 1/2" tip width and 12" shank	Wt: 1.0 lb.
No. 602-7DD	7" round shank demo driver	Wt: 0.5 lb.



STAPLE STICKS

- Makes driving staples safer and more efficient.
- Simply load 12 staples ahead of time and hammer them through when needed.
- There is no fumbling, and the risk of a glove puncture is minimized.

No. BSS2000	Staple stick for 3/4" staples	Wt: 0.5 lb.
No. BSS2001	Staple stick for 1" staples	Wt: 0.5 lb.

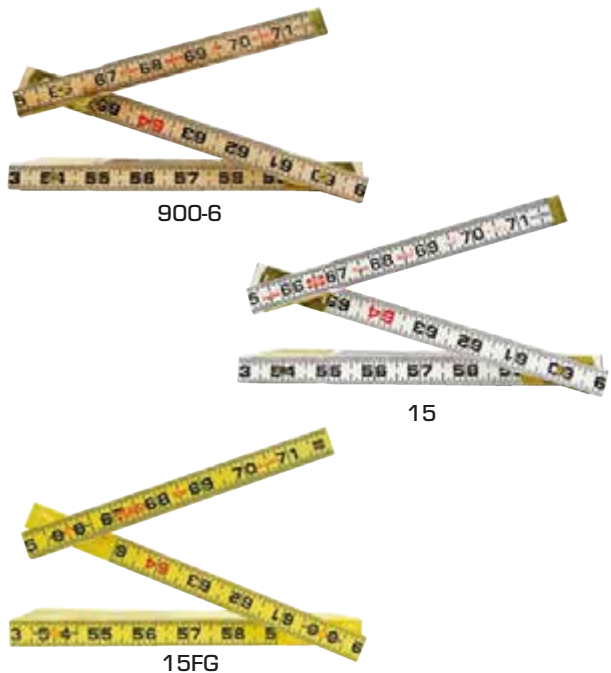

FOLDING RULES

- Features either an inside read or an outside read.

No. 900-6	Klein 6' inside read wood	Wt: 0.3 lb.
No. 15	Lufkin 6' dual read wood	Wt: 0.3 lb.
No. 15FG	Rigid 6' inside read fiberglass	Wt: 0.3 lb.

EQUIPMENT INSPECTION

Bashlin's Climbing Equipment is to be inspected before each use. If in the course of your inspection any of your tools are found to be defective, they must be removed from service immediately. Follow your company procedures for replacement. If there are any questions, please contact us. Properly maintaining your equipment is an investment in your well-being.



HOW TO INSPECT YOUR EQUIPMENT

Here are the components of your equipment that need to be carefully inspected. Remove any product from service that has any of the following conditions.

TOOL BELTS

(ESTIMATED SERVICE LIFE 5-8 YEARS)

- (A) Hardware-electrical burns, cracks, deformation, loose attachment points.
- (B) Sewing-loose, cut, broken or frayed stitches.
- (C) Leather or Nylon material-Abrasion, fraying, cracking, cuts or chemical deterioration.
- (D) Rivets-loose or bent rivets.
- (E) Tool loops-holsters-bug bags-elongated loops, loose attachments, cut straps, worn bag bottoms.
- (F) Belt tongue-broken stitches, elongated holes, worn or abraded material.

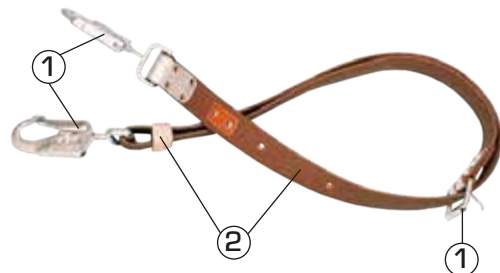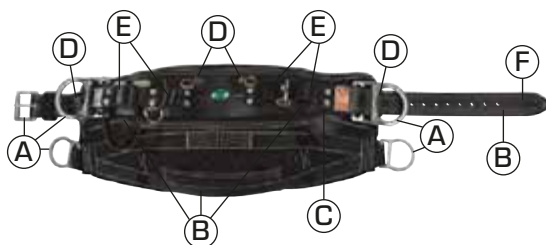

FALL RESTRAINTS/POLE STRAPS/ SECONDARY LANYARDS

(ESTIMATED SERVICE LIFE 1 - 4 YEARS)

- (1) Hardware-electrical burns, cracks, bends, deformation, loose attachment, improper latch movement and gate spring tension, sticking adjuster cams or carabiner gates, loose set screws.
- (2) Nylon, leather or rope-abrasion that exposes red wear indicator, cuts, fraying, broken stitches, chemical damage.



CLIMBERS

(ESTIMATED SERVICE LIFE IS WHEN 2ND SET OF GAFFS HAVE WORN OUT)

- (A) Straps and pads-cuts, extreme abrasion, elongated holes, loose attachment points, chemical damage.
- (B) Shank-electrical burns, cracks, deformation, worn stirrup (thinning), improper slide adjustment. Careful inspection is required to the "critical" portion of the climber shank, 4-8" above the gaff attachment point. Scratches and cuts in this section may cause stress risers, accelerate wear and allow the shank to fail prematurely.
- (C) Gaffs-loose attachment, electrical burns, and incorrect shape. See Bashlin Information booklet BLCL514 for gaff shaping information, or go to www.bashlin.com and see the gaff shaping video.



Additional detailed information is available by request or online.




FALL PROTECTION AND RESCUE EQUIPMENT FOR LINEMEN AND GENERAL INDUSTRY

Bashlin Industries, Inc. offers field proven products and innovative engineered solutions for all your fall protection needs. Our products meet the ASTM, ANSI and OSHA requirements, including Arc Flash resistant harnesses and lanyards. In fact, we were one of the first companies to participate in the testing leading to the current ASTM Arc Flash standards.

FALL PROTECTION EQUIPMENT GENERAL INFORMATION

BASIC COMPONENTS OF FALL PROTECTION EQUIPMENT:

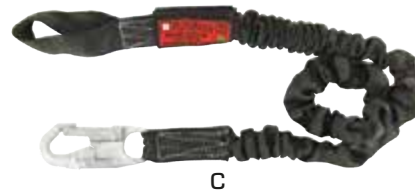

- A. ANCHORAGE/ANCHORAGE CONNECTORS:**
A secure point that will endure the force of arresting a worker's fall. In most situations OSHA requires a strength rating of 5,000 lb. or more for a single worker's anchorage.
- B. HARNESS:** A device made of webbing, buckles, and D-Rings designed to hold the worker securely, distribute arresting forces, and provide a point to attach a lanyard connecting the individual to an anchorage.

- C. LANYARD:** A web product connecting the worker to the anchorage. It must include a shock absorbing device for fall arrest applications.
- D. CONNECTING DEVICES:** Snaphooks, carabiners, and D-Rings that link the various components of the personal fall protection equipment.

FALL PROTECTION EQUIPMENT CRITERIA

Bashlin expands on these basic ideas for the specific desires of our customers. The big question is, what do you need? Here are some things to consider:

ANCHORAGE/ANCHORAGE CONNECTORS:

- Does it have the required strength?
- Can it be easily accessed? Will the lanyards and fall lines remain clear of tangles and damaging edges?
- Are the connections and combinations of the hardware compatible to reduce the possibility of accidental disengagement or damage in an arrested fall?
- Are the connections close and as directly above the user as possible, and high enough to keep the worker from striking a lower level during an arrested fall?

LANYARDS

- Are the lanyards as short as possible (6' maximum)?
- Does the free-fall distance comply with OSHA requirements?
- Do the connections to the anchorage and harness comply with industry standards?
- Is a shock absorber required or necessary?

HARNESSES

- What are the OSHA requirements for the work situation?
- Does the work require positioning capabilities or only fall arrest?
- Can or will the fall protection equipment be used to aid in the rescue of a worker?

INSPECT BEFORE EACH USE.

PROPER USE AND CARE OF HARNESSES



- Read, understand, and follow all instructional material included with or attached to these products.
- Do not use these products without proper training.
- Check that all buckle hardware and closures are aligned properly, are free from damage, and are functioning properly.
- Harness should be properly sized to the individual user. See page 37 for sizing chart.
- Adjust harness to obtain a “snug” fit by adjusting friction adjusters and buckles on shoulder and leg straps. When adjusted correctly the back attachment should be located between the shoulder blades of the user.
- Utilize elastic bands and plastic keepers to control excess webbing after adjustments are made.
- Avoid exposing safety harness to excessive heat, chemicals, and prolonged exposure to sunlight that can degrade the materials.

CARING FOR YOUR HARNESS

Proper care for your harness is quick and easy by simply following these guidelines.

CLEANING

“Hand Washing” is recommended using a mild laundry detergent. Rinse completely and hang to dry. Product can also be machine washed in a mesh bag on the gentle cycle. **DO NOT** machine dry.

STORAGE

Store Harness in a ventilated area protected from moisture, heat, chemicals, and UV Light. Bashlin’s 10HB harness bag is a great storage option.



10HB



INSPECTION

- Inspect before use.
- All tagging and labeling must be present and legible.
- Hardware should be free from electrical contact marks, cracks, deformities, corrosion, and must function properly.
- Webbing shall not have cuts, burns, broken stitching, excessive abrasion or chemical degradation.
- “Shock” load indicators are intact and have not been deployed.

If any of the above issues are detected, remove product from service immediately.



NYLON HARNESS EXPOSED TO ARC FLASH



UNDAMAGED UNDERSIDE OF SAME WEBBING

BASHLIN HARNESSSES are available in the X or H design. The X (683) models are sized. The H (662) are one size fits most.

BASHLIN HARNESSSES AND LANYARDS ARE ASTM ARC FLASH COMPLIANT AND THIRD PARTY TESTED.



BASHLIN'S NON-CONDUCTIVE BUCKLES, ADJUSTORS AND SNAPHOOKS ARE RATED AT 9KV.

X-STYLE & H-STYLE

BACK ATTACHMENT OPTIONS



ALUMINUM D-RING (D2)



NYLON WEB LOOP (A)



DIELECTRIC D-RING (D1)



STANDARD D-RING (D)



2' NYLON LOOP EXTENSION (B)



2' SMALL D-RING EXTENSION (C)



6' NYLON WEB LOOP WITH SMALL D-RING (C6)



OPTIONS AVAILABLE (NOT PICTURED):

- LW06B:** 6' with B-LAN shock absorber
- LWA6B:** 6' adjustable with B-LAN shock absorber
- L2805-4HL:** 4' or 6' (6HL) polyester core/tubular web shock absorber

ARC FLASH HARNESS OPTIONS

X-STYLE

H-STYLE



HOW TO CORRECTLY CHOOSE BODY HARNESS OPTIONS:

- Choose a base harness style (ex.: 683X)
- Choose a back attachment(s) (ex.: 683XA)
- Choose other harness options (ex.: 683XAP)
- Choose a size (ex.: 683XAP-L)



SHOULDER D-RINGS (S)



DIELECTRIC BUCKLES (DEQ)



SHOULDER PADS (N)



NYLON WEB LOOPS ON SHOULDERS (T)



SHOULDER/BACK PAD COMBO (X)



QUICK RELEASE BUCKLES (Q) (PREFIX)



REFLECTIVE MATERIAL ON WEBBING (G)



656 SERIES POSITIONING BELT (D-SIZE REQUIRED) (P)



LEATHER BUCKLE PAD (F)



NEOPRENE BUCKLE PADS (G)



COATED HARDWARE (E)



RESCUE LOOPS ON CHEST (R)



ReSTEP SUSPENSION TRAUMA DEVICE (R2)


SIZING CHART - BASED ON HEIGHT AND CHEST SIZE

X-STYLE 683 AND H-STYLE 662V

SIZE		HEIGHT	CHEST
S	Small	5' 4" - 5' 7"	36 in.
M	Medium	5' 8" - 5' 11"	40 in.
L	Large	6' 0" - 6' 3"	44 in.
X	X-Large	6' 3" - 6' 6"	48 in.
2XL	XX-Large	6' 6" +	52 in.
3XL	XXX-Large	6' 6" +	56 in.

H STYLE HARNESSES-662R AND 662A

SIZE		HEIGHT	CHEST
0	One Size Fits Most	5' 4" - 6' 3"	48 in.
X	X-Large	6' 3" - 6' 6"	54 in.
2X	XX-Large	6' 6" - 6' 10"	60 in.

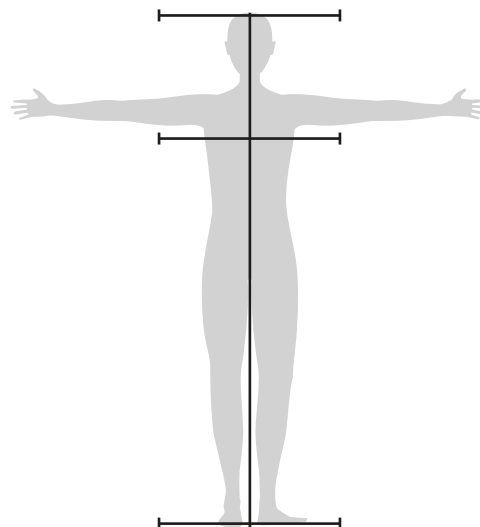

AERIAL LIFT AND GENERAL USE ARC FLASH HARNESSSES

683 "X" STYLE SERIES



The 683 "X" is Bashlin's premier body harness. Originally designed for the utility industry, this harness sets the standard for comfort, flexibility and ease of use. The hardware is low on the waist, and a loop is in the front for rescue or work positioning. Available with pass through friction buckles or quick release buckles. [Size required, see page 37.](#)

BASHLIN'S HARNESSSES MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED



683XC

"X" HARNESS WITH 24" EXTENSION BACK ATTACHMENT

- X-Style full body harness.
- Pass through buckles.

No. 683XB 24" extension with nylon loop Wt. 3.5 lb.
No. 683XC 24" extension with D-Ring Wt. 3.5 lb.



683XD

"X" HARNESS WITH D-RING BACK ATTACHMENT

- X-Style full body harness.
- 3" D-Ring.

No. 683XD Pass through buckles Wt. 4.0 lb.
No. 683GD Grommet leg straps Wt. 4.5 lb.



Shown with additional options BQ683XA

"X" HARNESS B683X BLACK OUT SERIES

- X-Style full body harness.
- Black webbing with orange stitching.

No. B683XA With nylon loop Wt. 4.5 lb.
No. B683XD With D-Ring Wt. 4.5 lb.



683XA

"X" HARNESS WITH NYLON LOOP BACK ATTACHMENT

- X-Style full body harness.
- 3" nylon loop for lanyard attachment.

No. 683XA Pass through buckles Wt. 4.0 lb.
No. 683GA Grommet leg straps with pass through buckles Wt. 4.5 lb.



683ID

"X" HARNESS WITH BELT ATTACHMENT

- X-Style full body harness.
- Allows user to attach work belt to harness.

No. 683IA With nylon loop Wt. 4.5 lb.
No. 683ID With D-Ring Wt. 4.5 lb.

AERIAL LIFT AND GENERAL USE ARC FLASH HARNESSSES

662 "H" STYLE SERIES



The 662 Series is a fully adjustable, one size fits most full body harness, in the "H" style. This harness also has a dorsal seat strap and 10,000 lb. test web.

Size required, see page 37.



662RD

"H" HARNESS WITH D-RING BACK ATTACHMENT

- H-Style full body harness.
- Pass through buckles.

No. 662AD	Moveable chest strap	Wt. 4.0 lb.
No. 662RD	Fixed chest strap	Wt. 4.0 lb.
No. 662GD	Moveable chest strap and grommet legs	Wt. 4.5 lb.



662RA

"H" HARNESS WITH NYLON LOOP BACK ATTACHMENT

- H-Style full body harness.
- 1" nylon web loop.

No. 662AA	Moveable chest strap	Wt. 4.5 lb.
No. 662RA	Fixed chest strap	Wt. 4.0 lb.
No. 662GA	Moveable chest strap and grommet legs	Wt. 4.5 lb.



662AC

"H" HARNESS WITH 24" EXTENSION BACK ATTACHMENT

- Available with or without 2" D-Ring.
- Use only with lanyards that are 4' or less.

No. 662AB	With loop end	Wt. 4.5 lb.
No. 662AC	With D-Ring	Wt. 4.5 lb.
No. 662RB	Fixed chest strap with nylon loop	Wt. 4.0 lb.
No. 662RC	Fixed chest strap with D-Ring	Wt. 4.0 lb.



662ID

662 "H" HARNESS WITH BELT ATTACHMENT

- H-Style full body harness.
- Allows user to attach work belt to harness.
- Nylon "A" loop or D-Ring back attachment available.

No. 662ID	Pass through buckles with D-Ring	Wt. 4.5 lb.
No. 662IA	Pass through buckles with nylon loop	Wt. 4.5 lb.



DID YOU KNOW?

QUICK RELEASE BUCKLES ARE AVAILABLE ON ALL BASHLIN HARNESSSES (Q).

AERIAL LIFT AND GENERAL USE ARC FLASH HARNESSSES



662VA



Shown with additional options BQ6662A

"H" HARNESS 662VA

- H-Style full body harness with a nylon "A" loop or D-Ring back attachment.
- Hook-N-Loop chest closure with pass through friction buckles.
- Sized as an X-Style harness (S-2X). See page 37.

No. 662VA	Pass through buckles with nylon loop	Wt. 4.0 lb.
No. 662VD	Pass through buckles with D-Ring	Wt. 4.0 lb.

"H" HARNESS B662A BLACK OUT SERIES

- 662 H-Style harness in black webbing and orange stitching.
- Moveable chest strap with pass through buckles.
- Size required, see page 37.

No. B662AA	With nylon loop	Wt. 4.5 lb.
No. B662AD	With D-Ring	Wt. 4.5 lb.

DIELECTRIC HARNESSSES



Bashlin's X-Style and H-Style harnesses are available with dielectric buckles and snap hooks constructed with nylon molded over heat treated alloy steel to produce a minimum rating of 9kV. Lanyards are also available. [Size required, see page 37.](#)



DEQ683XA



DEQ662HA

"X" DIELECTRIC HARNESS

- Quick release buckles.
- Available with nylon "A" loop or dielectric D-Ring.
- Size required, see page 37.

No. DEQ683XA	Nylon web loop	Wt. 3.5 lb.
No. DEQ683XD1	Dielectric D-Ring	Wt. 4.5 lb.

"H" DIELECTRIC HARNESS

- Quick release buckles.
- Available with nylon "A" loop or dielectric D-Ring.
- Size required, see page 37.

No. DEQ662HA	Nylon web loop	Wt. 4.0 lb.
No. DEQ662HD1	Dielectric D-Ring	Wt. 4.5 lb.

CLIMBING, SUBSTATION, AND TOWER HARNESSSES



Shown with additional options Q6622ACGR2X.

Q662ZA SERIES: ZEUS "H" STYLE ARC FLASH FULL BODY HARNESS

- At just 7.5 lbs. this full body H-Style harness has an integral stacked 4 D-Ring belt with aluminum D-Rings, quick release buckles, and Dri-Lex moisture wicking pad.
- Rescue loops on chest.
- Sizes as follows: Small (S) D18-21; Medium (M) D22-25; Large (L) D26-28; X-Large (X) D29-32.

No. Q662ZA Quick release buckles with nylon loop Wt. 7.5 lb.

CALL US TO PLACE AN ORDER WITH ANY OF THE ADDITIONAL OPTIONS AVAILABLE:

- (A) Nylon loop dorsal attachment
- (C) 2' Extension
- (D2) Aluminum D-Ring
- (G) Neoprene buckle pads
- (R2) RESTEP Suspension Trauma Straps
- (X) Mesh shoulder/back pad



10HB

HARNESS BAGS

- Store and protect your body harness from most mechanical, chemical and UV damage in this high visibility orange canvas bag.

No. 10HB Harness bag Wt. 1.0 lb.



683XAP
Shown with "X" Pad.



683 "X" STYLE CLIMBING HARNESS

- Available with 656CM tool belt.
- Belt easily removed from harness.
- Front attachment point for work positioning on ladders or rescue.
- Size both harness and tool belt "D" size.

No. 683XDP	With 3" D-Ring	Wt. 8.0 lb.
No. 683XAP	With nylon loop	Wt. 8.0 lb.
No. 683XBP	With 24" loop extension	Wt. 8.0 lb.
No. 683XCP	With 24" D-Ring extension	Wt. 8.0 lb.



QFE683EZW

FE683EZW TOWER HARNESS

- 683 X-Style harness
- Extra support and comfort EZ-Rider belt.
- Available with "A" loop or D-Ring.
- Size both harness and tool belt "D" size.

No. FE683EZW Pass through buckle Wt. 11.0 lb.

DID YOU KNOW?

QUICK RELEASE BUCKLES ARE AVAILABLE ON ALL BASHLIN HARNESSSES (Q).

HARNESSES FOR CONFINED SPACE, RESCUE



BEDQ683XD1



683XDT



BEDQ683XD1 "X" STYLE HARNESS

- Dielectric D-Ring with 18" nylon loop choked into D-Ring.
- Four "A" loops with reflexite (two on shoulders and two on hips).
- Leather buckle pads.
- Size required, see page 37.

No. **BEDQ683XD1** X-Style harness

Wt. 4.5 lb.

CONFINED SPACE HARNESS

- Bashlin standard 683X and 662 H-Style harnesses for confined space entry are available with specialty options such as shoulder loops, hip loops, and high visibility material on webbing.
- Available in X-Style or H-Style.
- Pass through buckles standard.

No. **683XDT**

D-Ring, nylon shoulder loops

Wt. 4.0 lb.

No. **662ACS**

24" D-extension and shoulder D-Rings

Wt. 5.0 lb.



BED662VDEF



BED662VDEF "H" STYLE HARNESS

- Dielectric D-Ring with 18" nylon loop choked into D-Ring.
- Four "A" loops with reflexite (two on shoulders and two on hips).
- Coated hardware.
- Leather buckle pads.
- Hook-N-Loop and loop chest closure.
- Size required, see page 37.

No. **BED662VDEF** H-Style harness

Wt. 4.5 lb.



683X HARNESS OPTIONS (EX.):

683X STYLE HARNESS (683XC6EQT) WITH 6" EXTENSION, SMALL D-RING, COATED HARDWARE, REFLEXITE, AND NYLON SHOULDER LOOPS.

🔍 DID YOU KNOW?

QUICK RELEASE BUCKLES ARE AVAILABLE ON ALL BASHLIN HARNESSES (Q).

LANYARDS FOR AERIAL LIFT/ FALL PROTECTION



 BASHLIN'S LANYARDS MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED



2000 SERIES B-LAN SHOCK ABSORBING LANYARDS

The B-LAN shock absorber pack reduces shock forces to the user by drawing the nylon web through a compressed steel tube (as a result of a fall event).

The maximum and standard length of the 2000 series lanyard is 6'. Shorter lengths are available on request.



No. 2004NWB-6HL

Shock absorbing lanyard. 1" nylon web with B-LAN and two SL6650A rope snaphooks.

Wt. 2.5 lb.



No. 2005NWB-6HL

Shock absorbing lanyard – 1" nylon web with B-LAN, a SL6650A rope snaphook and a loop end.

Wt. 2.0 lb.



No. 2005NWB-6DE

1" nylon web with B-LAN, a non-conductive dielectric snaphook, and a loop end.

Wt. 1.75 lb.



No. 2015NWB-6HL

Shock absorbing lanyard – 1" nylon web with B-LAN, a SL6650A rope snaphook and a 3005A aluminum carabiner.

Wt. 2.0 lb.



No. 2017NWB-6HL

Shock absorbing lanyard – 1" nylon web with B-LAN, a SL6650A rope snaphook and a 3005 steel carabiner.

Wt. 2.0 lb.



No. 2002NWB-6HL

Shock absorbing lanyard – 1" nylon web with B-LAN, a SL6650A rope snaphook and a 5395A large ladder snaphook.

Wt. 3.0 lb.

LANYARDS FOR AERIAL LIFT/ FALL PROTECTION



BASHLIN'S LANYARDS MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED



2800 SERIES – POLYESTER SHOCK ABSORBING CORE

The 2800 series lanyards are constructed using tubular nylon web with a woven polyester core that absorbs forces as it expands in a fall event.

The maximum and standard length of the 2800 series lanyard is 6'. Shorter lengths are available on request.



No. 2805-6DE

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a non-conductive dielectric snaphook and a loop end.

Wt. 2.0 lb.



No. 2815-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005A carabiner.

Wt. 2.0 lb.



No. 2804-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core and two SL6650A snaphooks.

Wt. 2.5 lb.



No. 2817-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005 carabiner.

Wt. 2.0 lb.



No. 2805-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a loop end.

Wt. 2.0 lb.



No. 2802-6HL

Shock absorbing lanyard – tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 5395A large snaphook.

Wt. 3.5 lb.

LANYARDS FOR AERIAL LIFT/ FALL PROTECTION



 BASHLIN'S LANYARDS MEET ASTM F887 ARC-FLASH REQUIREMENTS AND ARE 3RD PARTY CERTIFIED

2300 SERIES-POLYESTER SHOCK ABSORBING CORE WITH "STRETCH"

The 2300 series lanyards are constructed using tubular nylon web with a woven polyester core that absorbs forces as it expands in a fall event. Elastic cord has been added to allow the lanyard to "stretch" and contract minimizing length while using. Standard length is 6'.



No. 2317-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005 carabiner.

Wt. 2.0 lb.



No. 2306-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core and two SL6650A snaphooks.

Wt. 2.5 lb.



No. 2302-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 5395A large ladder hook.

Wt. 3.5 lb.



No. 2305-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snap hook, and a loop end.

Wt. 2.0 lb.



No. 2315-6HL

Shock absorbing "stretch" lanyard – 2" tubular nylon web with polyester shock absorbing core, a SL6650A snaphook and a 3005A carabiner.

Wt. 1.5 lb.



WARNING: Limiting the lanyard length to 6' will not ensure a free fall of 6' or less. The lanyard length, plus anchor point and work location together will determine the free fall distance.

DID YOU KNOW?

BASHLIN LANYARDS ARE AVAILABLE WITH THE FOLLOWING OPTIONS AND FEATURES:

- Forged steel snaphooks (SL6650A), steel carabiner (3005), aluminum carabiners (3005A), or large ladder snap (5395A).
- 1" nylon web, and 1" tubular web.
- Manufactured to ANSI, ASTM, and OSHA requirements.

2-LEG LANYARDS FOR CLIMBING TOWERS



B-LAN SERIES

The B-LAN shock absorber pack reduces fall arrest forces in a fall event by drawing the nylon web through a compressed steel tube.



B-LAN STYLE - "Y" CLIMBING LANYARD



No. 2027-6HL

Twin leg climbing lanyard with nylon loop, two large steel ladder hooks, and B-LAN shock absorber.

Wt. 5.0 lb.

Wt. 5.0 lb.



CAUTION: Lanyards may be connected to D-Rings on harnesses (D) with web/rope loops, and properly dimensioned carabiners or snaphooks. Nylon back attachments, (C) require web/rope loops or properly dimensioned carabiners. Snaphooks are not to be used with (C) attachment points. See page 49.



No. 2028NWB-6HL

Twin leg climbing lanyard with steel rope snap, two large steel ladder hooks, and B-LAN shock absorber.

Wt. 5.0 lb.

No. 2028-6AL

Twin leg climbing lanyard with aluminum rope snap, two large aluminum ladder snaphooks, and B-LAN shock absorber.

Wt. 5.0 lb.



HITCHING A LANYARD TO A HARNESS.



Large ladder snap hooks have a 2.5" opening.

2-LEG LANYARDS FOR CLIMBING TOWERS



POLYESTER SHOCK ABSORBING CORE STYLE - "Y" CLIMBING LANYARD

The 2300/2800 series lanyards are constructed using tubular nylon web with a woven polyester core that absorbs forces as it expands in a fall event. Standard length is 6'

AVAILABLE IN SHORTER LENGTHS UPON REQUEST.



No. 2328-6AL

Twin leg tubular nylon "stretch" climbing lanyard with aluminum snap hook, two large aluminum ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



No. 2327-6HL

Twin leg tubular nylon "stretch" climbing lanyard with nylon loop, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



No. 2827-6HL

Twin leg tubular nylon climbing lanyard with nylon loop, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



No. 2827-6AL

Twin leg tubular nylon climbing lanyard with nylon loop, two large aluminum ladder snaphooks, and shock absorbing core.

Wt. 4.5 lb.



No. 2828-6HL

Twin leg tubular nylon "stretch" climbing lanyard with steel snap hook, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.0 lb.



No. 2328-6HL

Twin leg tubular nylon "stretch" climbing lanyard with steel snap hook, two large steel ladder snaphooks, and shock absorbing core.

Wt. 5.5 lb.

POSITIONING LANYARDS



4000 SERIES – FIXED LENGTH POSITIONING LANYARDS

This series is designed for and mostly used in positioning applications. In certain situations they can be used for fall arrest, if they are used with a shock absorbing device and if all other applicable requirements are met.

The maximum and standard length of the 4000 series lanyard is 6'. Shorter lengths are available on request.



No. 4005NW-6HL
1" nylon web with SL6650A rope snaphook and one loop end.

Wt. 2.0 lb.



No. 4002NW-6HL
1" nylon web with SL6650A rope snaphook and 5395A large ladder snaphook on the ends.

Wt. 3.5 lb.



No. 4017NW-6HL
1" nylon web with SL6650A rope snaphook and 3005 steel carabiner on the ends.

Wt. 2.5 lb.



No. 4004NW-6HL
1" nylon web with SL6650A rope snaphooks on the ends.

Wt. 2.5 lb.



PROPER USE AND CARE OF LANYARDS




A



E



B



C



F




G



D



D



D



H

- Read, understand, and follow all instructional material included with or attached to these products. (A)
- Inspect before use.
- Make sure connector on end of lanyard is compatible with harness and anchor point and working properly. (B)
- Do not attach a snap hook directly into a nylon back attachment. (C) Use a locking carabiner or a lanyard that has loop at one end that can be "hitched" to the nylon loop. (D)

- Do not connect two lanyards together to make a lanyard as this will increase your free fall potential. (E)
- Do not use "knots" to shorten a lanyard as this will decrease the strength of the device by 30% or more. (F)
- Do not connect snap hook back into itself (boiler hitch). (G)
- Utilize parking tabs to store free end of lanyard to reduce tripping and entanglement hazards when walking. (H)
- Avoid dragging or allowing lanyards to lay on ground exposing it to chemical or mechanical damage.

INSPECTION

- Inspect before use.
- All tagging and labeling must be present and legible.
- Hardware should be free from electrical contact marks, cracks, deformities, corrosion, and must function properly.
- Webbing shall not have cuts, burns, broken stitching, excessive abrasion, or chemical degradation.
- "Shock" Load indicators are intact and have not been deployed.

If any of the above issues are detected, remove product from service immediately.

CARING FOR YOUR LANYARD

Proper care for your Lanyard is quick and easy by simply following these guidelines.

CLEANING

"Hand Washing" is recommended using a mild laundry detergent. Rinse completely and hang to dry. Product can also be machine washed in a mesh bag on the gentle cycle. **DO NOT** machine dry.

STORAGE

Store Lanyard in a ventilated area protected from moisture, heat, chemicals, and UV light.

ANCHORAGES/CONNECTORS



703



703R-2D



2011P



2011P1



2012P

BOOM STRAPS



- 10,000 lb. test nylon web.
- Nylon pads.
- Corrosion resistant.
- Standard length is 55"

No. 703	Boom strap with friction buckle	Wt. 2.0 lb.
No. 703R	Boom strap with ratchet	Wt. 3.5 lb.
No. 703R-2D	2 D-Ring boom strap for overcenter lifts	Wt. 4.5 lb.

NYLON ANCHOR STRAPS



- Rated at 5,000 lb.
- Standard 3' or 4' lengths.
- Longer lengths are available on request.

No. 2011P-36	36" anchor strap with hardware	Wt. 1.75 lb.
No. 2011P-48	48" anchor strap with hardware	Wt. 1.75 lb.
No. 2011P1-36	36" anchor strap	Wt. 1.0 lb.
No. 2011P1-48	48" anchor strap	Wt. 1.0 lb.
No. 2012P-36	36" anchor strap	Wt. 0.7 lb.
No. 2012P-48	48" anchor strap	Wt. 0.7 lb.

WARNING: Bashlin boom straps, even those with 2 D-Rings are for one worker only. Each worker must have his/her own individual anchorage.

CAUTION: Nylon anchor straps require padding for protection over sharp edges.



B3732

ANCHORAGE CONNECTORS



- Can be permanently secured to a structure.
- Tested to 5,000 lbs.

No. B3732	4.25" x 2.9" with 2.8" opening	Wt. 1.0 lb.
------------------	--------------------------------	-------------

HARDWARE/DESCENT DEVICES

CARABINERS



These are convenient connectors for many applications. Only triple locking carabiners are to be used for fall protection. Bashlin's carabiners are rated at a minimum of 5000 lb. (*OAL is overall length).



3006



3008A

TRIPLE LOCK DESIGN FOR FALL PROTECTION SYSTEMS



- No. 3006** Steel 5" OAL with 1" gate opening Wt. 1.0 lb.
- No. 3008A** Aluminum 47/8" OAL with 7/8" gate opening Wt. 0.3 lb.



3006K



3004

TWIST LOCK AND SCREW LOCK CARABINERS

- For rescue and material handling.

- No. 3006K** Steel twist lock 5" OAL with 1" opening Wt. 0.9 lb.
- No. 3004** Steel screw lock 5" OAL with 1 1/4" opening Wt. 1.1 lb.



SL6650A

ROPE SNAPHOOKS



- Forged steel rated at a minimum of 5000 lb. and meeting the OSHA and ANSI standards.

- No. SL6650A** 5 9/16" OAL 34" gate opening Wt. 0.5 lb.



5395A

LARGE SNAPHOOKS



- Forged steel rated at a minimum of 5000 lb. and meeting the OSHA and ANSI standards.

- No. 5395A** 9" OAL 2 1/2" gate opening Wt. 2.0 lb.



3200



DSD30

ROPE DESCENT DEVICES

- No. 3200** Russ Anderson rescue "8" with ears for 7/16" and 1/2" rope OAL 6" Wt. 2.0 lb.
- No. DSD30** Skylotec double stop descender 11mm 7/16" static lines Wt. 2.06 lb.



CAUTION: This equipment is to be used by trained personnel only.

AERIAL SELF RESCUE EQUIPMENT

PARA-PAK

The Para-Pak is a self contained kit for emergency evacuation from an elevated work area.

The basic device consists of a 3/8" Aramid fiber line packed into a low profile cartridge. 75' of line stores in an 10" x 10" pouch less than 2" thick.

It's much smaller and weighs less than similar products that use 1/2" synthetic line. The thin profile and lightweight make this a very versatile and user friendly system.



PARA-PAK RESCUE KIT

- Combination of 683 harness, Para-Pak and lanyard.
- Requires the 683X Series harness to connect to the Para-Pak and a 6" back attachment point extension.
- The FR-Nomex Para-Pak includes a pre-rigged nylon ladder and clips to connect to the harness pad.
- Requires a lanyard that has a ring or loop for connecting to the rescue line.
- Can't be retrofitted on existing fall arrest harnesses or lanyards.

No. 683XC6	X-Style harness with 6" loop and D-Ring	Wt. 4.5 lb.
No. SR700XPL	Para-Pak with shoulder pad mounting system for harness	Wt. 2.5 lb.
No. SR2804-5.5HL	Lanyard with rescue ring	Wt. 2.5 lb.



EMERGENCY SELF EVACUATION FROM AN AERIAL LIFT

SR PACK

- Evacuation or rescue from an elevated work area.
- Lightweight and easy to carry.
- Weather resistant pouch and has a mechanical descent device that will stop if the control is released.
- A harness with a front attachment is required.

No. SRPACK-100AL	Rescue Pack (100 ft.)	Wt. 3.3 lb.
-------------------------	-----------------------	-------------



REST SERIES: RELIEF FOR SUSPENSION TRAUMA




ReST

REST - SUSPENSION TRAUMA DEVICE

- Designed to mitigate the debilitating and potentially fatal effects of suspension trauma.
- Ladder secures to the back attachment of the worker's harness for easy access and deployment.
- Easily deploys by pulling on yellow rung.

No. ReST Suspension trauma ladder Wt. 0.7 lb.

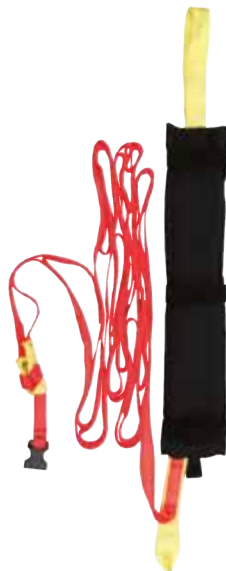

ReST-SR

REST SR - SUSPENSION TRAUMA RELIEF LADDER

- Self-deploying relief system.
- Ladder can provide the worker a means for either self-rescue, or at the very least a place to relieve the pressure on the leg as a result of hanging in the harness for an extended period of time after a fall event.
- Adjustable for use on 4' - 6' lanyards.
- Can be used on most lanyards.

No. ReST-SR Self-rescue ladder Wt. 1.2 lb.



ReSTEP



ReSTEP SUSPENSION TRAUMA DEVICE

- Simple and easy device designed to help minimize and alleviate the damaging and potentially fatal effects of suspension trauma when a worker is exposed to a fall event and left suspended in an upright position.
- Easily attaches to most harnesses.

No. ReSTEP Suspension trauma device Wt. 0.5 lb.

RESCUE EQUIPMENT



700FP



700FWI



700FWI (OPEN)

RESCUING INJURED WORKERS FROM AERIAL LIFT DEVICES

- Designed for use in aerial lift devices.
- 700FP attaches semi-permanently to the boom with a ratcheting boom strap.
- 700FWI is stored in a canister mounted directly on the truck body.
- Units feature corrosion resistant blocks with nylon sheaves and 75' of twisted rope. Other rope lengths are available on request.
- A carabiner is provided for attachment to the victim.
- Proper training is required to use these items.

No. 700FP	Boom mount rescue pack	Wt. 8.0 lb.
No. 700FWI	Truck mount rescue pack	Wt. 14.0 lb.



WRISTLETS

- Quick and easy way to move an injured worker.
- Nylon straps with 3" loops and soft felt padding.

No. 696NW	Wristlets	Wt. 0.5 lb.
------------------	-----------	-------------



FE700SRKSC

AERIAL LIFT-SELF RESCUE

- Designed for personal evacuation from a stranded aerial lift.
- 50' of 7/16" polydyne rope with an anchor eye spliced on one end, two carabiners, an DSD30 double stop descender and a carrying bag.
- Available as a boom-mount device.
- Proper training is required to use this item.
- Longer line is available.

No. FE700SRKSC	Aerial self rescue kit	Wt. 5.0 lb.
No. FE700BMSRSC	Boom mount rescue kit	Wt. 5.5 lb.

 Check out our website for a video on how to use the 700FP.



BAGS, BUCKETS, AND TOOL CARRIERS

Bashlin Industries, Inc. has a wide assortment of tool carriers for utility work. We fabricate them from canvas, nylon, and durable synthetics. They are designed for all sorts of job applications to make your work easier.

GEAR BAGS, BACK PACKS AND TOOL BAGS

BACK PACK SERIES

- Made from coated polyester and canvas materials.
- These durable and versatile gear bags offer the user plenty of room for storage of tools and gear.
- Available in yellow, black, orange, and camo.
- Features high visibility orange canvas liner.



11BPD-B



11BPD-C



11BPD-Y

11BPD BACK PACK DUFFLE

- Interior lined with high visibility orange material making what you're looking for easy to find.
- Draw string closure with buckles to secure top cover.
- Padded back with adjustable shoulder straps and rubberized handle.
- Front Pocket: 16" x 16" x 4".

No. 11BPD-B	Black, 26"H x 50"C (around)	Wt. 6.0 lb.
No. 11BPD-O	Orange, 26"H x 50"C (around)	Wt. 6.0 lb.
No. 11BPD-Y	Yellow, 26"H x 50"C (around)	Wt. 6.0 lb.
No. 11BPD-C	Camo, 26"H x 50"C (around)	Wt. 6.0 lb.



11BP-O

11BP TOP LOAD BACK PACK

- 3 exterior pockets (front: 12"x12"x4"/2 side: 16"x6"x3).
- Buckles secure top cover.
- Coated polyester with a hard plastic bottom.
- Padded back with adjustable shoulder straps and rubberized handle.

No. 11BP-B	Black, 16"W x 9" x 19"H	Wt. 6.0 lb.
No. 11BP-O	Orange, 16"W x 9" x 19"H	Wt. 6.0 lb.
No. 11BP-Y	Yellow, 16"W x 9" x 19"H	Wt. 6.0 lb.
No. 11BP-C	Camo, 16"W x 9" x 19"H	Wt. 6.0 lb.



11BPM-Y



11BPM-C

11BPM BACK PACK MINI

- Compact bag for PPE or any small load.
- Rubber handle.
- Padded adjustable straps.

No. 11BPM-B	Black, 18"H x 38"C (around)	Wt. 1.5 lb.
No. 11BPM-O	Orange, 18"H x 38"C (around)	Wt. 1.5 lb.
No. 11BPM-Y	Yellow, 18"H x 38"C (around)	Wt. 1.5 lb.
No. 11BPM-C	Camo, 18"H x 38"C (around)	Wt. 1.5 lb.



10S-14



10S-14TC

10S SERIES

- This durable bag is made of heavy canvas.
- Constructed with a steel frame, polyester web handles, and either a reinforced coated polyester bottom or hard plastic bottom.

No. 10S-14	Small bag with hard plastic bottom 14" x 10 x 7"	Wt. 4.0 lb.
No. 10S-14T-C	Small bag 14" x 15" x 7 with hard plastic bottom - camo	Wt. 4.25 lb.
No. 10S-18	Mid-size bag with coated polyester bottom 18" x 12" x 9"	Wt. 5.0 lb.
No. 10S-22	Medium bag with coated polyester bottom 22" x 12" x 7"	Wt. 5.75 lb.
No. 10S-24	Large bag hard plastic bottom 24" x 12" x 7"	Wt. 5.75 lb.

GEAR BAGS, BACK PACKS AND TOOL BAGS



11DCS



11DC SERIES

- Made of durable coated polyester.
- Nylon web handles.
- Hard plastic bottom and flap to cover the opening.
- The "S" model features a polyester web shoulder strap.

No. 11DC	24" x 19" x 11"	Wt. 8.0 lb.
No. 11DCS	With shoulder strap	Wt. 8.0 lb.



12S



12SC

12S SERIES

- This bag is made of canvas or coated polyester.
- It has a steel frame with polyester web handles and hard plastic bottom.
- Features inside and outside pockets.
- The "S" model features a polyester web shoulder strap.
- Also available in black, yellow, orange and camo.

No. 12S	22" x 13" x 11"	Wt. 8.0 lb.
No. 12SS	22" x 13" x 11" with shoulder strap	Wt. 9.0 lb.
No. 12SC	22" x 13" x 11" coated polyester	Wt. 8.0 lb.
No. 12SCS	22" x 13" x 11" coated polyester with shoulder strap	Wt. 9.0 lb.



DL11DC-RB-C



DL11DC-RB-O

DL11DC-RB SERIES: LARGE WHEEL "DRAG" BAG

- Has a hard plastic bottom and nylon web handles.
- Large 6" all terrain wheels.
- Features a flap to cover the opening when exposed to weather.
- Extendable handle.
- Available in black, yellow, orange and camo.

No. DL11DC-RB	24" x 19" x 11" bag on large wheels	Wt. 10.0 lb.
----------------------	--	--------------



DL11DC-R

DL11DC-R: ROLLER BAG

- Has a hard plastic bottom and nylon web handles.
- Features a flap to cover the opening when exposed to weather.
- Durable nylon wheels with an extendable handle.
- Available in black, yellow, orange and camo.

No. DL11DC-R	24" x 19" x 11" bag on wheels	Wt. 7.0 lb.
---------------------	-------------------------------	-------------



CUSTOM LOGOS AND MARKING

Contact customer service for more information about having your custom logo on our canvas and poly-coated products. There is no additional cost for making the product, simply a one time screen set up fee!

GLOVE/SLEEVE BAGS



LINEMEN'S SLEEVE BAGS

- Constructed from durable canvas or coated polyester.
- Hanging loop and attachment hook standard.
- Optional Snap button or Hook-N-Loop closure.

No. 24SL	Sleeve bag	Wt. 1.0 lb.
No. 24SLV	Hook-N-Loop closure sleeve bag	Wt. 1.0 lb.

LINEMEN'S GLOVE BAGS

- Best way to ensure proper protection of rubber gloves.
- Constructed from durable canvas or coated polyester.
- Features a snap button closure and an attachment hook.
- Includes drain holes in the bottom.
- Available with a bellows opening which is wider at the top for easier storage.
- Two pocket bags are good for keeping high voltage and low voltage gloves separate.
- Add "C" to part number for coated bags.

No. 24M	Standard opening (10 1/2" gloves)	Wt. 0.5 lb.
No. 24	Standard opening (14" gloves)	Wt. 0.7 lb.
No. 24B	Bellows opening (14" gloves)	Wt. 0.7 lb.
No. 24L	Standard opening (16" gloves)	Wt. 0.7 lb.
No. 24LB	Bellows opening (16" gloves)	Wt. 0.8 lb.
No. 24XL	Standard opening (18" gloves)	Wt. 0.8 lb.
No. 24XLB	Bellows opening (18" gloves)	Wt. 0.8 lb.
No. 24L2P	2 pocket glove bag (16" gloves)	Wt. 1.10 lb.
No. 24XL2P	2 pocket glove bag (18" gloves)	Wt. 1.10 lb.



GLOVE/SLEEVE BAGS

- Standard size sleeve bag combined with the glove bag.
- Available in coated polyester.
- Add "C" to part number for coated bags
- Add a pocket for safety glasses by including "GP" in the part number.

No. 24SLGP-15	For 14" rubber gloves	Wt. 1.5 lb.
No. 24SLGP-17	For 16" rubber gloves	Wt. 1.6 lb.
No. 24SLGP-19	For 18" rubber gloves	Wt. 1.70 lb.

BLANKET BAGS, ROLLS, CANISTERS



24RBR-38



24RBR-38

BLANKET ROLLS

- Easy way to store and carry rubber blankets.
- Constructed from durable canvas with four blanket capacity.
- Features nylon snap closures and a nylon web carrying handle.

No. 24RBR-38	For 36" blankets	Wt. 1.5 lb.
No. 24RBR-47	For 46" blankets	Wt. 2.0 lb.



24RBC-38

BLANKET BAGS

- Blanket bags are made of heavy duty coated polyester. They have reinforced seams for added durability.

No. 24RBC-38	For 36" blankets	Wt. 1.10 lb.
No. 24RBC-47	For 46" blankets	Wt. 1.5 lb.



BC136-2 BC136-3 BC136-4

BLANKET CANISTERS

- Blanket canisters make storage easy while providing mechanical and contamination protection.
- Made of high impact polyethylene.

No. BC136-2	5" x 37" (capacity: 2)	Wt. 2.5 lb.
No. BC136-3	6" x 37" (capacity: 3)	Wt. 2.75 lb.
No. BC136-4	7" x 37" (capacity: 4)	Wt. 3.25 lb.
No. BC136-6	9" x 37" (capacity: 6)	Wt. 4.75 lb.



208-42 212-48

LINE HOSE BAGS

- Cotton bags that make handling and storage of line hose easier.
- Reinforced tops, and leather bottoms.

No. 208-30	8" x 30"	Wt. 2.0 lb.
No. 208-42	8" x 42"	Wt. 2.5 lb.
No. 208-48	8" x 48"	Wt. 3.0 lb.
No. 208-60	8" x 60"	Wt. 3.5 lb.
No. 210-30	10" x 30"	Wt. 3.0 lb.
No. 210-42	10" x 42"	Wt. 3.5 lb.
No. 210-48	10" x 48"	Wt. 4.0 lb.
No. 210-60	10" x 60"	Wt. 4.5 lb.
No. 212-30	12" x 30"	Wt. 3.5 lb.
No. 212-42	12" x 42"	Wt. 4.0 lb.
No. 212-48	12" x 48"	Wt. 4.5 lb.
No. 212-60	12" x 60"	Wt. 5.0 lb.

HOT STICK, GROUND SET BAGS



24HCS



270B

HOT STICK BAGS

- Protective bags that are made from coated polyester material and feature a snap button closure.
- Order according to the length of the stick and size as indicated with the stick description.

No. 24HSC-30	30" hot stick bag	Wt. 1.5 lb.
No. 24HSC-45	45" hot stick bag	Wt. 2.0 lb.
No. 24HSC-60	60" hot stick bag	Wt. 1.5 lb.
No. 24HSC-65	65" hot stick bag	Wt. 2.0 lb.
No. 24HSC-75	75" hot stick bag	Wt. 1.5 lb.
No. 24HSC-80	80" hot stick bag	Wt. 2.0 lb.
No. 24HSC-100	100" hot stick bag	Wt. 1.5 lb.
No. 24HSC-125	125" hot stick bag	Wt. 2.0 lb.
No. 24HSC-130	130" hot stick bag	Wt. 1.5 lb.
No. 270B	Rescue stick bag for #270	Wt. 2.0 lb.
No. 1967B	Bag for 1967RCP	Wt. 1.5 lb.

GROUND SET BAGS

- Bashlin's ground set bags are an easy way to store and carry grounding equipment.



217

COATED POLYESTER BAG

- Extra heavy bag is made of coated polyester material.
- It has web handles and a Hook-N-Loop closure.

No. 217 28 1/2" x 25 1/2" Wt. 1.5 lb.



10S-14

10S SERIES

- This durable bag is made of heavy canvas.
- Includes a steel frame, polyester web handles and hard plastic bottom.

No. 10S-14 Small bag with hard plastic bottom 14" x 10 x 7" Wt. 4.0 lb.

No. 10S-24 Large bag hard plastic bottom 24" x 12" x 7" Wt. 5.75 lb.

TOOL BUCKETS, HARNESS AND TOOL BAGS



TOOL BUCKETS

- Bashlin tool buckets are made of the highest quality materials for long life.
- Available in canvas or coated polyester and feature leather or plastic bottoms.
- Inside pockets are standard on the 23 series buckets.
- 'LS' series buckets have no snaps.
- Add "C" for coated bags.

LEATHER BOTTOM:

No. 18	8" x 12"	Wt. 1.5 lb.
No. 18LS	8" x 12" - no snap	Wt. 1.25 lb.
No. 23	12" x 16"	Wt. 3.75 lb.
No. 23LS	12" x 16" - no snap	Wt. 3.5 lb.

PLASTIC BOTTOM:

No. 18P	8" x 12"	Wt. 1.5 lb.
No. 18P-0	8" x 12", orange	Wt. 1.5 lb.
No. 18LSP	8" x 12" - no snap	Wt. 1.25 lb.
No. 23P	12" x 16"	Wt. 3.75 lb.
No. 23LSP	12" x 16" - no snap	Wt. 3.5 lb.

700 SERIES: AERIAL BAGS

- Non-conductive frame to keep the bag open.
- Reinforced bottom.
- Ten inside pockets for tools.
- 14" x 7" x 10.

No. 706	Tool bag with PVC hooks	Wt. 3.0 lb.
No. 706S	Tool bag with rope and snap	Wt. 3.0 lb.



717 SPLICER'S TOOL BAG

- Non-conductive frame to keep the bag open.
- Tool pockets inside and 14 outside pockets.
- Reinforced bottom.

No. 717	14 1/2" x 7" x 9 1/2"	Wt. 3.0 lb.
----------------	-----------------------	-------------

AERIAL TOOL BAGS AND TOOL CARRIERS



706-20

706-20

- 20" deep and has 10 inside pockets.
- Includes 712 hooks.

No. 706-20

14" x 7" x 20"

Wt. 3.25 lb.



721AM



722AM

TOOL BUCKET/BAG FOR "SHOOT ON" CONNECTORS

- Bashlin manufactures both a tool bucket and a bag for the "shoot on" connectors.
- Ample storage for the cartridges, the tool, as well as the connectors and wedges.
- Includes 712 hooks for hanging in bucket.
- The bucket includes a snap on the rope.
- Available in canvas or coated polyester.

No. 721AM

Tool bag (8" x 12", polyester) Wt. 2.0 lb.

No. 722AM

Tool bucket (8" x 12", polyester) Wt. 2.5 lb.

No. 723AM

Tool bucket (8" x 12", canvas) Wt. 2.0 lb.



726

COMPRESSION TOOL AND CUTTER BAG

- Three pocket coated polyester bag.
- Two pockets are for compression tools, one is for bolt cutters.
- Two PVC hooks are included.

No. 726

12" x 20"

Wt. 3.5 lb.



10HB

HARNESS BAGS

- Store and protect your body harness from most mechanical, chemical and UV damage in this high visibility orange canvas bag.

No. 10HB

Harness bag

Wt. 1.0 lb.

TOOL BOARDS

TOOL CARRIERS

Bashlin's tool boards are made of ABS. This light, durable material does not fray or flake and has superior cold weather characteristics. These boards are built and arranged with the worker in mind. They save precious space in the bucket and keep the tools in a handy position.



708



708L

HAMMER/HAND TOOLS/ BOLTS AND NUTS

- This is our original tool board. It remains a popular design with many utilities.
- 18" x 20".
- Features a 4 pocket tool holster, knife sheath, tool loops, and leather or canvas nut and bolt bag.

No. 708 With 25B bag Wt. 6.25 lb.
No. 708L With 26L bag Wt. 7.0 lb.



708S

HAND TOOLS/PRUNING SAW/ BOLT CUTTER

- A pruning saw, more tools and cutter can be easily carried on this board.
- The #26R canvas bag has extra reinforcement for extended wear.
- 18" x 20".

No. 708S With 26R bag Wt. 8.5 lb.



708-2

COMPRESSION TOOL/BITS/ HAND TOOLS

- This board holds a variety of most often used tools.
- Holds speed wrenches, hammers, compression tools, and a light.
- 18" x 20".

No. 708-2 With 726 and 25B bags Wt. 7.0 lb.



708ID

HAND TOOLS/DRIVERS

- This aerial lift tool board complements our popular 708 Tool Board Series.
- Designed by Niagara Mohawk, it is perfect for aerial lifts that use an impact driver and need a convenient socket holder.
- Carries 6, 1/2" drive sockets on the tool board. It firmly holds the sockets with extra long socket stems that can accommodate all deep well sockets.

No. 708ID With 25B Bag Wt. 14.0 lb.

TOOL BOARD/TOOL TRAY



708G

708G

- Includes spaces for drill bits, drivers, and the Lowell wrench.
- 18" x 20".

No. 708G Tool board with 26L bag Wt. 12.0 lb.



708B

BLANK TOOL BOARD

- Blank ABS tool boards allowing you to customize a tool board to suit your needs.
- 18" x 20".

No. 708B Blank tool board Wt. 4.0 lb.



724

TOOL APRON

- Made from yellow heavyweight coated nylon.
- It has socket pockets, 2 pockets for auger bits, a hammer loop, and 2 large pockets for bolts, nuts and connectors.
- 2 PVC hooks are included.
- 23 7/8" x 21 1/4"

No. 724 Tool apron Wt. 5.0 lb.



727L

TOOL TRAY

- This tool tray features an adjustable mount and smooth molded construction.
- 6" x 14" x 7 1/2".

No. 727L Tool tray Wt. 8.0 lb.



712

712-2

712-3



712P-2

712P-3

HOOKS

- PVC and polymer hooks for hanging bags and tool aprons.

No. 712	PVC-3" buckets PVC	Wt. 0.21 lb.
No. 712-2	PVC-standard buckets	Wt. 0.21 lb.
No. 712-3	PVC-3" lip buckets	Wt. 0.21 lb.
No. 712P	Polymer-standard buckets	Wt. 0.31 lb.
No. 712P-3	Polymer-3" lip buckets	Wt. 0.31 lb.



700BK

BUCKET KNUCKLE


- Tool holding and organization bracket designed to suspend and separate tools inside an aerial device.
- Durable UHMW plastic.
- Measures 19 3/4" x 3" x 2 1/2".
- Hang from two standard bucket hooks (not included).
- Made in USA.

No. 700BK Bucket knuckle Wt. 1.5 lb.

SAFETY HOOK/BUCKET COVER



BSH20

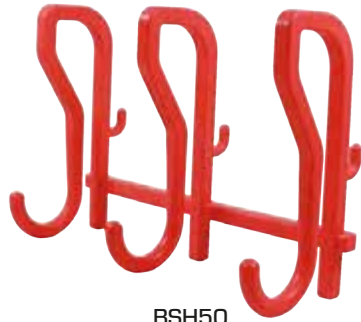

BSH50

SAFETY HOOK

- Rugged hook with a break strength in excess of 250 lb.
- It will safely replace many hooks formed from #8 copper hanging on line trucks everywhere.

No. BSH20	Double hook	Wt. 0.6 lb.
No. BSH50	Single bar with 3 double hooks	Wt. 1.5 lb.



745



744

REINFORCED BUCKET COVER

- Rugged coated polyester with or without foam insert.
- Designed for 24" x 24" bucket.
- Rope and snap hook to help secure to bucket.

No. 744	Soft bucket cover	Wt. 4.4 lb.
No. 745	Reinforced bucket cover	Wt. 6.7 lb.



731CS

CHAIN SAW HOLDER

- This tool holder hangs on the outside of the bucket and will hold cutters, compression tools and/or a chain saw.
- Made of ABS plastic.
- Durable in all temperature ranges.

No. 731CS	Tool holder	Wt. 5.0 lb.
------------------	-------------	-------------





LINE VEHICLE EQUIPMENT AND CONSTRUCTION TOOLS

Bashlin Industries, Inc. makes and sells quality tools and equipment for the professional lineworker. This includes slings, winchlines, payout reels, hot sticks, and more.

We specialize in the hard-to-find equipment unique to this market.

SLINGS/POLE SLINGS

NYLON SLINGS

- Rugged 950 Series orange nylon slings are made for the utility industry and to current ANSI standards.
- Standard length is 3 feet.
- Other lengths available upon request.



950-100



950-300

ENDLESS SLINGS

LOAD RATING LBS.

	WIDTH	VERTICAL	CHOKER	BASKET
No. 950-100	1"	3200	2560	6400
No. 950-100D	1" DT	6200	4960	12400
No. 950-175	1 3/4"	4000	3200	8000
No. 950-175D	1 3/4" DT	8800	7040	17600
No. 950-200	2"	5600	4480	11200
No. 950-200D	2" DT	12200	9760	24400
No. 950-300	3"	8000	6400	16000
No. 950-300D	3" DT	15200	12160	30400



951-100



951-175



951-200

DOUBLE EYE STANDARD

LOAD RATING LBS.

	WIDTH	VERTICAL	CHOKER	BASKET
No. 951-100	1"	3200	2560	6400
No. 951-175	1 3/4"	5400	4320	10800
No. 951-200	2"	6400	5120	12800
No. 951-300-4	3"	7800	6240	15600



WARNING: Always inspect slings before use. Heavily abraded, burned, or cut slings should be removed from service.



Contact customer service for abrasion resistance wear pads or custom slings.

DOUBLE EYE SINGLE PLY

LOAD RATING LBS.

	WIDTH	VERTICAL	CHOKER	BASKET
No. 952-100	1"	1600	1280	3200
No. 952-175	1 3/4"	2800	2240	5600
No. 952-200	2"	3200	2560	6400
No. 952-300-4	3"	4200	3360	8400



953-200

RETURN EYE

LOAD RATING LBS.

	WIDTH	VERTICAL	CHOKER	BASKET
No. 953-200	2"	5600	4480	11200
No. 953-350	3 1/2"	7600	6080	15200

GRIP SLINGS

- Rubber belting sewn onto the fabric to reduce slippage.
- 1 3/4" nylon slings are available with or without 5000 lb. test O-Ring.
- The 4" soft eyes have ballistic nylon wear sleeves.



2011SE-52G

LOAD RATING LBS.

	VERTICAL	CHOKER	BASKET
No. 2011SE-52G 52" with steel ring	2500	2500	5000
No. 2011SE-72G 72" with steel ring	2500	2500	5000
No. 2012SE-52G 52" with 2 soft eyes	3300	2640	6600
No. 2012SE-72G 72" with 2 soft eyes	3300	2640	6600

POLE SLINGS

- Pole slings are available with (2011) or without (2012) hardware. The 2011 is designed for easy use with a shotgun stick.



2011-36

LOAD RATING LBS.

	WIDTH	VERTICAL	CHOKER	BASKET	WT.
No. 2011-36	1 3/4"	1000	1000	2000	1.75 lb.
No. 2011-48	1 3/4"	1000	1000	2000	1.75 lb.
No. 2012-36	1 3/4"	3300	2640	6600	0.7 lb.
No. 2012-48	1 3/4"	3300	2640	6600	0.7 lb.

ROPE SLINGS/AUGER SLINGS

YALE ADJUSTABLE ROPE SLINGS

- Whoopee slings make awkward lifts much easier. They are available in Polyale Plus™ or Yalex™ rope.



		LOAD RATING LBS.		
		VERTICAL	CHOKER	BASKET
No. 960P	1/2" Polyale Plus™			
	Adj. 28" - 48"	1496	1197	2992
No. 960Y	5/8" Yalex™			
	Adj. 32" - 60"	3203	2562	6406
No. 960YL	5/8" Yalex™			
	Adj. 32" - 96"	3203	2562	6406



- The double leg adjustable rope sling features a center lifter point, with a protective cover and adjustment on both legs.
- Available in either 1/2" Polyale Plus™ or 5/8" Yalex™ rope, and is ideal for hanging transformers.

		LOAD RATING LBS.		
		VERTICAL	CHOKER	BASKET
No. 962P	1/2" Polyale Plus™			
	Adj. 30" - 50"	1496	1197	2992
No. 962Y	5/8" Yalex™			
	Adj. 30" - 50"	3203	2562	6406



- For pad mount transformers, we have the four legged sling. Each leg adjusts individually for quick rigging.

		LEG LENGTH	LOAD RATING
No. 965P	1/2" Polyale Plus™	4' - 5'	4550 lb.
No. 965Y	5/8" Yalex™	5' - 7'	12820 lb.
No. 965YL	5/8" Yalex™	6' - 8'	12820 lb.
No. 965V	5/8" Vectrus™	5' - 7'	32010 lb.

FIXED LENGTH ROPE SLINGS

- Rope slings are made from 5/8" Yalex™ rope. The standard length is 3' for the endless, 4' for double eye.



		LOAD RATING LBS.		
		VERTICAL	CHOKER	BASKET
No. 4950-58Y	5/8" endless sling	6188	4950	12376
No. 4951-58Y	5/8" double eye std.	3640	2912	7280



AUGER WIND UPS

- Strong, light-weight featuring reinforced eyes.
- Standard length is 10' (other lengths are available).

No. 770W	1" x 10' nylon web	Wt. 1.15 lb.
No. 770R	5/8" x 10' Yalex™	Wt. 2.0 lb.
No. 770RDE	1" x 10' double esterlon	Wt. 4.0 lb.



962NWTs

962NWTs: ADJUSTABLE NYLON TRANSFORMER SLING

- 1,000 lb. load rating.
- Features large rings to fit over the lifting hooks.

No. 962NWTs	Adjustable nylon transformer sling	Wt. 1.6 lb.
--------------------	------------------------------------	-------------

HANDLINES AND SLACK BLOCKS



940



945



945T

HANDLINES

- 1/2" Polyale Plus™ braided rope is the standard rope for all 940 series handlines. It is easily spliced and resists rotation under load.
- Standard 940 includes 500 lb. SWL 35H drop forged alloy steel handline hook, SL6650A steel double locking snaphook, 75' of rope, and premium block.
- 940R comes with a 35H hook, 75' of rope, and steel snaphook.

No. 940	Complete handline assembly 500 lb. SWL*	Wt. 8.75 lb.
No. 940R	Rope only with 35H hook and snaphook - 500lb. SWL*	Wt. 6.75 lb.
No. 940HD10	Aluminum hook and aluminum snaphook - 1000 lb. SWL*	Wt. 9.0 lb.

*SWL - Safe Working Load.



940HD10

SLACK BLOCK ASSEMBLY

- Slack blocks come with 30' of 3/8" Polyale Plus™ or polyester twist rope.
- "H" series features extended hooks.
- The maximum safe working load is 750 lb. SWL*

No. 945	Polyale Plus™	Wt. 4.25 lb.
No. 945H	Polyale Plus™ with extended hooks	Wt. 4.25 lb.
No. 945T	Poly-Twist	Wt. 4.25 lb.
No. 945HT	Poly-Twist with extended hooks	Wt. 4.25 lb.



PARTS FOR HANDLINES

No. 33	Handline carrier	Wt. 0.1 lb.
No. 33L	Locking handline carrier	Wt. 0.1 lb.
No. 35H	Handline hook - 500 lb. SWL*	Wt. 0.75 lb.
No. 35GP	Double hook - 100lb. SWL*	Wt. 0.6 lb.
No. DNHLH5	Aluminum hook -1000 lb. SWL*	Wt. 0.7 lb.
No. 3550	Handline block	Wt. 2.0 lb.

*SWL - Safe Working Load.



For handlines longer than 75' contact customer service

WINCH LINES/PULLING LINES



WINCH LINES

Bashlin will fabricate replacement winch lines for your material handling and digger trucks. Our splicers are certified by Yale Cordage annually and can manufacture to your specifications. Call us for pricing and delivery.

Ask about our winch line maintenance program.




DOUBLE ESTERLON WINCH LINES

- Yale Double Esterlon is low stretch, high strength rope with excellent dielectric properties.
- Maxijacket coating on the end provides abrasion resistance where you need it.
- Color coded coatings can make it easy to determine when it is time to replace your lines.
- 1/2" and 1" Double Esterlon available.

No. 750DE12W08 1/2" Double Esterlon winchline with 8' of Maxijacket coating. Average breaking strength 10,500 - 2,625 lb. working load (4/1) 8.1 lb. per 100'

No. 750DE10W08 1" Double Esterlon Winchline with 8' of Maxijacket coating. Average breaking strength 44,000 - 11,000 lb. working load (4/1) 35.2 lb. per 100'

 Spools, shields, and shackles are available for your winch lines. Call for a quote.

MAXIBRAID PLUS WINCH LINES

- Maxibraid Plus™ is a double braided rope constructed of an inner load bearing core of UHMPE that is very strong with very little stretch. UHMPE has the highest strength to weight ratio of any high modulus fiber.
- The core is coated with Maxijacket™ coating then a polyester jacket is overbraided for a long wearing extra strong line.

No. 750MP12W0 1/2" Maxibraid Plus™ winchline with Maxijacket™ coating. Average breaking strength 20,000 - 4,000 lb. working load (5/1) 7.3 lb. per 100'.

No. 750MP78W0 7/8" Maxibraid Plus™ winchline with Maxijacket™ coating. Average breaking strength 50,000 - 10,000 lb. working load (5/1) 23.2 lb. per 100'.

We can repair your worn and damaged lines when possible.



PULLING LINES INCLUDING PILOT LINES AND SPIDER LINES

- We recommend Yalex™ for all your stringing applications. Yalex™ is a single braid 12 strand polyester rope coated with Maxijacket™ for abrasion resistance. It is easy to splice, and is the strongest Yale polyester product.
- Call for part number, pricing and delivery.



PULLING GRIPS AND HOISTS



1685-20



1671-10

KLEIN PARALLEL JAW GRIPS

- The Klein parallel jaw grips have longer jaws for less slippage and conductor damage.

	MIN. CABLE	MAX. CABLE	SAFELOAD	WT.
No. 1686-10	.20	.40	10,000 lb.	5.0 lb.
No. 1686-20	.20	.40	10,000 lb.	5.0 lb.
No. 1671-10	.37	.75	10,000 lb.	5.0 lb.
No. 1672-10	.37	.75	10,000 lb.	5.0 lb.
No. 1685-20	.157	.844	4,500 lb.	3.0 lb.
No. 1685-31	.625	1.25	6,600 lb.	5.0 lb.



LMG4500



LMG4501

LITTLE MULE GRIPS


- These parallel jaw grips resist jamming and will release instantly. The design reduces cable damage.

STANDARD GRIPS:

	MIN. CABLE	MAX. CABLE	SAFELOAD	JAWS	WT.
No. LMG1000	.04	.394	1,000 lb.	Serrated	0.5 lb.
No. LMG2000	.109	.594	2,000 lb.	Serrated	1.0 lb.
No. LMG4500	.18	.60	5,000 lb.	Serrated	3.75 lb.
No. LMG4600	.30	.80	10,000 lb.	Serrated	6.50 lb.
No. LMG4800	.70	1.25	12,000 lb.	Serrated	9.0 lb.

HOT LINE GRIPS:

	MIN. CABLE	MAX. CABLE	SAFELOAD	JAWS	WT.
No. LMG4501	.18	.60	5,000 lb.	Serrated	4.0 lb.
No. LMG4601	.30	.80	10,000 lb.	Serrated	7.0 lb.
No. LMG4801	.70	1.25	12,000 lb.	Serrated	9.0 lb.

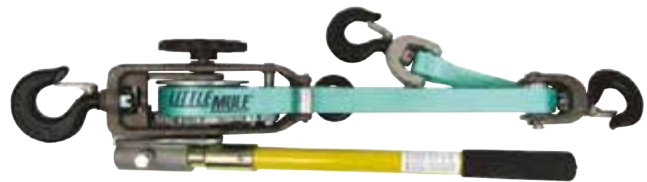

300A

LITTLE MULE STRAP HOIST

- The 300 Series hoists are designed for line work. They are light, easy to handle, and rugged. All of the working parts are exposed for easy field repair.

	SINGLE LINE CAPACITY	SINGLE LINE LIFT LENGTH	DOUBLE LINE CAPACITY	DOUBLE LINE LENGTH	WT.
No. 300A	1,500 lb.	9'	3,000 lb.	4.5'	10.5 lb.
No. 300DA	1,500 lb.	9'	3,000 lb.	4.5'	11.0 lb.



PA2000

CM TORNADO CHAIN HOIST

- Racheting chain hoist with swivel hooks.

	SINGLE LINE CAPACITY	SINGLE LINE LIFT LENGTH	WT.
No. PA2000	3,000 lb.	5	21.1 lb.



903LT


903LT: LIF-T

- Great for pad mount transformers.
- 5/8" grade 8 construction with handle.
- Orange corrosion resistant powder coating.
- Sold as a pair.
- 1,000 lb. capacity.

No. 903LT: LIF-T Lifting T

Wt. 0.5 lb.

CROSS ARM IRON, PAY-OUT REELS AND GROUND ROD DRIVERS

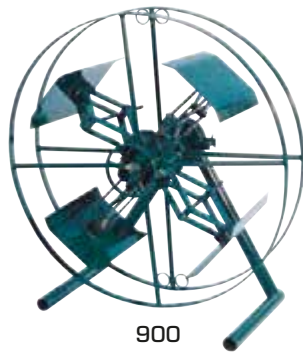

900



900X



902

PAY-OUT REELS

- Fully adjustable, all purpose device for use on trucks or as a portable pay-out reel.
- Works on many different coil sizes.
- Standard grease fitting provides full lubrication.
- Adjustable brake maintains line tension.
- 900-900X coil capacity.
- Diameter: 14" (minimum) - 32" (maximum)
- Width: 6" (minimum) - 11" (maximum)

	HEIGHT	WIDTH	DEPTH	WT.	SHIP WT.
No. 900	40"	37"	19"	145 lb.	175.0 lb.
No. 900S	35"	32"	19"	95 lb.	120.0 lb.
No. 900X	45"	37"	19"	165 lb.	180.0 lb.

WIRE BASKET

- Lightweight, compact wire dispenser that will accommodate reels up to 26" x 4 1/4".
- Features a hanger for easy mounting on a truck and an eyelet for temporary pole attachment.

No. 902	Wire basket	Wt. 11.0 lb.
No. 902-30	30" wire basket	Wt. 12.0 lb.



901LF



901TI

CROSS ARM IRON

- Here is an easier way to rig for lifting a transformer (901LF), or sagging a line (901TI). These versatile anchors can be placed in position with a hot stick even if pre-rigged. The load rating is 500 lb.

No. 901LF	Cross arm iron	Wt. 3.5 lb.
No. 901TI	Cross arm iron II	Wt. 3.5 lb.



930



930UT

GROUND ROD DRIVER

- Designed to ease the chore of driving ground rods.
- Compact, safe, easy to handle and store.
- Enables a workman to drive an 8' rod while standing on the ground.
- The 930UT features hand guards.
- 1/2", 5/8" and 3/4" ground rods.

No. 930	Ground rod driver	Wt. 20.0 lb.
No. 930UT	Ground rod driver with hand guard	Wt. 24.0 lb.

CUTTERS AND URD DISCONNECT TOOL

Porter ratchet cutters use the combination ratchet and chain for smooth, progressive cuts. The handles are insulated and factory tested. Parts are available for field repairs.



8690FH

8690FH

- A 29 1/4" cutter for shearing cuts on ACSR and common steel.

No. **8690FH** 13/16" jaw opening Wt. 12.25 lb.



8690CK

8690CK

- A rugged 28", extra-duty cutter for EHS guy strand. The jaws hold the wire for square, clean cuts.

No. **8690CK** 7/16" jaw opening Wt. 11.0 lb.



BC18F




BC24F

CUTTERS WITH FIBERGLASS HANDLES

- Handles are tested to 100kv per foot.

No. **BC18F** 18" length, 3/8" capacity Wt. 4.5 lb.

No. **BC24F** 24" length, 7/16" capacity Wt. 4.5 lb.

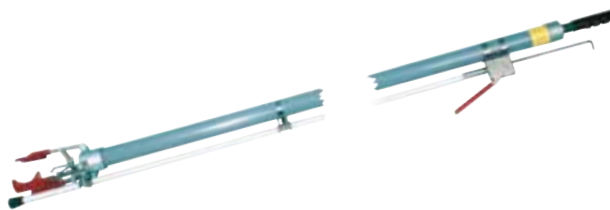

RJL1967RCP

URD DISCONNECT TOOL

- Original LeVesque URD disconnect featuring three jaw operation and a pusher rod for smooth disconnects. It is done with a minimum of strain and chafing on the semi-conductor. It tests at 100 kV per foot.
- The standard length is 5'. Other lengths are available on request.


No. **RJL1967RCP** Tool Wt. 10.5 lb.

No. **1967B** Carrying case Wt. 1.25 lb.

SWITCH STICKS AND SHOTGUN STICKS

HASTINGS HOT STICKS

- Recognizable by their bright yellow color, they are the finest insulated tools available to the professional lineman.

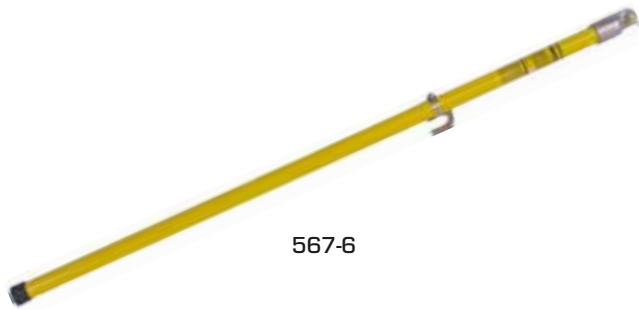

567-6

TELESCOPING SWITCH STICKS

- Hastings Tel-O-Pole sticks feature the easy to hold sure lock triangle shape
- Fluorescent green tip section with foam core



HV208

FIXED LENGTH UNIVERSAL HEAD SWITCH STICKS

- These fixed length sticks have a universal head for use with most hot stick accessories.
- Stick Hanger is included.

No. 567-6	6' length	Wt. 1.4 lb.
No. 567-8	8' length	Wt. 2.6 lb.
No. 567-10	10' length	Wt. 3.3 lb.
No. 567-12	12' length	Wt. 4.0 lb.

STANDARD DUTY TEL-O-POLE II

- The "No Twist" stick.

	EXTENDED LENGTH	RETRACTED LENGTH	WT.
No. HV208	8'	26"	3.0 lb.
No. HV212	12' - 7"	58"	3.7 lb.
No. HV225	25' - 6"	64"	8.1 lb.
No. HV230	30'	66"	10.0 lb.
No. HV235	35'	68"	12.1 lb.



1901-6



UNIVERSAL OPTION

BOTTOM BREAK HOOK OPTION



SH216

HEAVY DUTY TEL-O-POLE

	EXTENDED LENGTH	RETRACTED LENGTH	WT.
No. SH216	9' - 13' - 17'	58 1/8"	4.8 lb.
No. SH200	13' - 17.5' - 21.5'	60"	6.57 lb.
No. SH230	13'-17.5'-21.5'-26'-30'	63 3/8"	10.3 lb.

SHOTGUN STICKS

- Shotgun sticks with eternal operating rods, hanger hook, and end caps.

No. 1901-6	6' - 6" length	Wt. 4.5 lb.
No. 1901-10	10' - 6" length	Wt. 7.2 lb.



Hot Stick accessories available upon request. Sticks over 5' will be shipped via motor freight. Other length sticks available upon request.

ELECTRICIAN'S/INSTALLERS HOLSTERS, AND BELTS

HOLSTERS

Bashlin holsters put your tools where you want them, within easy reach. They are designed with the worker in mind and made with only the highest quality leathers and the finest craftsmanship.

These holsters are not for use on linemen's tool belts.



111YS



111YSX

111YS

- Sturdy holster with a harness leather back.

No. 111YS 9 1/4" x 10 1/2" Wt. 1.25 lb.
No. 111YSX 9 1/4" x 10 1/2" - black Wt. 1.25 lb.



111JBS



111JBSX

111JBS

- Built from select leathers and is made to last.

No. 111JBS 8 1/2" x 9" x 4" Wt. 1.25 lb.
No. 111JBSX 8 1/2" x 9" x 4" - black Wt. 1.25 lb.



111JLMS



111JLMSX

111JLMS

- If you are carrying a lot of tools, this may be the holster you need. It is our largest multipurpose holster.

No. 111JLMS 12" x 9" x 4 3/4" Wt. 2.0 lb.
No. 111JLMSX 12" x 9" x 4 3/4" - black Wt. 2.0 lb.



112HLS



112HLSX

112HLS

- Harness leather backed groundman's holster for pliers, rule, screwdriver, and Channellock®.

No. 112HLS 7 1/2" x 12" Wt. 1.0 lb.
No. 112HLSX 7 1/2" x 12" - black Wt. 1.0 lb.



112CIL



112CILX

112CIL

- Large cable installer with extra pockets.

No. 112CIL 8" x 12" Wt. 1.0 lb.
No. 112CILX 8" x 12" - black Wt. 1.0 lb.



625

630

628

ELECTRICIAN'S BELTS

- Add "X" to part number for black.
- Specify a size.

No. 625 1 3/4" russet leather utility belt Wt. 1.0 lb.
No. 628 1 3/4" electrician's belt will carry a hammer, tape, and a knife with the holster Wt. 1.0 lb.
No. 630 Heavy duty 2" belt with a double tongue buckle. Wt. 1.25 lb.



ELECTRICAL PERSONAL PROTECTIVE EQUIPMENT

Bashlin Industries, Inc. has been a major supplier of electrical personal protective equipment for many years. We offer rubber gloves, protectors, blankets, line hose and all of the accessories. We can also help you out with your special needs. Just give us a call.

LINEMEN'S RUBBER GLOVES

High quality, natural rubber type I gloves have textured inside surface, "curved hand" comfort and flexibility.

WHEN PURCHASING LINEMEN'S GLOVES, PLEASE CONSIDER:



ONE FINGER
MITTEN

STANDARD

LOW VOLTAGE

STYLE:

- Available in standard, bell cuff, one finger mittens and special order glove.



GLOVE LENGTH:

- **CLASS 00, 0:** 10 1/2", 14"
- **CLASS 1, 2:** 14", 16", 18"
- **CLASS 3:** 16", 18"
- **CLASS 4:** 18"

VOLTAGE RATING:

CLASS	LABEL	COLOR	MAXIMUM USAGE	AC TEST VOLTAGE
00	Beige		500v	2,500v
0	Red		1,000v	5,000v
1	White		7,500v	10,000v
2	Yellow		17,500v	20,000v
3	Green		26,500v	30,000v
4	Orange		36,000v	40,000v

🔍 DID YOU KNOW?

OUR GLOVES ARE 100% TESTED FOR VISUAL FLAWS AND IMPERFECTIONS, AND ARE ELECTRICALLY TESTED PER ASTM STANDARDS. IF REQUESTED, IN SERVICE DATING CAN BE MARKED ON THE GLOVES. CERTIFIED THIRD PARTY TESTING BY A NAIL CERTIFIED LAB IS AVAILABLE ON REQUEST.



COLORS:

- Manufactured in solid colors or two contrasting colors for easier inspection. The lighter color is inside and the black is on the outside. Two color gloves are normally Class 1 and higher.

SIZE:

- Sized according to the circumference of the hand below the base of the fingers, on a line parallel to the base of the finger crotches, passing through the thumb crotch. Add 1" to the measurement for the proper size.



ORDER NUMBER/SPECIFICATIONS:

	MAX. USAGE	CLASS	AC TEST VOLTAGE	COLOR	SIZE
No. 1100Y	500v	00	2,500	Yellow	10 1/2"
No. 110Y	1,000v	0	5,000	Yellow	10 1/2"
No. 140Y	1,000v	0	5,000	Yellow	14"
No. 14-10B	7,500v	1	10,000	Black	14"
No. 14-20B	17,000v	2	20,000	Black	14"
No. 16-20B	17,000v	2	20,000	Black	16"
No. 18-20B	17,000v	2	20,000	Black	18"
No. 14-20YB	17,000v	2	20,000	Yellow/Black	14"
No. 16-20YB	17,000v	2	20,000	Yellow/Black	16"
No. 18-20YB	17,000v	2	20,000	Yellow/Black	18"
No. 16-30YB	26,500v	3	30,000	Yellow/Black	16"
No. 18-30YB	26,500v	3	30,000	Yellow/Black	18"
No. 18-40B	36,000v	4	40,000	Black	18"
No. 18-40YB	36,000v	4	40,000	Black	18"

LEATHER PROTECTOR GLOVES AND LINERS



1050

1057



1200

910/999

KUNZ LEATHER PROTECTOR GLOVES

- Bashlin offers the Kunz protectors for primary (high voltage) and secondary (low voltage) linemen's gloves.
- Made in the U.S.A. Bashlin offers the following protectors:
 - **1050 Series:** cream cowhide (primary)
 - **1057 Series:** bucktan cowhide (primary)
 - **1200 Series:** goatskin (primary)
 - **999 Series:** goatskin (secondary)
 - **910 Series:** goatskin (class 00)
- Made from 2.75 to 3.5 oz soft and pliable leather. The cowhide is popular and long wearing. The goatskin offers the best dexterity.
- Protectors for one finger mittens and bell cuff gloves are also available. Contact customer service for ordering information.
- Order by rubber glove size. Bashlin offers whole sizes only. Round half sizes up to the next whole size for proper fit. For 40KV gloves, add 1 full size for proper fit.

FOR EXAMPLE:

Linemen's glove size 9 1/2 = protector size 10

Linemen's glove size 10 = protector size 10

ORDER NUMBER/SPECIFICATIONS:

	USAGE/ VOLTAGE	O.A.L. LENGTH/STYLE	MATERIAL	WT.
No. 910	Low	8" with strap	Goatskin	0.4 lb.
No. 999S	Low	9" with strap	Goatskin	0.4 lb.
No. 999	Low	9"	Goatskin	0.4 lb.
No. 1050-3	High	12"	Cream Cowhide	0.6 lb.
No. 1200-3	High	12"	Goatskin	0.6 lb.
No. 1057-3	High	12"	Buck Tan Cowhide	0.6 lb.
No. 1050-3BC	High	12" Bell Cuff	Cream Cowhide	0.6 lb.
No. 1200-3BC	High	12" Bell Cuff	Goatskin	0.6 lb.
No. 1057-3BC	High	12" Bell Cuff	Buck Tan Cowhide	0.6 lb.
No. 1050-5	High	14"	Cream Cowhide	0.7 lb.
No. 1200-5	High	14"	Goatskin	0.7 lb.
No. 1057-5	High	14"	Buck Tan Cowhide	0.7 lb.
No. 1050-3-1F	High	12" Mitten	Cream Cowhide	0.6 lb.
No. 1050-3-1FBC	High	12" Mitten/Bell Cuff	Cream Cowhide	0.7 lb.



580M

581K

RUBBER GLOVE LINERS

- Glove liners warm the hand in winter and absorb summer perspiration. One size fits all.

No. 580M	Mitten liner	Wt. 0.1 lb.
No. 581K	Liner with knit cuff	Wt. 0.1 lb.



WARNING: Users are responsible for specifying the correct protector length. For minimum distance requirements between the glove gauntlet and protector cuff, see ASTM F496 Table 4. Failure to maintain the proper distance between the gauntlet and cuff may cause accidental injury or death.

RUBBER SLEEVES, CLIMBER GUARDS, AND CLEANERS



RUBBER SLEEVE

SALISBURY LINEMEN'S RUBBER SLEEVES


- Flexible curved arm sleeves.
- Bashlin offers black and yellow/black sleeves.

	CLASS	TEST VOLTAGE	COLOR	LENGTH
No. SLR-10Y	1	10,000v	Yellow	26 1/2"
No. SLL-10Y	1	10,000v	Yellow	28"
No. SLXL-10Y	1	10,000v	Yellow	29 1/2"
No. SLR-20B	2	20,000v	Black	26 1/2"
No. SLL-20B	2	20,000v	Black	28"
No. SLXL-20B	2	20,000v	Black	29 1/2"
No. SLR-20YB	2	20,000v	Yellow/Black	26 1/2"
No. SLL-20YB	2	20,000v	Yellow/Black	28"
No. SLXL-20YB	2	20,000v	Yellow/Black	29 1/2"
No. SLR-30Y	3	30,000v	Yellow	26 1/2"
No. SLL-30Y	3	30,000v	Yellow	28"
No. SLXL-30Y	3	30,000v	Yellow	29 1/2"

Sleeve Sizing: Measure the distance from the top of the shoulders (between the base of the neck and the shoulder bone) to the wrist bone.



Yellow and red sleeves are available upon request. Contact us for complete information.

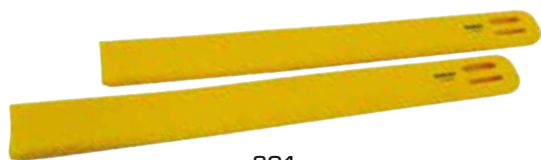

801

801 CLIMBER GUARD

- Manufactured by the dipping process using the same formulation of rubber as our lineman's insulating gloves and sleeves.
- Furnished un-slit to accommodate any length, regular or adjustable climbers.
- Sold in pairs.

No. 801 Climber guard Wt. 1.0 lb.



SH1



SS2



SF4

SLEEVE ACCESSORIES

No. SH1 Harness (1 required) Wt. .25 lb.
No. SS2 Straps (1 pair required) Wt. .20 lb.
No. SF4 Screw type fasteners (4 in package) Wt. .10 lb.



805S

GLOVE DUST

- Bashlin's glove dust lubricates while it absorbs moisture and perspiration. It will not damage natural rubber gloves.

No. 805-4 Glove Dust (4 - 1 quart) Wt. 5.5 lb.
No. 805S Dust filled shaker only (6 oz.) Wt. 1.0 lb.

GROUNDING EQUIPMENT AND POLE BAND



719

POLE BAND

- This is a quick and easy way of marking and tagging lines during storms and routine switching. The band is easy to spot and holds a card in a weather resistant pouch with all of the necessary information.
- Secures to pole using Hook-N-Loop.

No. 719 "WORKER ON LINE" pole band Wt. 2.0 lb.
No. 719-CAUTION "CAUTION" pole band Wt. 2.0 lb.



GROUNDING EQUIPMENT

Contact Bashlin for your grounding needs. We offer 2/0 cable and a variety of standard clamps. In addition we can help you select the correct equipment for your particular requirements.

Please provide the following information and we will quote a price:

- Location/apparatus to ground
- Clamp design and size
- Cable length
- System fault current



930T

TRUCK GROUND

- This device will provide a quick, temporary ground when one is needed.
- A 5' rod is threaded into a ground rod driver.
- The driver can then be used to drive and remove the temporary ground.
- This device works in most rocky or frozen soil.
- The cable and clamps are not included.

No. 930T 5/8" threaded driver only Wt. 19.0 lb.
No. 930TG Threaded driver with a 5' rod Wt. 23.0 lb.

LINEMEN'S BLANKETS, PVC SHEETING



LB127/LB136




LBSV118

LINEMEN'S BLANKETS

- These linemen's blankets are available in Type I natural rubber and Type II ozone resistant synthetic material.
- They meet or exceed all current ASTM specifications.

	TYPE	SIZE	COLOR	RATING	WT.
No. LB127	I	27" x 36"	Black	20,000v	6.25 lb.
No. LB136	I	36" x 36"	Black	20,000v	8.5 lb.
No. LBS127	II	27" x 36"	Orange	40,000v	6.25 lb.
No. LBS136	II	36" x 36"	Orange	40,000v	8.5 lb.

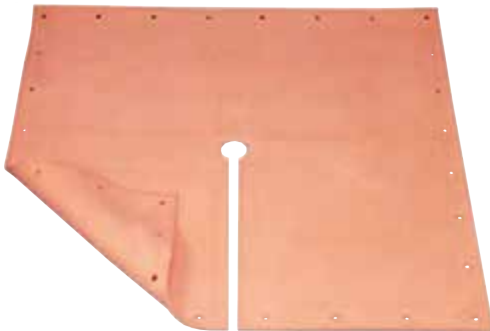

LBS136SL

SLOTTED LINEMEN'S BLANKET

- These Type II blankets are available with 2" or 4 1/2" center holes.

	CTR. HOLE	SIZE	COLOR	RATING	WT.
No. LBS136SL	2"	36" x 36"	Orange	40,000v	8.0 lb.
No. LBS136SL-4	4 1/2"	36" x 36"	Orange	40,000v	8.0 lb.

ZIP-ON BLANKETS

- These Type II blankets use Hook-N-Loop fasteners for easy application. They are ideal for cross arm braces and primary elbows.

	SIZE	COLOR	RATING	WT.
No. LBSV118	18" x 36"	Orange	40,000v	1.75 lb.
No. LBSV127	27" x 36"	Orange	40,000v	8.5 lb.



PVC136-50

PVC INSULATING SHEETING

- **Designed for one use only.** This is an excellent alternative to standard linemen's blankets for low voltage applications.
- Tested to 10kV and meets all of the appropriate ASTM standards.

No. PVC136-50	Sheeting - 48" x 50" roll	Wt. 61.0 lb.
No. PVC136FB	Fiber storage box	Wt. 19.0 lb.
No. PVC136-30	36" x 30' roll	Wt. 50.0 lb.

BLANKET CLAMPS, RESCUE STICK AND DIELECTRIC MATTING



LBC160




LBCP160

CLAMPS

- Clamps reduce mechanical wear on blankets.

No. LBC160	8" wood clamp	Wt. 0.5 lb.
No. LBCP160	9 1/2" nylon clamp	Wt. 0.5 lb.

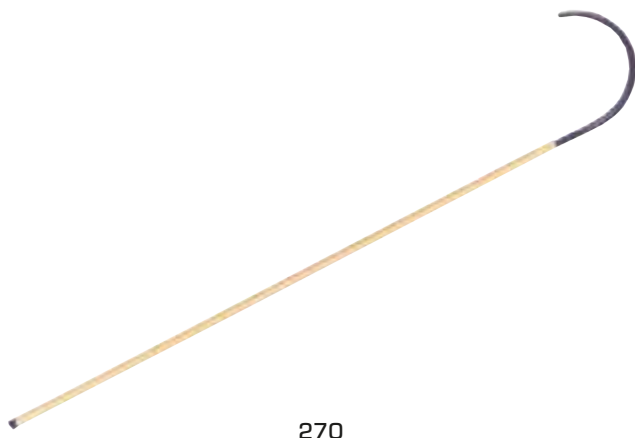

270

RESCUE STICK

- This hot stick has a large radius hook. Designed to remove injured workers from electrical contact, it is tested to 100kV per foot and is 1 1/4" in diameter.

No. 270	Rescue hook - 6' long	Wt. 4.0 lb.
No. 270B	Protective bag	Wt. 1.5 lb.



700TF

700TF - THE FINGER

- The Finger is a safe and convenient way to lubricate your hoses. Simply clip can of silicone spray into the metal clips. When you pull your hose over "The Finger," the hose is spread, and the spray is directed into the inner skirt of the hose.
- The Finger can be mounted in your vise, fixed to the tailboard of your truck or permanently mounted inside the bin door.

No. 700TF	The Finger	Wt. 0.2 lb.
------------------	------------	-------------



DIELECTRIC MATTING

DIELECTRIC MATTING

- This grooved matting is made for use around high voltage electric apparatus.
- It meets or exceeds the ASTM specifications.
- Type I matting, available in 20kV to 50kV rating.
- The standard widths range from 24" to 48".

PART NO.	570	571	572	573
THICKNESS	3/16"	1/4"	3/8"	1/2"
WIDTH	20KV	30KV	40KV	50KV
24"	2.6 lb./ft.	3.4 lb./ft.	5.5 lb./ft.	7.6 lb./ft.
36"	3.8 lb./ft.	5.1 lb./ft.	8.1 lb./ft.	11.3 lb./ft.
48"	5.2 lb./ft.	6.8 lb./ft.	11.0 lb./ft.	15.2 lb./ft.
FEET/ROLL	75/150	75/150	80	60

i IMPORTANT ORDERING INFORMATION: The matting is sold in approximate lengths. This is due to the manufacturing process. There are additional charges for exact lengths, one piece rolls, or lengths less than a full roll. See the price list and contact customer service for complete information.

INSULATING LINE HOSE, CONNECTORS, COVERS

LINE HOSE

- Bashlin offers Type II ozone resistant line hose in straight or connector end design. This conventional line hose is available in 4 1/2' and 6' lengths.



555-24-45



550-25-45

STRAIGHT LINE HOSE:

	SIZE	CLASS	WT.
No. 550-25-45	1 1/4" x 4 1/2'	2	5.75 lb.
No. 550-25-6	1 1/4" x 6'	2	6.0 lb.
No. 550-50-45	1 1/2" x 4 1/2'	3	7.0 lb.
No. 550-50-6	1 1/2" x 6'	3	7.0 lb.

CONNECTOR END LINE HOSE:

	SIZE	CLASS	WT.
No. 555-25-45	1 1/4" x 4 1/2'	2	7.0 lb.
No. 555-25-6	1 1/4" x 6'	2	7.25 lb.
No. 555-50-45	1 1/2" x 4 1/2'	3	8.0 lb.
No. 555-50-6	1 1/2" x 6'	3	10.75 lb.



550-25

550-50C

LINE HOSE CONNECTORS:

	SIZE	CLASS	WT.
No. 550-25C	1 1/4" x 12"	2	3.25 lb.
No. 550-50C	1 1/2" x 12"	3	3.0 lb.



560-2

INSULATOR COVERS

- Salisbury Type II Insulator Covers for conventional line hose are available in 1", 1 1/4", and 1 1/2" diameters.

	INSULATOR TYPE	LINE HOSE DIAMETER	CLASS	WT.
No. 560-2	55-4	1"	2	7.0 lb.
No. 560-3	55-5	1 1/4" - 1 1/2"	3	8.0 lb.



2464



2464

POLE GUARDS


- Made of high impact grade ABS plastic, the natural spring action holds this temporary insulation in place.
- Maximum use voltage should not exceed 26kV to ground, 44kV phase to phase, and limited to "brush" contact.

No. 2464	12" diagonal x 4' long	Wt. 15.0 lb.
No. 2466	12" diagonal x 6' long	Wt. 22.0 lb.
No. 216	Pole guard bag 12" x 78"	Wt. 4.0 lb.

TRAVELING GROUNDS

The Bashlin 1590C and 336A traveling grounds reduce the possibility of electric shock due to accidental contact with energized conductors during stringing operations.

They are heavy duty units designed for conductors measuring up to and including 336MCM and 1590MCM respectively.

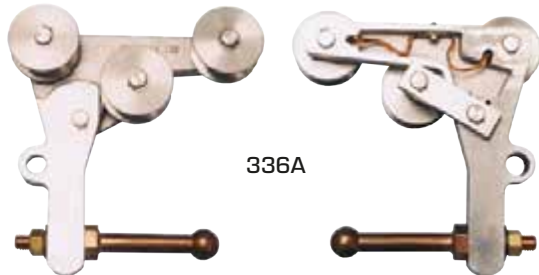


336A

No. 336A

Traveling ground


Wt. 3.0 lb.

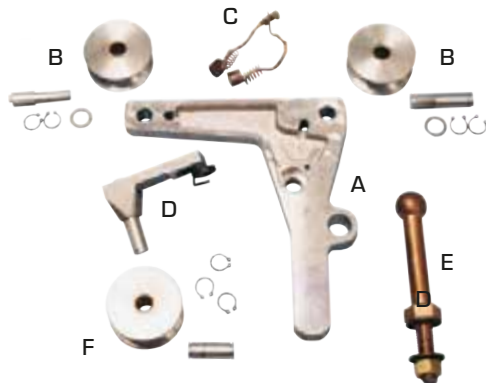

336A REPLACEMENT PARTS

- This unit is designed for field repairs.
- The replacement parts are packaged to allow complete, easy replacement.

No. 336A-1	(A) Frame	Wt. 0.6 lb.
No. 336A-2	(B) Frame sheaves (2) with axle bolts, washers, and snap rings	Wt. 0.6 lb.
No. 336A-3	(C) Brush set (2 pc.) with springs and screws	Wt. 0.1 lb.
No. 336A-4	(D) Tension arm assembly, including spring, axle, snap ring, and washer (sheave is not included)	Wt. 0.7 lb.
No. 336A-5	(E) Ground stud (only)	Wt. .75 lb.
No. 336A-6	(F) Tension arm sheave with axle bolt, washer, and snap rings	Wt. 0.4 lb.
No. 336A-8	Carrying case (not pictured)	Wt. 0.4 lb.

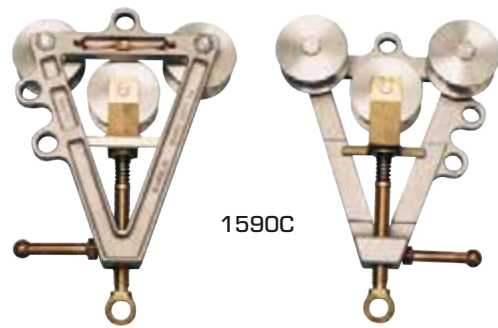


1590C

No. 1590C

Traveling ground

Wt. 12.0 lb.

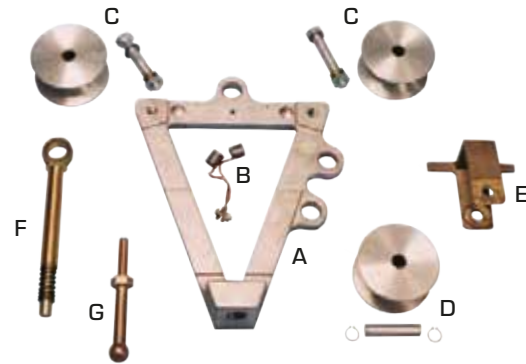

1590C REPLACEMENT PARTS

- This unit is designed for field repairs.
- The replacement parts are packaged to allow complete, easy replacement.

No. 1590C-1	(A) Frame with heli-coil	Wt. 3.75 lb.
No. 1590C-2	(B) Brush set (2 pc.) with springs and screws	Wt. 0.2 lb.
No. 1590C-3	(C) Frame sheaves (2 pc.) with axle, washers, and snap rings	Wt. 1.5 lb.
No. 1590C-4	(D) Yoke sheave (1 pc.) with axle, washers, and snap rings	Wt. 0.7 lb.
No. 1590C-5	(E) Yoke (only)	Wt. 1.5 lb.
No. 1590C-6	(F) Eyebolt assembly with spring, snap ring, and thrust washer	Wt. 1.5 lb.
No. 1590C-7	(G) Ground stud (1)	Wt. .75 lb.
No. 1590C-8	Carrying case (not pictured)	Wt. 0.5 lb.



WARNING: Test results have demonstrated the **336A** meets the short circuit requirements to be rated **Grade 3** per ASTM F885 requirements.

Test results have demonstrated the **1590C** meets the short circuit requirements to be rated **Grade 5** per ASTM F885 requirements.

Do not use these units unless the rating falls within the energy for the system on which the ground is used.

NOTES:

A series of horizontal dotted lines for taking notes.



GLOVES, PPE, BOOKS AND TRAINING

In an effort to provide for the complete needs of linemen, **Bashlin Industries, Inc.** offers products for comfort and protection from the elements. This includes top quality work gloves, and hard hats.

KUNZ WORK GLOVES

Bashlin offers quality Kunz all leather work gloves. These gloves have been made in the USA since 1900. The Kunz glove features durable wear qualities and outstanding comfort. They are the choice, along with Bashlin products, for the professional lineworker.



556

956

DRIVER'S GLOVE

- Developed as a quality alternative to the imported canvas-leather gloves used in light work and by machine operators.
- A major utility found that even with a higher initial cost, the wear qualities of the 956 made it an economical alternative to less expensive products.
- Specify size.

No. 556	Cowhide driver's glove 4" cuff	Wt. 0.5 lb.
No. 956	Cowhide driver's work glove	Wt. 0.5 lb.
No. 956E	Buckskin driver's work glove	Wt. 0.5 lb.



390

400

FOREMAN'S GLOVE

- Bashlin stocks a medium duty foreman's glove for lighter applications. They are available in buckskin and include the "davy" tips for seam protection on the fingers.
- Specify size.

No. 390	Foreman's glove	Wt. 0.6 lb.
No. 400	Foreman's glove with gauntlet	Wt. 0.7 lb.



148

150

120

HEAVY DUTY WORK GLOVES

- The Kunz work glove features reinforced thumb straps and outside seams with tip protectors.
- Specify size.

No. 148	Medium buckskin	Wt. 1.0 lb.
No. 150	Heavy buckskin	Wt. 1.0 lb.
No. 120	Heavy top grain cowhide	Wt. 1.0 lb.



145

CLIMBING GLOVES

- Kunz trainer gloves are designed to protect the arms of the beginning climber.
- The 8" cuffs are made of heavy split cowhide, with a cotton backing, and cover most linemen nearly to the elbow reducing the chance of injury.
- Specify size.

No. 145	Training glove (please state numerical whole hand size)	Wt. 0.7 lb.
----------------	---	-------------



EDWARDS GLOVES, KNEE PADS



B813



602A

602AT

500K

LINEMEN'S PROTECTOR GLOVES

- Edwards gloves are an economical choice for your leather protector needs. These cowhide gloves meet ASTM requirements.
- Specify size.

No. B813	12" cowhide primary protector	Wt. 0.4 lb.
No. B814	13" cowhide primary protector	Wt. 0.4 lb.
No. B815	14" cowhide primary protector	Wt. 0.4 lb.

DRIVER'S GLOVES

- Edwards cowhide work gloves provide good value for the dollar.
- Sold by the dozen.
- Specify size.

No. 602A	Leather driver's glove	Wt. 3.5 lb.
No. 602AT	Insulated driver's glove	Wt. 3.7 lb.
No. 500K	Canvas back glove	Wt. 3.4 lb.



B609

- Low voltage goatskin protectors are available with or without a pull strap.
- Specify size.

No. B609	10" goatskin protector	Wt. 0.3 lb.
No. B639	10" goatskin protector	Wt. 0.3 lb.



815

KNEE PADS

- This is the original "Knee-Pro" protector. It features 1/2" foam pads, a thick plastic shell, and non-skid grips for extra comfort.

No. 815	Knee pads	Wt. 1.0 lb.
----------------	-----------	-------------



SIZE:

- Sized according to the circumference of the hand below the base of the fingers, on a line parallel to the base of the finger crotches, passing through the thumb crotch. Add 1" to the measurement for the proper size.

PLEASE PROVIDE GLOVE SIZE.

SMALL: 8 - 8 1/2	MEDIUM: 9 - 9 1/2
LARGE: 10 - 10 1/2	X-LARGE: 11 - 11 1/2

RODEO, TRAINING PRODUCTS

Bashlin offers the official training products used at the National Linemen's Rodeo. We have been a proud sponsor and supporter of this event since 1987.



57N



57A

POLE TOP RESCUE STRAP

- This unit helps the lineworker truly simulate cutting a victim down from a pole without destroying perfectly good equipment.
- It holds a rescue dummy in place so the rescue can be performed. Note: One set of 57A inserts are included with this unit. Additional inserts must be purchased separately.

- No. 57N** Rescue strap assembly. Two short snap/buckle sections, one double buckle section to go around the pole, and two inserts Wt. 6.0 lb.
- No. 57A** Replacement insert. One insert is 12" long with 4 holes, so it can be cut up to 3 times Wt. 0.5 lb.



WARNING: The 57N is only for holding a mannequin or weight in position. It is not for personnel support.



35

3550

960Y



650RDB



PD100-50

PD100-38

LINEMAN'S RODEO TOOLS

- | | | |
|---------------------|----------------------------------|-------------|
| No. 650RDB | Ditty bag | Wt. 0.2 lb. |
| No. PD100-38 | 3/8" slack block rope by the ft. | Wt. 1.0 lb. |
| No. PD100-50 | 1/2" hand-line by the ft. | Wt. 1.0 lb. |
| No. 35 | Hand-line hook | Wt. 0.5 lb. |
| No. 960Y | 1/2" adjustable sling 28"- 48" | Wt. 0.3 lb. |
| No. 3550 | Hand-line block | Wt. 1.2 lb. |
| No. 111SK | Leather knife sheath (page 15) | Wt. 1.0 lb. |



RR165



632RR

RESCUE RANDY

- Official rescue mannequin of the Linemen's Rodeo.
- Lifelike, durable, articulated joints and weight distribution.
- Great for pole top and bucket rescue.

- No. RR165** 165 lb. mannequin Wt. 175.0 lb.
- No. 632RR** Waist belt for mannequin Wt. 2.0 lb.



Replacement parts for Rescue Randy are available. Contact customer service for information.

HARD HATS/LINERS



ME3-Y

ME3-B

ME3-O

ME3 HARD HAT

- Features a standard style brim and a ratchet adjustment.
- Available in white, yellow, orange or blue.

No. ME3-W	White hard hat	Wt. 1.0 lb.
No. ME3-Y	Yellow hard hat	Wt. 1.0 lb.
No. ME3-O	Orange hard hat	Wt. 1.0 lb.
No. ME3-B	Blue hard hat	Wt. 1.0 lb.



BE4-O

BE4-B

BE4: FULL BRIM HARD HAT

- Especially popular in warmer climates.
- Features a full style brim and a ratchet adjustment.
- Available in white, yellow, orange or blue.

No. BE4-W	White hard hat	Wt. 1.0 lb.
No. BE4-Y	Yellow hard hat	Wt. 1.0 lb.
No. BE4-O	Orange hard hat	Wt. 1.0 lb.
No. BE4-B	Blue hard hat	Wt. 1.0 lb.



EL27B

HAT LINERS


- Made of flame retardant, preshrunk cotton twill.
- Thermal lined and have elastic web chin straps.
- One size fits all.
- Made in the USA.

No. EL27B-0	Medium length extending below the collar	Wt. .25 lb.
No. EL29B-0	Extra length extending below the collar	Wt. 0.4 lb.
No. EL23BFM-0	Medium length with a face mask, held in place with velcro fasteners	Wt. 0.4 lb.

HARD HAT ACCESSORIES

No. B304-1	Sweatbands (box of 10)	Wt. 0.5 lb.
No. ME91R	Suspension (ratchet adjustment)	Wt. .25 lb.
No. M94	Chin strap	Wt. 0.4 lb.

EDUCATION/TRAINING




831

TEXTBOOKS

- **The Lineman's and Cableman's Handbook**
by Kurtz and Shoemaker
This is the primary source of basic information for power lineworkers.

No. 831

Wt. 3.25 lb.




833

- **Standard Handbook for Electrical Engineers**
by Fink and Beaty
Here is a ready reference for engineering and design of electric systems.

No. 833

Wt. 4.75 lb.



834

- **American Electrician's Handbook**
by Croft and Summers

If you are an electrician needing a ready, quick reference, this is the book for you.

No. 834

Wt. 4.75 lb.



Bashlin offers the most recent edition of these books. It may or may not be the one illustrated, but it will be the newest available.



BASHLIN PRODUCT INFORMATION BOOKLETS

- Contains essential information regarding Bashlin products.
- Correct sizing, inspection, and care/maintenance of the products.
- These FREE booklets are available for the asking and are included in all new Bashlin products.

No. **BLCL-514** Climbers and accessories Wt. 0.1 lb.

No. **BLBH-514** Linemen's equipment Wt. 0.1 lb.

No. **PFPE-405** Fall protection equipment Wt. 0.1 lb.

BASHLIN INDUSTRIES, INC. | PRODUCT INDEX

A

Adjustable Rope Slings 72

Aerial Bags 63, 64

Anchor Straps 50

Anchorage, Care and Maintenance 52

Anchorage 50

Auger Wind Ups 72

B

Back Packs 58

Bags, Rodeo Ditty Bag 92

Bags, Back Packs 58

Bags, Blanket 61

Bags, Gear Bags 58, 59

Bags, Glove and Sleeve 60

Bags, Ground Set 62

Bags, Hot Stick 62

Bags, Nut and Bolt Bags 12, 13

Bags, Rescue Stick 62

Bags, Roller Bags 59

Bags, Line Hose 00

Belts, 2 D-Ring 10

Belts, 4 D-Ring 8, 9

Belts, Auxiliary Positioning 11

Belts, Care and Maintenance 31

Belts, Electrician 78

Belt, Sizing 6

Belts, Styles 7

Belts, Supporter 10

Belts, Suspenders 11

Belts, Groundman 78

Blanket Bags 61

Blanket Cannister 61

Blanket Clamps 85

Blanket Rolls 61

Blankets, Rubber 84

Blocks 72, 92

Booklets, Product Information 94

Books, Education 94

Bucket Cover 67

Bucket Hooks 66, 67

Bucket Knuckle 66

Bucket Rescue Equipment 55

Buckets 63

Bug wrenches 28

C

Carabiners 51

Chain Hoist 74

Chain Saw Holder 67

Channel Locks 29

Climber Accessories 22, 23

Climber Guard 82

Climber Pad, Hook-N-Loop 20, 21

Climber Pads 20, 21

Climber Parts 22, 23

Climbers, Aluminum 18

Climbers, Steel 18, 19

Climbers 17

Climbing Harnesses 41

Compression Tool Bag 64

Confined Space Harnesses 42

Connectors 51

Cross Arm Iron 75

Cutters 76

D

Descenders 51

Dielectric Harnesses 40

Dielectric Matting 85

Double Eye Slings 70

E

Endless Slings 70

F

Fall Protection Information 34

Fall Restriction Device 24

Fixed Length Rope Slings 72

Folding Rules 30

G

Gaff Gauge 23

Gaff Guards 23

Gaff Shaping Kit 23

Gaffs, Replacement 23

Glove Bags 60

Glove Dust 82

Gloves, Climbing 90

Gloves, Edwards Work Gloves 91

Gloves, Foreman 90

Gloves, Kunz Work Gloves 90

Gloves, Leather Protectors 81, 91

Gloves, Liners 81

Gloves, Rubber Lineman 80

Gloves, Sizing 80

Gloves, Driver 90, 91

Grip Slings 70

Ground Rod Driver 75

Grounding Equipment 75, 83, 87

H

Hammers 30

Hand Tools 28, 29, 30

Handline Block 72

Handline Carrier 16

Handline Hooks 72

Handline Parts 72

Handlines 72

Hard Hat Accessories 93

Hard Hat Liner 93

Hard Hats 93

Harness Bag 64

Harnesses Arc Flash, Back Attachments 36

Harnesses Arc Flash, Care and Maintenance 35



BASHLIN INDUSTRIES, INC. | PRODUCT INDEX

Harnesses Arc Flash, Options 37
 Harnesses Arc Flash, Sizing 36
 Harnesses Arc Flash, Styles 36, 38, 39, 40, 41, 42
 Heel Cover 23
 Hoists 74
 Holsters, Bell Wrench..... 15
 Holsters, Electrician..... 78
 Holsters, Groundman 16
 Holsters, Lineman..... 14, 15
 Holsters, Lowell Wrench 15
 Holsters, Skinning Knife 15
 Holsters, Accessories..... 15
 Hot Stick Bags 62
 Hot Sticks 77

I

Insulator Covers..... 85

K

Klein Bell Wrench..... 28
 Klein Adjustable Wrenches 28
 Klein Lineman Pliers..... 29
 Knee Pads..... 911

L

Ladder Snaphooks..... 51
 Lanyards Arc Flash, Care and Maintenance..... 49
 Lanyards Arc Flash, Shock Absorbing..... 43, 44, 45, 46, 47
 Lanyards Arc Flash, Twin Leg 46, 47
 Leather Care 16
 Line, Pilot 73
 Line, Pulling 73
 Line, Winch Lines 73
 Line Hose 86

Line Hose Bags 61
 Line Hose Connectors..... 85
 Line Hose Lubrication Tool..... 85
 Lowell Ratchet Wrenches 28

M

Mink Oil..... 16

N

Neatsfoot Oil 16
 Nylon Slings..... 70, 71

P

Para-Pak..... 53
 Patriot, WPF RD..... 24
 Pay-Out Reels 75
 Penta Socket..... 28
 Pilot Line..... 73
 Pole Band 83
 Pole Gaffs 23
 Pole Slings..... 70
 Pole Straps 25
 Pole Top Rescue Strap 92
 Positioning Lanyards 48
 Pulling Grips 74
 Pulling Line 73
 PVC Insulating Sheeting..... 84

R

Replacement Gaffs 23
 Rescue Equipment..... 53, 54, 55
 Rescue Randy 92
 Rescue Stick..... 85
 Retractable Lifelines..... 56
 Rodeo Products 92
 Roller Bags 59
 Rope 92
 Rope, Descent Device 51
 Rope Secondary, Care and Maintenance 31
 Rope Secondary 26, 27

Rope Slings..... 71
 Rope Snaphooks..... 51

S

Saddle Soap..... 16
 Safety Hook 67
 Screwdrivers 30
 Self Rescue Equipment..... 53, 54, 55
 Shotgun Sticks 77
 Skinning Knives 29
 Slack Blocks 72
 Sleeve Accessories..... 82
 Sleeve Bags 60
 Sleeves, Rubber Lineman 82
 Splicers Bag 63
 Staple Sticks..... 30
 Strap Hoist..... 74
 Suspension Trauma 54

T

Tape Slings 16
 The Finger..... 85
 Tool Apron..... 66
 Tool Bags 58, 59
 Tool Boards..... 65, 66
 Tool Snaps 16
 Tool Tray..... 66
 Transformer Slings 72
 Traveling Grounds..... 87
 Tree Gaffs..... 23
 Truck Ground 83

U

URD Disconnect Tool..... 76

W

Winch Line 73
 Winch Line Maintenance 73
 Wire Basket 75
 WPF RD 24

BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

2.....	23	24HSC SERIES	62	53N-2HL.....	25
2SC	23	24RBC SERIES	61	54N-2HL.....	25
3.....	22	24RBR SERIES	61	57 SERIES.....	92
4G	22	24SL SERIES.....	60	76PAT.....	24
4HP	15	24SLGP SERIES.....	60	76PAT-OR.....	24
4HPX.....	15	25A SERIES.....	12	76PAT-ORC.....	24
4STR.....	15	25AM2 SERIES.....	12	76PAT-T.....	24
4T.....	22	25BS	13	78A-2HL.....	25
5.....	23	25KLBS	13	78B-2L.....	25
8D	28	25PLS	13	78C-2HL.....	25
10HB.....	64	25PS	13	78X-2HL.....	25
10S SERIES.....	58, 62	25R	13	80.....	11
11BP SERIES.....	58	26DRM.....	13	80HDS.....	11
11BPD SERIES	58	26G	13	80X	11
11BPM SERIES.....	58	26L.....	13	81.....	11
11DC SERIES.....	59	27.....	23	81-1	11
12S SERIES.....	59	31L.....	16	83BDH.....	11
14.....	23	31R	16	83H2D	11
14 GLOVE SERIES.....	80	32A	16	85N	22
14ATS.....	22	32AR	16	85NP	22
14ATSB	22	32B	16	86N	22
14P	23	32BR	16	86NP	22
14T.....	23	33.....	16, 72	87N	22
14TS	22	33L.....	16, 72	87NP	22
14TSB	22	35.....	72, 92	88.....	10
15.....	30	35GP	72	88BIX4DCC.....	9
15FG	30	41NW-2HL.....	25	88BMX4D	9
16- GLOVE SERIES	80	42NW-2HL.....	25	88BMX4DCC.....	9
16ATS.....	22	43NW-2HL.....	25	88BMX4DMP	9
16TS	22	44NW-2HL.....	25		
18 GLOVE SERIES.....	80	47N-15.....	25		
18 SERIES BUCKETS	63	47N18	25		
23 SERIES BUCKETS	63	51N-2HL.....	25		
24 SERIES	60	52N-2HL.....	25		



BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

88BSX4DCC.....	9	111HLSX.....	14	270B.....	62, 85
88GX4DCC.....	8	111HS.....	14	300A.....	74
88GX4DMP.....	8	111HSX.....	14	300DA.....	74
88MX4DCC.....	8	111JBS.....	78	336A SERIES.....	87
88MX4DMP.....	8	111JBSX.....	78	390 GLOVE SERIES.....	90
88UX4DCC.....	8	111JLMS.....	78	400 GLOVE SERIES.....	90
88UX4DMP.....	8	111JLMSX.....	78	420G.....	29
88X.....	10	111LWH.....	15	430G.....	29
88X4D.....	9	111LWHX.....	15	443A.....	72
89N.....	22	111SK.....	15,92	470.....	72
89NP.....	22	111SKX.....	15	500K GLOVE SERIES.....	91
100TDE.....	28	111YS.....	78	550 SERIES.....	86
101TDE.....	28	111YSX.....	78	555 SERIES.....	86
103TDE.....	28	112CIL.....	78	556 GLOVES.....	90
105 PADS.....	20	112CILX.....	78	560 SERIES.....	86
110D PADS.....	21	112HLS.....	16, 78	567 SERIES.....	77
110Y GLOVE SERIES.....	80	112HLSX.....	16, 78	580M.....	81
1100Y GLOVE SERIES.....	80	120 GLOVE SERIES.....	90	581K.....	81
111BWH.....	15	130D PADS.....	21	600-12.....	30
111BWHX.....	15	140D PADS.....	21	600-4.....	30
111HE.....	14	140Y GLOVE SERIES.....	80	600-6.....	30
111HEX.....	14	145 PADS.....	20	600-8.....	30
111HLDS.....	14	145 GLOVE SERIES.....	90	602A.....	91
111HLDSE.....	14	148 GLOVE SERIES.....	90	602AT.....	91
111HLDSX.....	14	150 GLOVE SERIES.....	90	607-7DD.....	30
111HLDSXE.....	14	150-12.....	28	625.....	78
111HLE.....	14	150T PADS.....	21	628.....	78
111HLEX.....	14	150V PADS.....	21	630.....	78
111HLS.....	14	160N.....	10	632RR.....	92
		210 SERIES.....	61	650RDB.....	92
		212 SERIES.....	61	656CM.....	10
		216.....	86	656PX.....	10
		217.....	62	662AA.....	39
		270.....	85	662AB.....	39



BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

662AC	39	703R-2D.....	50	900-6.....	30
662ACS.....	42	706.....	63	901LT	75
662AD	39	706-20	64	901TI.....	75
662GA	39	706S	63	902 SERIES	75
662GD	39	708 SERIES	65, 66	903LT	74
662IA	39	712 SERIES	66	910 GLOVE SERIES.....	81
662ID	39	717.....	63	930.....	75
662RA	39	719.....	83	930 SERIES	83
662RB	39	719-CAUTION.....	83	930T.....	83
662RC	39	721AM	64	930TG	83
662RD	39	722AM	64	930UT	75
662VA.....	40	723AM	64	940 SERIES	72
662VD	40	724.....	66	945 SERIES	72
683GA	38	726.....	64	950 SERIES	70
683GD	38	727L.....	66	951 SERIES	70
683IA	38	731CS	67	952 SERIES	70
683ID	38	744.....	67	953 SERIES	70
683XA	38	745.....	67	956 GLOVE SERIES.....	90
683XAP	41	750DE SERIES.....	73	960 SERIES	71
683XB	38	750MP SERIES.....	73	960Y.....	71, 92
683XBP	41	770R	71	962 SERIES	71
683XC	38	770RDE.....	71	962NWTS	71
683XC6EQT	42	770W	71	965 SERIES	71
683XCP	41	801.....	82	999 GLOVE SERIES.....	81
683XD	38	804.....	16	1050 GLOVE SERIES.....	81
683XDP	41	805 SERIES	82	1057 GLOVE SERIES.....	81
683XDT	42	806 SERIES	16	1200 GLOVE SERIES.....	81
696NW	55	809.....	16	1511N	10
700BK	66	815.....	91	1515PX	8
700FP.....	55	831.....	94		
700FWI.....	55	833.....	94		
700TF.....	85	834.....	94		
703.....	50	884D	9		
703R	50	900 SERIES	75		



BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

1515PX4D.....	8	2302 SERIES.....	45	8690FH.....	76
1515PX4DCC.....	8	2305 SERIES.....	45	11417N.....	30
1550-4.....	29	2306 SERIES.....	45	44005.....	29
1570-3.....	29	2315 SERIES.....	45	44218.....	29
1590C SERIES.....	87	2317 SERIES.....	45	44219.....	29
1671-10.....	74	2327 SERIES.....	47	B100G-100.....	56
1672-10.....	74	2328 SERIES.....	47	B110G-25.....	56
1685-20.....	74	2464.....	86	B110G-50.....	56
1685-31.....	74	2466.....	86	B120G-30.....	56
1686-10.....	74	2802 SERIES.....	44	B120G-50.....	56
1686-20.....	74	2804 SERIES.....	44	B120G-65.....	56
1849.....	72	2805 SERIES.....	44	B130W-20.....	56
1901 SERIES.....	77	2815 SERIES.....	44	B130W-30.....	56
1967B.....	62, 76	2817 SERIES.....	44	B1972F.....	23
2002NWB SERIES.....	43	2827 SERIES.....	47	B1972G.....	23
2004NWB SERIES.....	43	2828 SERIES.....	47	B304-1.....	93
2005NWB SERIES.....	43	3004.....	51	B3732.....	50
2011 SERIES.....	70	3006.....	51	B609.....	91
2011P SERIES.....	50	3006K.....	51	B6232.....	30
2011P1 SERIES.....	50	3008A.....	51	B639.....	91
2011SE SERIES.....	70	3146.....	28	B662AA.....	40
2012 SERIES.....	70	3200.....	51	B662AD.....	40
2012P SERIES.....	50	3550.....	72, 92	B683XA.....	38
2012SE SERIES.....	70	4002NW SERIES.....	48	B683XD.....	38
2015NWB SERIES.....	43	4004NW SERIES.....	48	B809.....	30
2017NWB SERIES.....	43	4005NW SERIES.....	48	B813.....	91
2027 SERIES.....	46	4016 SERIES.....	27	B814.....	91
2028 SERIES.....	46	4017NW SERIES.....	48	B815.....	91
2028NWB SERIES.....	46	4018 SERIES.....	27	B816.....	30
		4019 SERIES.....	27	B832.....	30
		4950-58Y.....	71	BC136 SERIES.....	61
		4951-58Y.....	71	BC18F.....	76
		5395A.....	51	BC24F.....	76
		8690CK.....	76	BD12 SERIES.....	19

BASHLIN INDUSTRIES, INC. | PART NUMBER INDEX

BD12C SERIES	19	DEQ683XA.....	40	PD100 SERIES.....	92
BD12L SERIES.....	19	DEQ683XD1.....	40	PVC SERIES.....	84
BD14B SERIES	18	DL11DC-R SERIES.....	59	Q662ZA	41
BD16B SERIES	18	DL11DC-RB SERIES	59	Q83H2D.....	11
BD16BC SERIES	18	DNHLH5	72	Q88BMX4D.....	9
BE4 SERIES.....	93	DSD30.....	51	Q88BMX4DCC	9
BED662VDEF.....	42	EL23BFM.....	93	Q88BMX4DP	9
BEDQ683XDI	42	EL27B	93	Q88GX4DCC	8
BHP	23	EL29B	93	Q88GX4DMP	8
BSH20.....	67	FE683EZTWR	41	R9074	28
BSH50.....	67	FE700BMSRSC.....	55	REST	54
BSK20.....	29	FE700SRKSC.....	55	RESTEP	54
BSK25.....	29	HV208	77	REST-SR.....	54
BSK30.....	29	HV212	77	RJL196RCP	76
BSK50.....	29	HV223	77	RR165	92
BSS2000	30	HV225	77	SF4	82
BSS2001	30	HV235	77	SH1	82
BW221	28	LB SERIES.....	84	SH200	77
BW2212	28	LBC160	85	SH216	77
BW223	28	LBCP160	85	SH230	77
BW2237	28	LBS SERIES.....	84	SL6650A	51
BW223HD.....	28	LBSV SERIES.....	84	SLL SERIES	82
BW224	28	LGM2000	74	SLR SERIES	82
BW244	28	LGM4601	74	SLXL SERIES	82
BW251	28	LGM4801	74	SR2804 SERIES.....	53
BW288	28	LMG1000	74	SR700XPL	53
D2000-9NE	29	LMG4500	74	SRPACK-100AL	53
D2000-9NETH	29	LMG4501	74	SS2	82
D213-9BE.....	29	LMG4600	74		
D507-10.....	28	LMG4800	74		
D507-12.....	28	M94.....	93		
D507-8.....	28	ME3 SERIES.....	93		
DEQ662DH1	40	ME91R	93		
DEQ662HA	40	PA2000	74		





119 West Pine Street, P.O. Box 867 Grove City, PA 16127
Phone: 724.458.8340 Fax: 724.458.8342 bashlin@bashlin.com

